# FP Series Sealed Ultra Miniature Pushbutton Switches

#### Features/Benefits

- Ultra-miniature pushbutton
- Multiple poles and throws
- Long life 100,000 cycles
- Vertical and right angle mount
- Sealed against soldering and cleaning processes
- Optional caps
- RoHS compliant

#### Typical Applications

- Networking equipment
- High-end consumer
- Professional instrumentation
- Computer, Server, Modem & Data storage







## Specifications

CONTACT RATING: Max. 0.4 VA (28 V DC or V AC) ELECTRICAL LIFE: 50,000 cycles (FP11 & FP21) 10,000 cycles (FP12 & FP22)

CONTACT RESISTANCE: (10mA @ 2 V DC) 80 m $\Omega$  max. initial INSULATION RESISTANCE: 500M $\Omega$  min. @ 500 V DC - 1 minute

OPERATING TEMPERATURE: -20°C to 80°C

SOLDERABILITY: Per MIL-STD-202F method 208D, or

EIA RS-186E method 9

PACKAGING:

Tray pack - 25 pcs per tray (A1 type terminal)

- 100 pcs per tray (C1 type terminal)

Caps (optional) - Bulk bag; 100 caps per bag.

#### **Materials**

MOVABLE CONTACTS:

Base metal: Phosphor bronze Plating: Gold over nickel plate

FIXED CONTACTS:

Base metal: Brass

Plating: Gold over nickel plate


COVER: PA66 - Black ACTUATOR: PPS - Black BASE: PPS - Black

SUPPORT BRACKET: Steel with tin plate
(A1 type terminal only)

**NOTE:** Specifications and materials listed above are for switches with standard options. For information on specific and custom switches, consult Customer Service Center.

#### **Build-A-Switch**

To order, simply select desired option from each category and place in the appropriate box. Available options are shown and described on pages A-106 thru A-107. For additional options not shown in catalog, consult Customer Service Center.

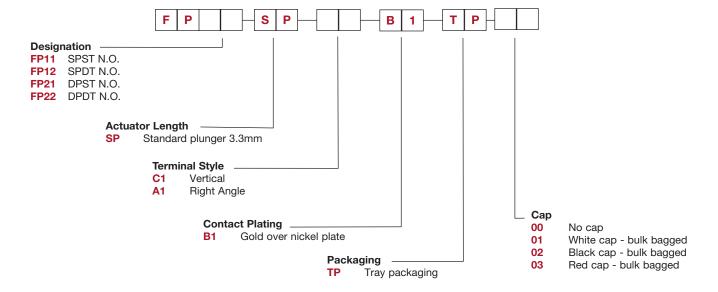




## **FP Series Sealed Ultra Miniature Pushbutton Switches**

## **SWITCH CIRCUIT**

	MODEL NO.	SWITCH FUNCTION		
CIRCUIT		POS. 1	POS. 2	SCHEMATIC
			_	SOILWATE
SPST	FP11	OFF	МОМ	
		CONNECTED TERMINALS		
		OPEN	1-3	1 3
SPDT	FP12	ON	МОМ	• • • • •
		CONNECTED TERMINALS		2 — 3 NC (COMMON) — 1 NO
		2-3	2-1	
	ST FP21	OFF	МОМ	1
DPST		CONNECTED TERMINALS		
		OPEN	1-3,4-6	1 <b>9</b> 13 4 <b>9</b> 16
DPDT	FP22	ON	МОМ	2 — 3 NC
		CONNECTED TERMINALS		(COMMON) : 0—1 NO
		2-3,5-6	2-1,5-4	5 — 4 NO (COMMON) — 4 NO

## **TERMINAL STYLE**

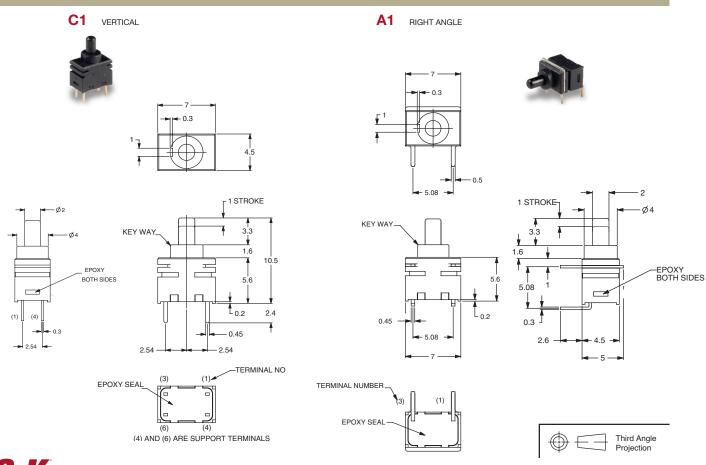




13 Mar 20

Dimensions are shown: mm Specifications and dimensions subject to change


## **ACTUATOR LENGTH**

STANDARD PLUNGER 3.3MM



#### **CAPS**

OPTION CODE	DESCRIPTION
00	NO CAP
01	WHITE CAP, BULK BAGGED
02	BLACK CAP, BULK BAGGED
03	RED CAP, BULK BAGGED



To purchase Caps separately without switch, please use these part numbers


PART #	COLOR
798D01000	WHITE
798D02000	BLACK
798D03000	RED

### **MOUNTING HOLE**


C1 VERTICAL




**FP11** 




**FP12** 



**FP21** 



**FP22** 







13 Mar 20





- 5.08







Projection Dimensions are shown: mm

Specifications and dimensions subject to change

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Switch Bezels / Switch Caps category:

Click to view products by C&K manufacturer:

Other Similar products are found below:

896809000 LW1A-B2-R LW2A-B1-G 704.604.4 704.955.3 F1403 7527 760203000 760503000 766601000 785105000 785106000

MG12KB MH11 MH13 MHU31 MJ1216 MJ1226 MJ33 MJ612 MJ626 MJ627 9001T8BK 908-1634 92-343.200 92-343.400 95804.920

95CAP-011 95CAP-112 11-932.7 99-901.9 99-902.9 99-909.4 99-909.5 99-920.8 A0261A 11-931.2 11-932.5 11-936 AKTSC22B

AT496H AW-RF8 161006 1825068-6 184-1872 187-1872 188-1471 18-920.1 1DFBLK 1D-GRY