Features/Benefits

- Connect headsets and phones
- Answer and hang up for telephone
- · Various lever designs

Typical Applications

- Telecommunication
- Computer peripherals
- Medical devices

Specifications

CONTACT ARRANGEMENT: DPDT COTACT RATING: 0.2 A @ 30 VDC

INITIAL CONTACT RESISTANCE: 50 m Ω max. INSULATION RESISTANCE: 100M Ω min. @ 500 VDC DIELECTRIC STRENGTH: 500 V AC (50-60 Hz) OPERATING TEMPERATURE: -20°C to + 70°C


OPERATING FORCE: 50 ± 20 gf

Materials


LEVER: POM (UL94 HB) COVER: POM (UL94 HB) TERMINAL: Silver plated


NOTE: Specifications and materials listed above are for switches with standard options. For information on specific and custom switches, consult Customer Service Center.

PART NUMBER	LIFE CYCLE	PACKAGING
HS-2206-A1 NS	300,000 cycles	5,000 pieces



E-56


















	TRAVEL POSITION (X)						
1	3	ON		7			OFF
2	3	OFF					ON
4	6	ON					OFF
(5)	6	OFF			厂		ON
	()	1.5M	in.	5.2	Max.	(m/m)









PART NUMBER	LIFE CYCLE	PACKAGING
HS-2206-E NS	100,000 cycles	5,000 pieces



Travel Position (X)					
1	3	ON	\vdash		0FF
2	3	OFF			ON
4	6	ON			OFF
(5)	6	OFF			ON
	(1.51	lin.	5.9Max.	(m/m

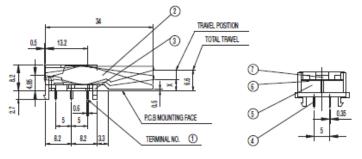





Dimensions are shown: mm Specifications and dimensions subject to change

www.ckswitches.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Basic / Snap Action Switches category:

Click to view products by C&K manufacturer:

Other Similar products are found below:

5SM901-S12 5SM9-S12N195 602EN532 602EN535-RB 602HE5-RB1 604HE162 604HE223-6B 624HE17-RB 6HM82 6HM89 6SE1
6SX1-H58 70500216 70599106 MBD5B1 MBH2731 73-316-0012 EXD-AR20 79211923 79218589 7AS12

MIL30126AB6BBMD4A12XAU ML-1155 ML-1376 831010C3.0 831090C2.EL 83131904 84212012 8AS239 8HM73-3 8SX26-H33

914CE1-6G PL-100 11SM1077-H4 11SM1077-H58 11SM1-TN107 11SM405 11SM8423-H2 11SX37-T 11SX48-H58 11SM2442-T

11SM76-T 11SM77-H58 11SM77-T 11SM863-T 11SM866 A7CN-1M-1-LEFT A831700C7.0 121EN188-R 1245.0120