## **DIGITAST**

## Microminiature SPDT, Key Switches

#### Features/Benefits

- High reliability/long life
- Designed for low level switching
- Ready to implement on PCB
- Latching function available
- Several button options
- RoHS compliant and compatible

#### **Typical Applications**

- Medical
- Instrumentation
- Industrial electronics
- Audio electronics



#### Construction

FUNCTION: momentary or push-push

CONTACT ARRANGEMENT: 1 change over contact SPDT, NO

MODE OF SWITCHING: Non-shorting **DISTANCE BETWEEN BUTTON CENTERS:** 

HORIZONTAL MINIMUM: 12,7 (0.500) or 17,78 (0.700)

VERTICAL MINIMUM: 17,78 (0.700)

TERMINALS: PC pins

MOUNTING: Soldering, centering pins

#### Mechanical

TOTAL TRAVEL: ≤ 3 (.0018) SWITCHING TRAVEL: 1,5 (0.0591) LATCHING TRAVEL: 1,8 (0.0709)

OPERATING FORCE: 1.5 +/- 0.5 N (150 +/- 50 grams)

#### **Electrical**

SWITCHING POWER MAX.: 240 mW DC SWITCHING VOLTAGE MAX.: 24 V DC SWITCHING CURRENT MAX.: 10 mA DC

CARRYING CURRENT AT 20°C (push-push version): 100 mA

DIELECTRIC STRENGTH (50 Hz, 1 min): 500 V OPERATING LIFE with or without max. switching power

Momentary:  $\geq 5 \times 10^6$  operations Push-push: ≥ 5 x 10<sup>5</sup> operations CONTACT RESISTANCE: Initial  $\leq 50 \text{ m}\Omega$ After 5 x  $10^6$  operations:  $\leq 100 \text{ m}\Omega$ INSULATION RESISTANCE: ≥ 10<sup>10</sup> Ω CAPACITANCE at f= 10 kHz: ≤ 0.8pF

BOUNCE TIME: ≤ 2.5 ms

Operating speed 400 mm/s (15.75/s)

#### **Process**

SOLDERABILITY:

Wave soldering, compatible with lead free soldering profile Hand soldering, 350°C for 3 seconds


#### **Environmental**


OPERATING TEMPERATURE: -25°C to 85°C.

#### **How To Order**

Our easy build-a-switch concept allows you to mix and match options to create the switch you need. To order, select desired option from each category and place it in the appropriate box. Some of the configurations may not be available or could require some development.



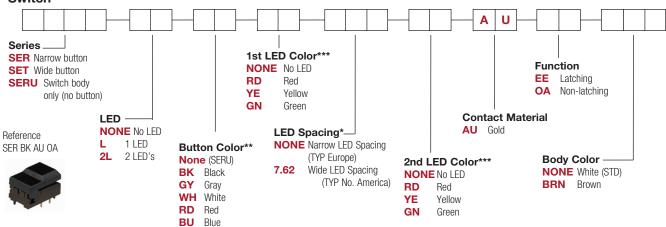

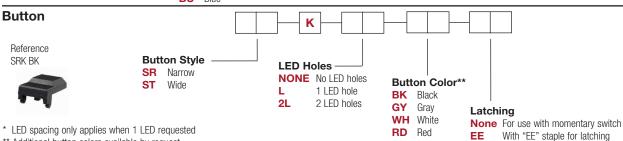



\*\* Additional button colors available by request

<sup>\*\*\*</sup> Additional LED colors available by request including Bi color configurations



Dimensions are shown: mm Specifications and dimensions subject to change


BU Blue


## Microminiature SPDT, Key Switches

#### 

#### **SER** NARROW BUTTON






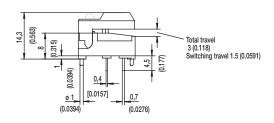









#### **SET** WIDE BUTTON

















#### **SERU** NO BUTTON




Key Switches















# DIGITAST Microminiature SPDT, Key Switches

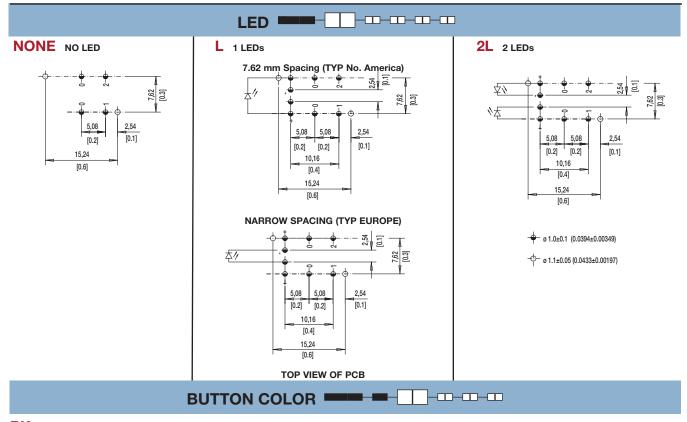

**BK** BLACK

**GY** GRAY

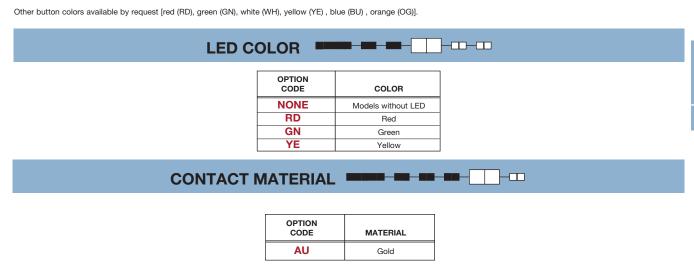

	TION ODE	COLOR	SCHEMATIC
C	)A	Momentary	
E	E	Push-Push	



Dimensions are shown: mm Specifications and dimensions subject to change

First Angle Projection

### **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Switch Bezels / Switch Caps category:

Click to view products by C&K manufacturer:

Other Similar products are found below:

896809000 LW1A-B2-R LW2A-B1-G 704.604.4 704.955.3 F1403 7527 760203000 760503000 766601000 785105000 785106000

79211759 MG12KB MH11 MH13 MHU31 MJ1216 MJ1226 MJ33 MJ612 MJ626 MJ627 9001T8BK 908-1634 92-343.200 92-343.400

95804.920 95CAP-011 95CAP-112 11-932.7 99-901.9 99-902.9 99-909.4 99-909.5 99-920.8 A0261A 11-931.2 11-932.5 11-936

AKTSC22B AT496H AW-RF8 161006 1825068-6 184-1872 187-1872 188-1471 18-920.1 C1103