





### Features/Benefits

- Long & adequate stroke setting for high reliability & insulation
- Silent actuation for reduced audible click
- Compact size ideal when space is limited
- Twin contacts design sliding contacts prevent pollution of foreign materials
- IP67 for standalone switch except the metal terminal part; Full IP67 protection when potted with wire version
- RoHS compatible & compliant

#### **Typical Applications**

- Industrial
- Home appliances
- Automotive: door latch, seat position detection, EV charging

#### **Specifications**

CONTACT RATING: 100mA 30VDC @ 300,000 cycles min.

50mA 16VDC @ 500,000 cycles min. 1mA 5VDC @ 500,000 cycles min.

MECHANICAL LIFE: 500,000 cycles min. INSULATION RESISTANCE: 100 M ohm min.

DIELECTRIC STRENGTH: Min. 600VAC (50-60Hz)/minute

between Live Parts

OPERATING TEMPERATURE: -40°C to 85°C

OPERATING FORCE: 150 gf max.

#### **Materials**

CASE: Nylon COVER: PBT

**ACTUATOR BUTTON: POM** 

MOVABLE CONTACTS: Silver alloy or gold plated STATIONARY CONTACTS: Silver alloy or gold plated

TERMINALS: Brass, silver plated.


NOTE: Specifications and materials listed above are for switches with standard options.

For information on specific and custom switches, consult Customer Service Center.

Sealing cap could possibly be damaged in case of contacts with oils or greases. Please try to avoid direct contact. If more support is needed, consult Customer Service Centre

#### **Build-A-Switch**

Our easy build-a-switch concept allows you to mix and mtach options to create the switch you need. To order, select desired option from each category and place it in ht eappropriate box.

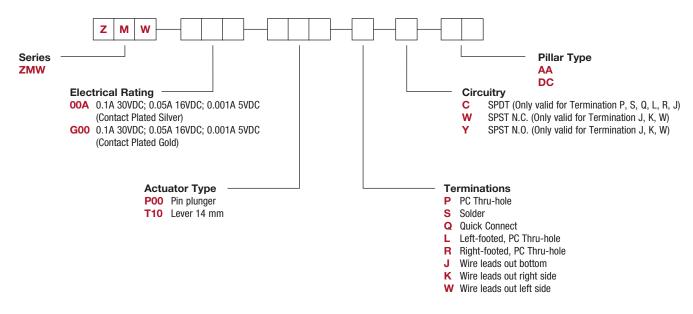





## NEW


## **SERIES**

### **ZMW** MINI SIZE SNAP-ACTING SWITCHES

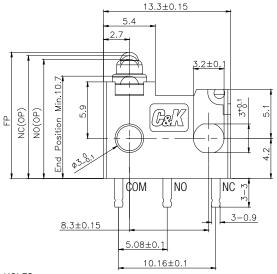




#### MOUNTING HOLES




## **ACTUATOR TYPE**


#### P00 PIN PLUNGER
















## **TERMINATIONS**


P PC THRU-HOLE







S SOLDER







Q QUICK CONNECT






L LEFT-FOOTED, PC THRU-HOLE







RIGHT-FOOTED, PC THRU-HOLE


Snap-acting C







J WIRE LEADS OUT BUTTOM







K WIRE LEADS OUT RIGHT SIDE





W WIRE LEADS OUT LEFT SIDE





COM: AVSS 0.3 MM<sup>2</sup> BLACK OR EQUIVALENT NO: AVSS 0.3 MM<sup>2</sup> BLUE OR EQUIVALENT NC: AVSS 0.3 MM<sup>2</sup> GRAY OR EQUIVALENT

Dimensions are shown: mm Specifications and dimensions subject to change




# NEW

#### **SWITCH CHARACTERISTICS**


SWITCH TYPE	PART SUFFIX	OF Max (gf)		FP Max ( mm )	NC-OP ( mm )	NO-OP ( mm )	NC-OT Min.( mm )	NO-OT Min. ( mm )
ZMWXXXP00XXXX	Datum from Bottom	S	153	13.4	12.9±0.3	12.6±0.3	2.5	2.2
	Datum from Centre			9.2	8.7±0.3	8.4±0.3		
ZMWXXXT10XXXX	Datum from Bottom	S	185	15.7	14.0±0.6	13.45±0.6	3.0	2.45
	Datum from Centre			11.5	9.8±0.6	9.25±0.6		

## PILLAR TYPE

DC



AA





Dimensions are shown: mm Specifications and dimensions subject to change



## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Basic / Snap Action Switches category:

Click to view products by C&K manufacturer:

Other Similar products are found below:

5SM901-S12 5SM9-S12N195 602EN532 602EN535-RB 602HE5-RB1 604HE162 604HE223-6B 624HE17-RB 6HM82 6HM89 6SE1 6SX1-H58 70500216 70599106 MBD5B1 MBH2731 73-316-0012 EXD-AR20 79211923 79218589 7AS12 MIL30126AB6BBMD4A12XAU ML-1155 ML-1376 831010C3.0 831090C2.EL 83131904 84212012 8AS239 8HM73-3 8SX26-H33 914CE1-6G PL-100 11SM1077-H4 11SM1077-H58 11SM1-TN107 11SM405 11SM8423-H2 11SX37-T 11SX48-H58 11SM2442-T 11SM76-T 11SM77-H58 11SM77-T 11SM863-T 11SM866 A7CN-1M-1-LEFT A831700C7.0 121EN188-R 1245.0120