

3,5mm Klinken-Kabel für MP3-Player, iPods und Smartphones

Das 3,5 mm Klinken-Kabel stellt die praktischste Möglichkeit zum Anschluss portabler Audio-Geräte an eine HiFi-Anlage, mobile Lautsprecher oder das Autoradio dar. Dank mehrfacher Signalschirmung, reiner Materialien und präziser Verarbeitung ist die 3,5 mm Audioverbindung im Handumdrehen hergestellt.

- **3,5 mm Klinken-Stecker zur Verbindung von portablen Audio-Geräten via AUX-In**
- **reine Kupferleiter und 2-fach Schirmung für klare Signalqualität**
- **24-Karat vergoldete Kontakte für minimale Übertragungswiderstände**

Technische Daten


| Anschlüsse | |
|------------------------------------|--|
| Steckermaterial: | 3-fach umspritztes PVC / ABS |
| Kontaktmaterial: | 24-Karat-vergoldet |
| Schirmung: | ja |
| Anschluss 1, Typ: | 3,5 mm KLINKEN-Stecker |
| Anschluss 1, Steckerlänge (mm): | 30,3 |
| Anschluss 1, Steckerbreite (mm): | 9,8 |
| Anschluss 1, Steckerhöhe (mm): | 8,0 |
| Anschluss 2, Typ: | 3,5 mm KLINKEN-Stecker |
| Anschluss 2, Steckerlänge (mm): | 30,3 |
| Anschluss 2, Steckerbreite (mm): | 9,8 |
| Anschluss 2, Steckerhöhe (mm): | 8,0 |
| Kabel | |
| Typ: | Rundkabel |
| Länge (m): | 1 1,5 3 5 10 |
| Material Innenleiter: | OFC (sauerstofffreies Kupfer) |
| Durchmesser Innenleiter (mm): | 25 x 0,120 |
| AWG: | 23 |
| Anzahl Schirmungen: | 2 x |
| Typ 1. Schirmung: | Aluminium-Folie |
| Typ 2. Schirmung: | Kupfer-Geflecht 42 Adern x 0,12 mm Querschnitt |
| Material Außenmantel: | hochelastisches PVC |
| Durchmesser Außenmantel (mm): | 3,9 |
| Knickschutz: | beidseitig |
| Signalübertragung | |
| Übertragungsarten: | analoge Audiosignale |
| max. Bandbreite (MHz): | 10,0 |
| Kapazität (pF): | 155 |
| Wellenwiderstand (Ω): | 50 |
| Allgemein | |
| Betriebstemperatur von / bis (°C): | -10 / +80 |
| Garantie (Jahre): | 10 |

casual




 3,5 mm KLINKEN-Stecker

 3,5 mm KLINKEN-Stecker



Kabelquerschnitt

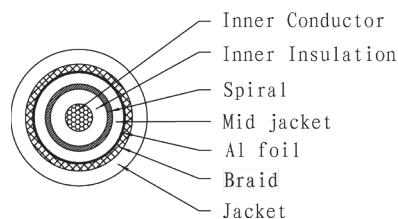

Schaltplan



| Artikelnr. | Kabellängen (m) | Verpackung (Maße in mm) | Gewicht (kg) | Abbildung | EAN Code |
|------------|-----------------|---|--|---|--|
| 70476 | 1.00 | Einzelkarton: 185 x 80 x 25 Export VPE (40 Stk.): 400 x 295 x 235 | Einzelkarton: 0.06 Export VPE: 3.60 |  |  4 040849 704765 |
| 70477 | 1.50 | Einzelkarton: 185 x 80 x 25 Export VPE (40 Stk.): 400 x 295 x 235 | Einzelkarton: 0.07 Export VPE: 4.00 |  |  4 040849 704772 |
| 70479 | 3.00 | Einzelkarton: 185 x 80 x 25 Export VPE (40 Stk.): 400 x 295 x 235 | Einzelkarton: 0.10 Export VPE: 5.20 |  |  4 040849 704796 |
| 70480 | 5.00 | Einzelkarton: 185 x 180 x 40 Export VPE (30 Stk.): 425 x 270 x 235 | Einzelkarton: 0.14 Export VPE: 5.20 |  |  4 040849 704802 |
| 70482 | 10.0 | Einzelkarton: 185 x 180 x 40 Export VPE (24 Stk.): 400 x 285 x 435 | Einzelkarton: 0.29 Export VPE: 8.30 |  |  4 040849 704826 |

TARIC-Code: 85444290900

Bei Clicktronic® werden alle Kabel oberhalb einer Länge von 7,5 Metern gemäß der Testkriterien als Standard HDMI™-Kabel bezeichnet, auch wenn sie ursprünglich als High Speed HDMI™-Kabel ausgelegt wurden und ggf. auch über größere Distanzen eine deutliche Mehrleistung zeigen.

Alle enthaltenen Firmennamen und Produktbezeichnungen sind Warenzeichen der jeweiligen Inhaber. Alle Rechte vorbehalten. Bei HDMI™ handelt es sich um eine eingetragene Marke der HDMI Licensing L.L.C.

Der Inhalt kann von den Abbildungen abweichen. Druckfehler und Änderungen an Produkt, Verpackung oder Dokumentation behalten wir uns vor.
Clicktronic®, Pillmannstraße 12, D-38112 Braunschweig

MP3 audio cable

3.5 mm jack cable for MP3 Player, iPod, and Smartphone

The 3.5 mm jack cable provides a convenient option to connect portable audio devices to a HiFi system, mobile speakers, or the car radio. Due to multiple signal shielding, pure materials, and precise workmanship the 3.5 mm audio connection is established in an instant.

- 3.5 mm jack plug to connect portable audio devices via AUX-In
- pure copper conductor and 2-way shielding for clear signal quality
- 24-Karat gold plated contacts for minimum transfer resistances

Specifications

Connections

| | |
|-------------------------------------|-------------------------|
| Plug material: | triple-coated PVC / ABS |
| Contact material: | 24-Karat gold plated |
| Shielding: | yes |
| Port 1, type: | 3.5 mm STEREO plug |
| Connector 1, connector length (mm): | 30.3 |
| Connector 1, connector width (mm): | 9.8 |
| Connector 1, connector height (mm): | 8.0 |
| Port 2, type: | 3.5 mm STEREO plug |
| Connector 2, connector length (mm): | 30.3 |
| Connector 2, connector width (mm): | 9.8 |
| Connector 2, connector height (mm): | 8.0 |

cable

| | |
|--------------------------------|---|
| Type: | Round cable |
| Length (m): | 1 1.5 3 5 10 |
| Inner conductor material: | OFC (Oxygen free copper) |
| Inner conductor diameter (mm): | 25 x 0.120 |
| AWG: | 23 |
| Number of shieldings: | 2 x |
| Type of 1st shielding | Aluminium foil |
| Type of 2nd shielding | Copper braid 42 wires x 0.12 mm cross section |
| Outer sheath material: | highly elastic PVC |
| Outer sheath diameter (mm): | 3.9 |
| Kink protection: | on both sides |

Signal transmission

| | |
|-------------------------------|----------------------|
| Transmission modes: | analog audio signals |
| max. Bandwidth (MHz): | 10.0 |
| Capacitance (pF): | 155 |
| Characteristic impedance (Ω): | 50 |

General

| | |
|---------------------------------------|-----------|
| Operating temperature from / to (°C): | -10 / +80 |
| Warranty (years): | 10 |

clicktronic[®]
entertainment.
pure.

casual




3.5 mm STEREO plug


3.5 mm STEREO plug



Cross section

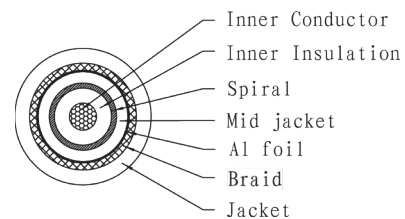



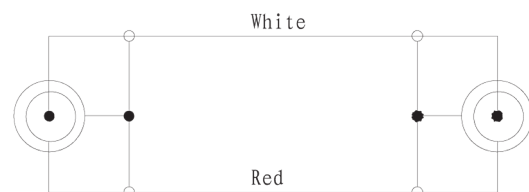


Wiring diagram



MP3 audio cable

3.5 mm jack cable for MP3 Player, iPod, and Smartphone

| Article no. | Cable lengths (m) | Packaging dimensions (mm) | Weight (kg) | Figure | EAN Code |
|-------------|-------------------|---|--|---|-----------------|
| 70476 | 1.00 | Single carton: 185 x 80 x 25 Master carton (40 pcs.): 400 x 295 x 235 | Single carton: 0.06 Master carton: 3.60 |  | 4 040849 704765 |
| 70477 | 1.50 | Single carton: 185 x 80 x 25 Master carton (40 pcs.): 400 x 295 x 235 | Single carton: 0.07 Master carton: 4.00 |  | 4 040849 704772 |
| 70479 | 3.00 | Single carton: 185 x 80 x 25 Master carton (40 pcs.): 400 x 295 x 235 | Single carton: 0.10 Master carton: 5.20 |  | 4 040849 704796 |
| 70480 | 5.00 | Single carton: 185 x 180 x 40 Export VPE (30 pcs.): 425 x 270 x 235 | Single carton: 0.14 Master carton: 5.20 |  | 4 040849 704802 |
| 70482 | 10.0 | Single carton: 185 x 180 x 40 Master carton (24 pcs.): 400 x 285 x 435 | Single carton: 0.29 Master carton: 8.30 |  | 4 040849 704826 |

TARIC Code: 85444290900

At Clicktronic® cables are designated as standard HDMI™ cables above a length of 7.5 meters, according to the test criteria, even if they originally are designed as High Speed HDMI™ cables and mostly show a significant power increase over long distances.

All company and product names are trademarks of their respective owners. All rights reserved. HDMI™ is a registered trademark of HDMI Licensing L.L.C.

The content may differ from those shown. We reserve the right for printing errors and changes to product packaging or documentation. Clicktronic®, Pöhlmannstraße 12, D-38112 Braunschweig/Germany

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Audio Cables](#) / [Video Cables](#) / [RCA Cables](#) category:

Click to view products by [Clicktronic](#) manufacturer:

Other Similar products are found below :

[59384500100E](#) [73-6310-10](#) [73-6311-10](#) [73-6313-3](#) [73-6313-6](#) [PCX-60-50](#) [RCA10RCA](#) [1-3737-600-3216](#) [15AK25X](#) [25FK25](#) [LF3BLX](#) [30-1511-10](#) [30AR30](#) [30AK30](#) [30AN30](#) [RCA05RCA](#) [RCA05RCAB](#) [RCA05TS](#) [RCA10RCAB](#) [420001400-3](#) [426058900-3](#) [TT6RX](#) [TT7BKX](#) [TT93602](#) [426058300-3](#) [LF1BKX](#) [LF3RX](#) [0887418300](#) [73-6312-6](#) [73-6314-3](#) [73-6352-3](#) [VMP3YX](#) [VMP2YX](#) [68767-0003](#) [TT746](#) [TT744](#) [CN13B](#) [LF4GNX](#) [LF2GYX](#) [426494200-3](#) [LF1RX](#) [VMPBNCF](#) [LF10GNX](#) [427492100-3](#) [LF4BLX](#) [TT747N2](#) [TT864](#) [LF2YX](#) [426491500-3](#) [426523700-3](#)