


UNIT:mm

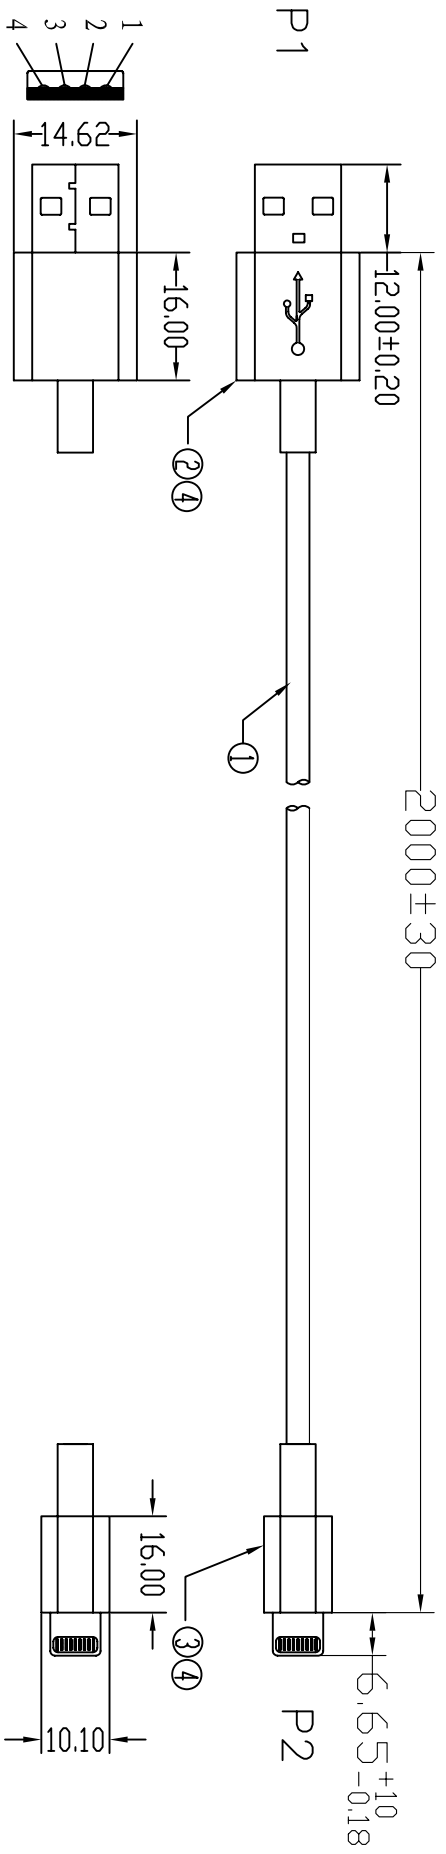

Technical requirements:

- 1 electrical testing requirements: 100% through 15 mobile phone test, data synchronization normal
- USB DC300V 20MΩ 0.1S no open circuit, short circuit, high pressure and other adverse
- 2 appearance: shell scratch, line no stains, forming without deformation, shrinkage, variegated, flash and other undesirable

④	TUBE	1	BLACK TUBE, OD6.0mm, L=18mm, 125°C 600V	DRAWN	Andy	DRAWING NO	CUSTOMER	CNC
	COPPER FOIL	1	W=5*l=15mm, DOUBLE-SIDE COPPER FOIL					
③	IN MOLD	3.7g	APPLE GRAY 45P TPE (MOLD NO:OPS-005)	CHECKED		ITEM NO.	104-1030-WH-00200	DATE
	OVER MOLD	1g	IP-5 MATERIAL: PC APPLE WHITE, PIANT GRAYA USB LOGO(THE NEW MOLD EXTENDED) WHITE PROTECTIVE FILM					
②	SNAP-FIT	1g	IP-5 SNAP-FIT MATERIAL: PC APPLE WHITE	APPROVAL		DATE	2014-10-27	VERSIONS/EDITION
	SHIELD CASE	1	C48 SHIELD CASE UP COVER, MATERIAL: COPPER NICKEL ZINC ALLOY, THICKNESS 0.3mm, WHITE"OPSO" LOGO					
①	I5 CONNECTOR	1	C48 THE ORIGINAL CONNECTOR	DECIDED		PROJECTION		A/0
	IN MOLD	4.5g	APPLE GRAY 45P TPE (MOLD NO:OPS-005)					
①	OVER MOLD	1g	IP-5 MATERIAL: PC APPLE WHITE, PIANT GRAYA USB LOGO(15 SURFACE) WHITE PROTECTIVE FILM	<p style="text-align: center;"><b>Cnc Tech, LLC</b> Industrial Cable and Connector Technology</p>				
	CONNECTOR	1	USB A MALE SHORT BODY SOLID TYPE, WITH A TIN COP PEARL NICKEL PLATED FINE BANDING LINE, WHITE INSULATION RATED TEMPERATURE 250-270, PIN G/F, BETWEEN 4P WHITE SHELL, IS SHORT, iPhone DEDICATED					
①	CALBE	1	3C+3D+1500D Huang Dansi+144 BRAID+AL 0D2.6mm, TPE APPLE WHITE DULL PLLISH JACKET					
NO.		SPECIFICATION						

4

3

2

1

A

B

C

D

A

B

C

D

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [cnc manufacturer](#):*

Other Similar products are found below :

[741-20010-00500](#) [DL-5468](#) [2725-2828-01000-T](#) [300-30-40-GR-0250F](#) [743-60012-00300](#) [302-28-50-GR-0250F](#) [302-28-10-GR-0100F](#)  
[3020-10-0300-00-TR](#) [FM-213-4](#) [FM-214-4](#) [302-28-26-GR-0250F](#) [302-28-40-GR-0250F](#) [304-28-26-MC-0250F](#) [304-28-40-MC-0250F](#)  
[302-28-09-GR-0250F](#) [1002-003-02000](#) [302-28-37-GR-0250F](#) [302-28-25-GR-0250F](#) [3020-10-0300-00](#) [300-30-14-GR-0250F](#) [302-28-14-GR-](#)  
[0250F](#) [300-30-04-GR-0250F](#) [300-30-26-GR-0250F](#) [304-28-16-MC-0250F](#) [304-28-26-MC-0100F](#) [302-28-10-GR-0250F](#) [800-1401-2-SJT0-](#)  
[BL-00200](#) [300-30-20-GR-0250F](#) [304-28-14-MC-0250F](#) [800-1800-2-SVT0-BL-00100](#) [741-20010-01000](#) [CNC-99-16](#) [302-28-20-GR-0100F](#)  
[302-28-26-GR-0100F](#) [304-28-40-MC-0100F](#) [600218](#) [510-26-6600-WH-0007F](#) [610230](#) [3010-10-003-13-00](#) [304-28-14-MC-0100F](#) [302-28-50-](#)  
[GR-0100F](#) [3030-16-0102-00](#) [3221-10-0300-00](#) [304-28-16-MC-0100F](#) [610234](#) [302-28-37-GR-0100F](#) [800-12-32D-BL-0008F](#) [FM-215-8](#) [DL-](#)  
[1006](#) [304-28-20-MC-0250F](#)