


RECOMMENDED P.C BOARD LAYOUT

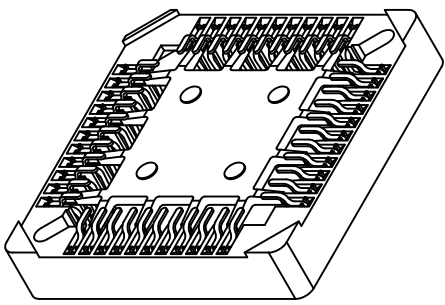


NOTES:  
 SPECIFICATIONS:  
 CURRENT RATING:1 AMP.  
 VOLTAGE:250V AC/DC MAX.  
 DIELECTRIC WITHSTANDING:500VAC FOR ONE MINUTE.  
 CONTACT RESISTANCE:50mΩ (MAX).  
 INSULATION RESISTANCE:1000MΩ (MIN).  
 OPERATING TEMPERATURE:-55°C +105°C.  
 RETENTION FORCE:0.30KG PER PIN (MIN).  
 MATERIALS:  
 INSULATOR: PPS +30%GF UL 94V-0.  
 CONTACTS:PHOSOR BRONZE.  
 CONTACT PLATING TIN.

Dimension No. Of Pin	A	B	C	D	E	F	G	H
SMT-20P	15.65	15.65	5.08	5.08	9.35	9.35	10.03	10.03
SMT-28P	18.19	18.19	7.62	7.62	11.89	11.89	12.57	12.57
SMT-32P	20.65	18.15	10.16	7.62	14.35	11.85	13.56	12.80
SMT-44P	23.27	23.27	12.70	12.70	16.97	16.97	17.65	17.65
SMT-52P	25.81	25.81	15.24	15.24	19.51	19.51	20.19	20.19
SMT-68P	30.89	30.89	20.32	20.32	24.59	24.59	25.27	25.27
SMT-84P	35.97	35.97	25.40	25.40	29.67	29.67	30.35	30.35

DATE	DR.BY	EQN.NO.	DESCRIPTION	MARK	VER.
10/09/06	ING		NEW DWG		A0

-TOLERANCES-  
 UNLESS OTHERWISE SPECIFIED

公差参考表



Cnc Tech,LLC

TITLE: PLCC 0.20 SMT 成品

X.X	±0.30	X.X°	±3.00°	APPD:	PRODUCT NO:	232-XX
X.XX	±0.20	X.XX°	±1.00°	CHECK:	DATE	SCALE
X.XXX	±0.10	X.XXX°	±0.05°	DRAW:	2010.09.06	1:1
						UNIT
						mm
						TYPE
						Z
						PAGE
						1/1

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [cnc manufacturer](#):*

Other Similar products are found below :

[741-20010-00500](#) [DL-5468](#) [2725-2828-01000-T](#) [300-30-40-GR-0250F](#) [743-60012-00300](#) [302-28-50-GR-0250F](#) [302-28-10-GR-0100F](#)  
[3020-10-0300-00-TR](#) [FM-213-4](#) [FM-214-4](#) [302-28-26-GR-0250F](#) [302-28-40-GR-0250F](#) [304-28-26-MC-0250F](#) [304-28-40-MC-0250F](#)  
[302-28-09-GR-0250F](#) [1002-003-02000](#) [302-28-37-GR-0250F](#) [302-28-25-GR-0250F](#) [3020-10-0300-00](#) [300-30-14-GR-0250F](#) [302-28-14-GR-](#)  
[0250F](#) [300-30-04-GR-0250F](#) [300-30-26-GR-0250F](#) [304-28-16-MC-0250F](#) [304-28-26-MC-0100F](#) [302-28-10-GR-0250F](#) [800-1401-2-SJT0-](#)  
[BL-00200](#) [300-30-20-GR-0250F](#) [304-28-14-MC-0250F](#) [800-1800-2-SVT0-BL-00100](#) [741-20010-01000](#) [CNC-99-16](#) [302-28-20-GR-0100F](#)  
[302-28-26-GR-0100F](#) [304-28-40-MC-0100F](#) [600218](#) [510-26-6600-WH-0007F](#) [610230](#) [3010-10-003-13-00](#) [304-28-14-MC-0100F](#) [302-28-50-](#)  
[GR-0100F](#) [3030-16-0102-00](#) [3221-10-0300-00](#) [304-28-16-MC-0100F](#) [610234](#) [302-28-37-GR-0100F](#) [800-12-32D-BL-0008F](#) [FM-215-8](#) [DL-](#)  
[1006](#) [304-28-20-MC-0250F](#)