
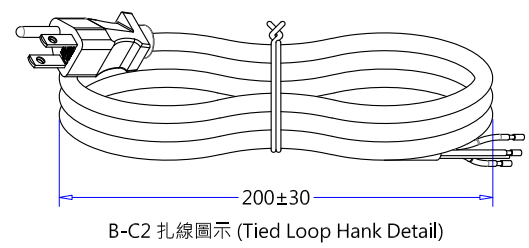
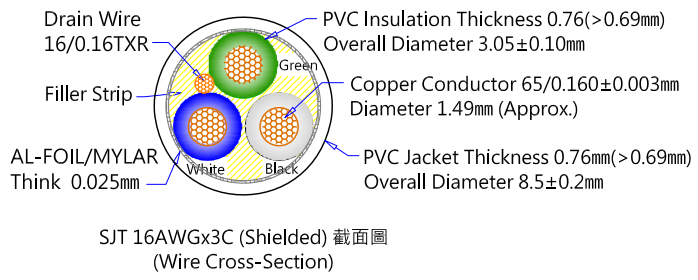



插頭部件 (Plug Component)			頭部剝皮尺寸 (Dimensions)			線材規格 (Wire Styls)	尾部剝皮尺寸 (Dimensions)			端子規格 (Termianl Style)	
顏色(Color)	零件描述(Component)	Qty.	內剝(Strip)	外剝(ROJ)	顏色(Color)	SJT 16AWGx3C (Shielded, A+E) 105°C 黑色 (Black) Length : 2000±50 (78.7"±2")	外剝(ROJ)	內剝(Strip)	顏色(Color)	規格描述(Instruction)	端子編號(Style No.)
35P 黑色 (Black)	ME-301 (NEMA 5-15P)	1	6 ⁺¹ ₋₀	22 ± 2	黑/Black(L)		50.8±5	6.35±3	黑/Black(L)	絕緣依尺寸剝除，留膠於線上(半剝) (Strip and Retain outside Insulated)	
鍍鎳 (Nickel-Plated)	Ø4.75 圓管端子 (Earth Pins Terminal)	1	6 ⁺¹ ₋₀	22 ± 2	白/White(N)		50.8±5	6.35±3	白/White(N)	絕緣依尺寸剝除，留膠於線上(半剝) (Strip and Retain outside Insulated)	
鍍鎳 (Nickel-Plated)	6.3*1.5 單片圓頭端子 (Solid Blades)	2	6 ⁺¹ ₋₀	22 ± 2	綠/Green(E)		50.8±5	6.35±3	綠/Green(E)	絕緣依尺寸剝除，留膠於線上(半剝) (Strip and Retain outside Insulated)	
黑色 (Black)	301-1 兩件式內模 (301-1 Inner Body)	1									

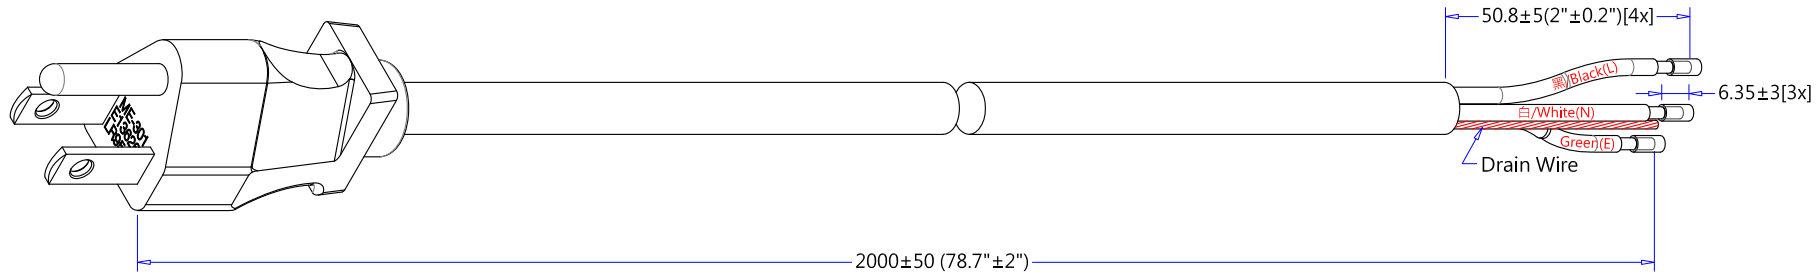

REV	DATE	REVISE CONTENT
A	09/25-2012	The first edition is issued and drawing.
F		

NOTE:

- Hi-Pot Test : 1500V/1Sec ; <0.5mA.
- Insulation Resistance Test : DC 500/min>100 meg-ohm.
- Continuity & Polarization Test : No short circuit, break circuit, displacement.
- Each end terminal shall be capable of withstanding a pull of 25lbs for 1 minutes without loosening.
- Strain relief shall be capable of withstanding a pull of 35lbs for 1 minutes without loosening.
- All material according to Non-toxic standard.(Material must be RoHS compliant.)

線材印字 (Wire Printed)	充麻, 油墨印字 (Fillers, Printing Ink)			CnC Tech, LLC Industrial Cable and Connector Technology			
包裝方式 (Packing)		DRAWN					
Tied Hank	See Hank Detail	Chu8.		P/N No.		800-1601-2-SJT0-BL-00200	
Carton Size	480 x 320 x 230	DATE		MATERIAL		UNIT	
Pack Number	75 pcs/ UL Laster Labels	09/25-2012		PVC		mm	
Carton Print	See Purchase Order	TYPE		Customer Approval			
		NEMA 5-15P to ROJ(S&R) Shielded Power Supply Cord					
DRAWING NO.	098MM1043	REV	A				

業務校園： 品質校園：

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [cnc manufacturer](#):

Other Similar products are found below :

[741-20010-00500](#) [DL-5468](#) [2725-2828-01000-T](#) [300-30-40-GR-0250F](#) [743-60012-00300](#) [302-28-50-GR-0250F](#) [302-28-10-GR-0100F](#)
[3020-10-0300-00-TR](#) [FM-213-4](#) [FM-214-4](#) [302-28-26-GR-0250F](#) [302-28-40-GR-0250F](#) [304-28-26-MC-0250F](#) [304-28-40-MC-0250F](#)
[302-28-09-GR-0250F](#) [1002-003-02000](#) [302-28-37-GR-0250F](#) [302-28-25-GR-0250F](#) [3020-10-0300-00](#) [300-30-14-GR-0250F](#) [302-28-14-GR-](#)
[0250F](#) [300-30-04-GR-0250F](#) [300-30-26-GR-0250F](#) [304-28-16-MC-0250F](#) [304-28-26-MC-0100F](#) [302-28-10-GR-0250F](#) [800-1401-2-SJT0-](#)
[BL-00200](#) [300-30-20-GR-0250F](#) [304-28-14-MC-0250F](#) [800-1800-2-SVT0-BL-00100](#) [741-20010-01000](#) [CNC-99-16](#) [302-28-20-GR-0100F](#)
[302-28-26-GR-0100F](#) [304-28-40-MC-0100F](#) [600218](#) [510-26-6600-WH-0007F](#) [610230](#) [3010-10-003-13-00](#) [304-28-14-MC-0100F](#) [302-28-50-](#)
[GR-0100F](#) [3030-16-0102-00](#) [3221-10-0300-00](#) [304-28-16-MC-0100F](#) [610234](#) [302-28-37-GR-0100F](#) [800-12-32D-BL-0008F](#) [FM-215-8](#) [DL-](#)
[1006](#) [304-28-20-MC-0250F](#)