
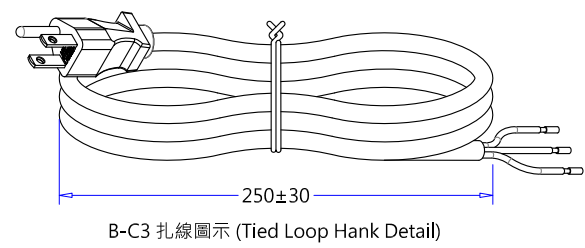
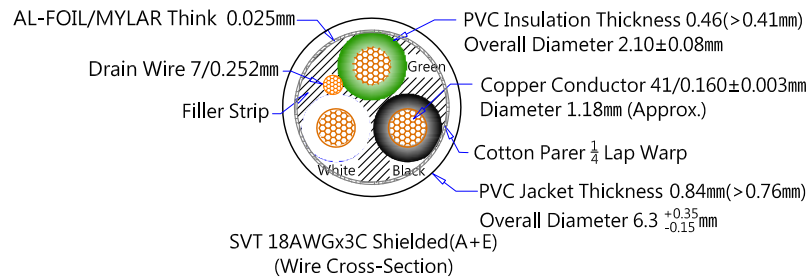



| 插頭部件 (Plug Component) | | | 頭部剝皮尺寸 (Dimensions) | | | 線材規格 (Wire Styls) | 尾部剝皮尺寸 (Dimensions) | | | 端子規格 (Termianl Style) | |
|-----------------------|----------------------------------|------|-------------------------------|---------|------------|--|---------------------|-----------|------------|---|-----------------|
| 顏色(Color) | 零件描述(Component) | Qty. | 內剝(Strip) | 外剝(ROJ) | 顏色(Color) | SVT 18AWGx3C (Shielded, A+E) | 外剝(ROJ) | 內剝(Strip) | 顏色(Color) | 規格描述(Instruction) | 端子編號(Style No.) |
| 35P 黑色 (Black) | ME-301 (NEMA 5-15P) | 1 | 6 ⁺¹ ₋₀ | 22 ± 2 | 黑/Black(L) | 105°C 黑色 (Black) Length : 3000±50 (118"±2") | 50.8±5 | 6.35±3 | 黑/Black(L) | 絕緣依尺寸剝除，留膠於線上(半剝) (Strip and Retain outside Insulated) | |
| 鍍鎳 (Nickel-Plated) | φ4.75 圓管端子 (Earth Pins Terminal) | 1 | 6 ⁺¹ ₋₀ | 22 ± 2 | 白/White(N) | | 50.8±5 | 6.35±3 | 白/White(N) | 絕緣依尺寸剝除，留膠於線上(半剝) (Strip and Retain outside Insulated) | |
| 鍍鎳 (Nickel-Plated) | 6.3*1.5 單片圓頭端子 (Solid Blades) | 2 | 6 ⁺¹ ₋₀ | 22 ± 2 | 綠/Green(E) | | 50.8±5 | 6.35±3 | 綠/Green(E) | 絕緣依尺寸剝除，留膠於線上(半剝) (Strip and Retain outside Insulated) | |
| 黑色 (Black) | 301-1 兩件式內模 (301-1 Inner Body) | 1 | | | | | | | | | |

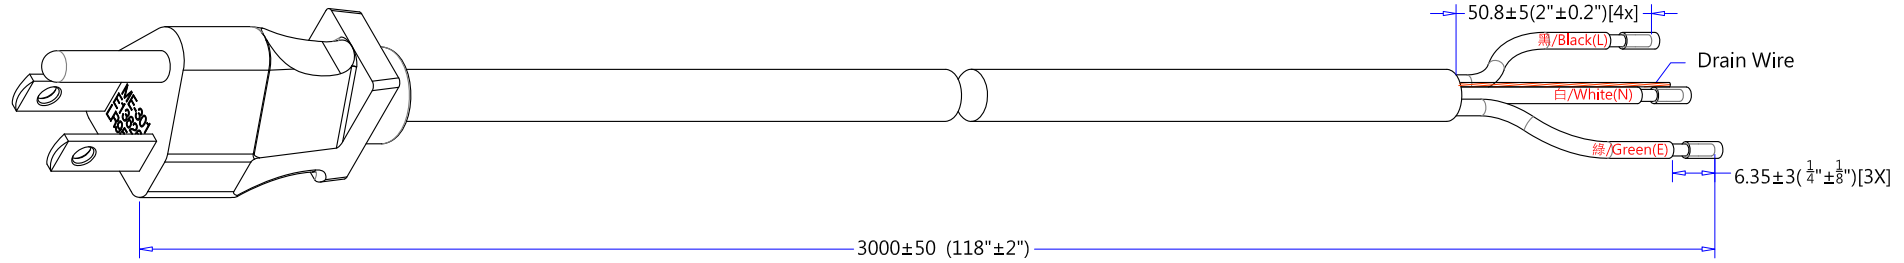

| REV | DATE | REVISE CONTENT |
|-----|------------|--|
| A | 08/30-2012 | The first edition is issued and drawing. |
| F | | |
| | | |

NOTE:

- Hi-Pot Test : 1500V/1Sec ; <0.5mA.
- Insulation Resistance Test : DC 500/min> 100 meg-ohm.
- Continuity & Polarization Test : No short circuit, break circuit, displacement.
- Each end terminal shall be capable of withstanding a pull of 25lbs for 1 minutes without loosening.
- Strain relief shall be capable of withstanding a pull of 35lbs for 1 minutes without loosening.
- All material according to Non-toxic standard.(Material must be RoHS compliant.)

| | | | | | | | |
|---------------------|----------------------------------|------------|---|---|--------------------------|------|----|
| 線材印字 (Wire Printed) | 充麻, 油墨印字 (Fillers, Printing Ink) | | | CnC Tech, LLC Industrial Cable and Connector Technology | | | |
| 包裝方式 (Packing) | | DRAWN | | | | | |
| Tied Hank | See Hank Detail | Chu8. | | | | | |
| Carton Size | 480 x 320 x 180 | DATE | | CUSTOMER | CnC | | |
| Pack Number | 50 pcs/ UL Laster Labels | 08/30-2012 | | P/N No. | 800-1801-2-SVT0-BL-00300 | | |
| Carton Print | See Purchase Order | TYPE | | MATERIAL | PVC | UNIT | mm |
| DRAWING NO. | 098MM1004 | REV | A | Customer Approval | | | |

業務校閱：
品質校閱：

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [cnc manufacturer](#):

Other Similar products are found below :

[741-20010-00500](#) [DL-5468](#) [2725-2828-01000-T](#) [300-30-40-GR-0250F](#) [743-60012-00300](#) [302-28-50-GR-0250F](#) [302-28-10-GR-0100F](#)
[3020-10-0300-00-TR](#) [FM-213-4](#) [FM-214-4](#) [302-28-26-GR-0250F](#) [302-28-40-GR-0250F](#) [304-28-26-MC-0250F](#) [304-28-40-MC-0250F](#)
[302-28-09-GR-0250F](#) [1002-003-02000](#) [302-28-37-GR-0250F](#) [302-28-25-GR-0250F](#) [3020-10-0300-00](#) [300-30-14-GR-0250F](#) [302-28-14-GR-](#)
[0250F](#) [300-30-04-GR-0250F](#) [300-30-26-GR-0250F](#) [304-28-16-MC-0250F](#) [304-28-26-MC-0100F](#) [302-28-10-GR-0250F](#) [800-1401-2-SJT0-](#)
[BL-00200](#) [300-30-20-GR-0250F](#) [304-28-14-MC-0250F](#) [800-1800-2-SVT0-BL-00100](#) [741-20010-01000](#) [CNC-99-16](#) [302-28-20-GR-0100F](#)
[302-28-26-GR-0100F](#) [304-28-40-MC-0100F](#) [600218](#) [510-26-6600-WH-0007F](#) [610230](#) [3010-10-003-13-00](#) [304-28-14-MC-0100F](#) [302-28-50-](#)
[GR-0100F](#) [3030-16-0102-00](#) [3221-10-0300-00](#) [304-28-16-MC-0100F](#) [610234](#) [302-28-37-GR-0100F](#) [800-12-32D-BL-0008F](#) [FM-215-8](#) [DL-](#)
[1006](#) [304-28-20-MC-0250F](#)