





- Family of 2-wire Common Mode Chokes
- Low profile surface mount package
- Range suited for many DSL and Telecom applications
- Operating Temperature: 0°C to +70°C
- Current rating : 420mA Max( $\Delta T \leq 40^\circ\text{C}$ )




PGT0402-04

Electrical Specification @25°C	
OCL:	PIN1-4 = PIN2-3 = 4.7mH +50%/-30% @10KHz/0.1V
Inductance imbalance	PIN1-2 = 0.6uH Max.(PIN3-4 Short) @100KHz/0.1V
Hi-POT :	500VAC
Turn Ratio:	1:1±3%
D.C.R:	PIN1-4 = PIN2-3 = 0.8ohm Max.

## Dimensions

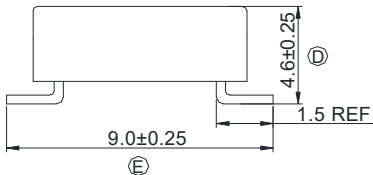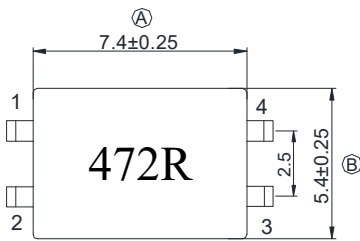

## Schematic

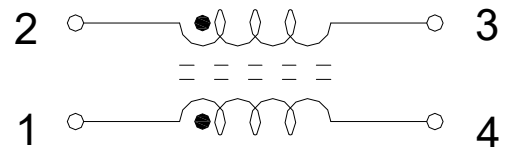

(Units: mm, Unless otherwise specified, all tolerances are ±0.25)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Common Mode Chokes / Filters](#) category:*

*Click to view products by [CND-tek](#) manufacturer:*

Other Similar products are found below :

[PE-64683](#) [RD5122-6-9M6](#) [RD6137-6-7M5](#) [RD8147-16-3M0](#) [ST6118T-R](#) [FE3X025-10-7NL](#) [RD7147-25-0M7](#) [TCM0806G-350-2P-T](#)  
[TCM0806G-650-2P-T](#) [IND-0110](#) [UAL21VR0802000](#) [UALSC023000000](#) [UALSC1020JH000](#) [UALSU10VD20010](#) [UALSU9VD070100](#) [36-00037](#) [UALW21HS072450](#) [UALSU9H0208000](#) [UAL24VK06450CH](#) [PLT10HH501100PNB](#) [PLT10HH401100PNB](#) [PLT10HH1026R0PNB](#)  
[36-00029-01](#) [PE-67531](#) [TLH10UB](#) [113 0R5](#) [2752045447](#) [7351V](#) [CMF16-153131](#) [RD7147-6-6M0](#) [T8116NLT](#) [FE2X10-4-2NL](#) [36-00029-07](#)  
[T8003NLT](#) [CTX01-13663](#) [CTX66-19521-R](#) [RC212-0.5-10M](#) [RC112-0.4-15M](#) [RC212-0.6-6M8](#) [RC212-0.4-15M](#) [RC112-0.3-30M](#)  
[WTCF2012Z0M751PB](#) [PH9408.814NLT](#) [PAC6006.364NLT](#) [PAC6006.444NLT](#) [PAC6006.204NLT](#) [PH9407.204NLT](#) [PAC6006.264NLT](#)  
[PH9408.494NLT](#) [PAC6006.104NLT](#) [CM6350R-683-REEL](#)