

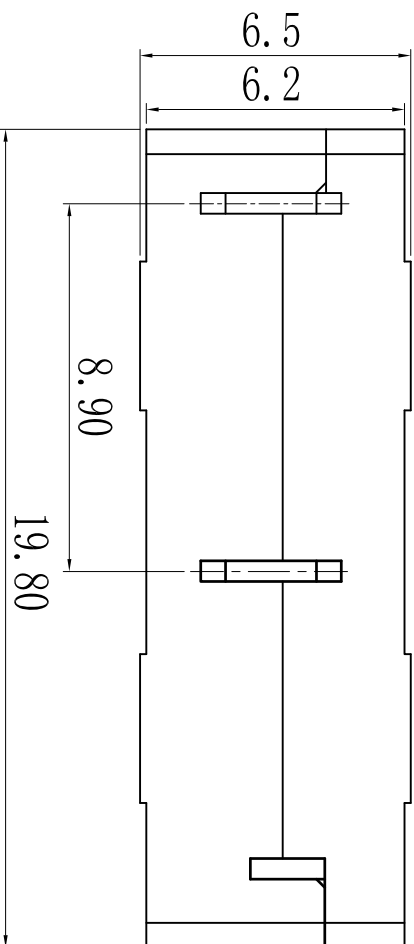
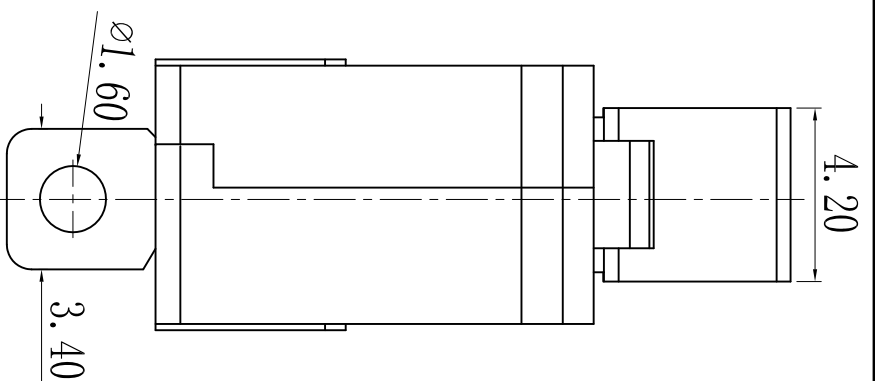


主要技术参数、性能  
The Main Technology Performance

项目 Item	参数 Parameter
电路图 Circuit	
额定电流、电压 Rated current/voltage	见标识图 Marking/Rating
绝缘电阻 Insulated resistance	$\geq 100M \Omega$
接触电阻 Contact resistance	$\leq 100m \Omega$
介电强度 Dielectric strength	工作绝缘: 500Vac/5mA/5s 基本绝缘: 1500Vac/5mA/5s
电气寿命 Endurance	见标识图 Marking/Rating
使用温度 Ambient temperature	见标识图 Marking/Rating
操作力 Operating force	$60 \pm 30g \cdot f$
行程 TRAVEL	FP=12.7 $\pm$ 0.8mm OP=1.0、2 $\pm$ 0.8mm

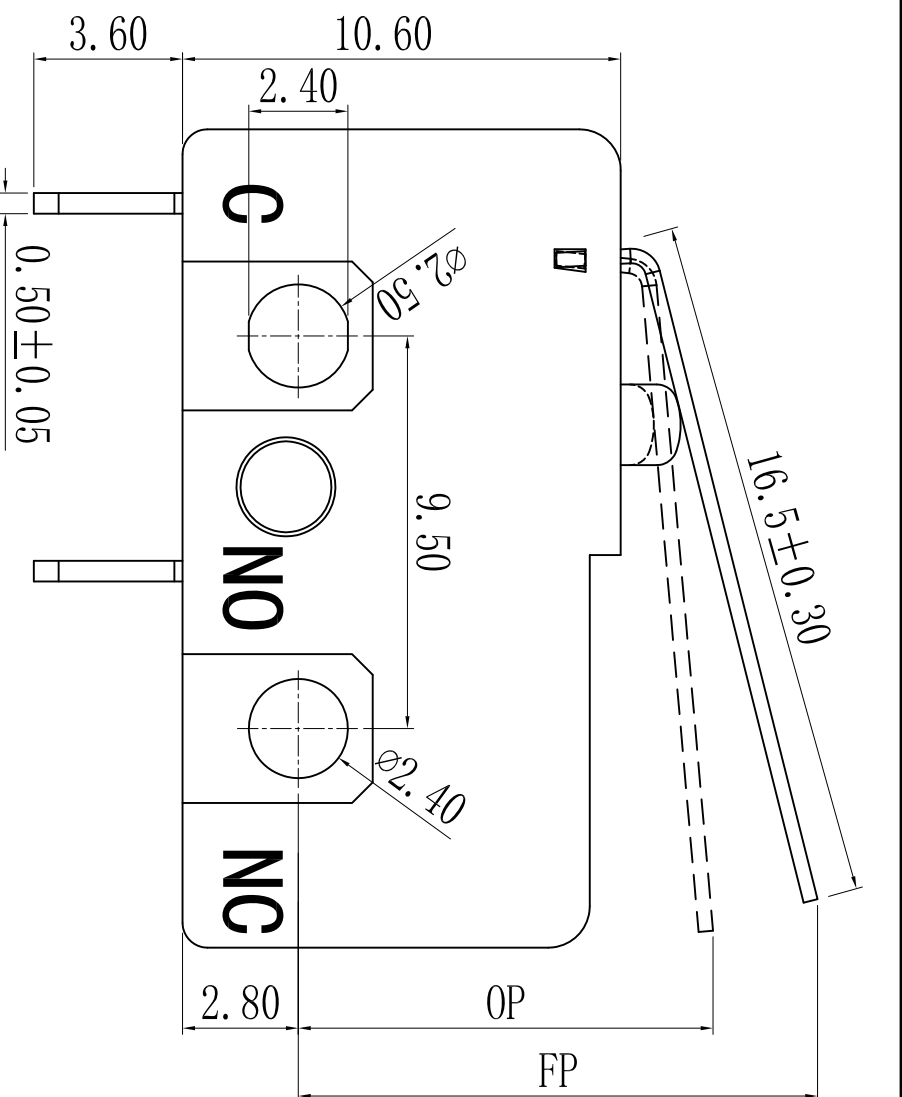

**CNIBAO** MAC-1210  $\mu$   
 3(3)A 250VAC 5E4 T125  
 8(3)A 250VAC T125  
 MAC-1210  $\mu$  25T125 5E4  
 10GPA 125/250VAC 8A 36VDC 1E5 **UL** <sup>®</sup> US  
 8(4)A 125/250VAC 1/2HP 125/250VAC



第三视图 THE THIRD ANGLE PROJECTION		比例 SCALE NONE		单位 UNIT mm		版本 VERSION A0	
MARK AMOUNT	数量	MODIFY FILE NO.	更改文件号	CHANGE BY	更改人	DATE	日期
设计 DESIGN							
审核 CHECK							
批准 APPROVAL							

**CNIBAO** 浙江亿宝  
ZHEJIANG YIBAO

微动开关  
MICRO SWITCH

DESIGNATION:  
MAC-1210-0-BDA12-11

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Basic / Snap Action Switches](#) category:*

*Click to view products by [CNIBAO](#) manufacturer:*

Other Similar products are found below :

[83228001](#) [01.098.1358.1](#) [602EN1-6B](#) [602EN532](#) [602EN535-RB](#) [602HE5-RB1](#) [604HE162](#) [604HE223-6B](#) [624HE17-RB](#) [6HM89](#) [6PA78-JM](#)  
[6SE1](#) [6SX1-H58](#) [70500840](#) [MBD5B1](#) [MBH2731](#) [73-316-0012](#) [79211759](#) [79211923](#) [79218589](#) [7AS12](#) [ML-1155](#) [ML-1376](#) [831010C3.0](#)  
[831060C3.TL](#) [831090C2.EL](#) [83131904](#) [84212012](#) [8AS239](#) [8HM73-3](#) [903VB1-PG](#) [914CE1-6G](#) [PL-100](#) [11SM1077-H4](#) [11SM1077-H58](#)  
[11SM1-TN107](#) [11SM405](#) [11SM703-T](#) [11SM8423-H2](#) [11SX37-T](#) [11SX48-H58](#) [11SX55-H58](#) [11SM2442-T](#) [11SM76-T](#) [11SM77-H58](#)  
[11SM77-T](#) [11SM863-T](#) [11SM866](#) [11SX47-H58](#) [A7CN-1M-1-LEFT](#)