
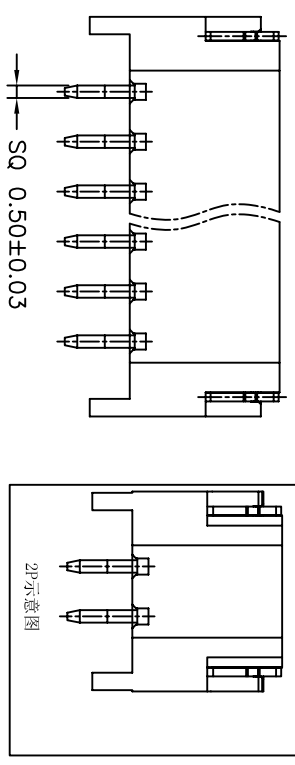
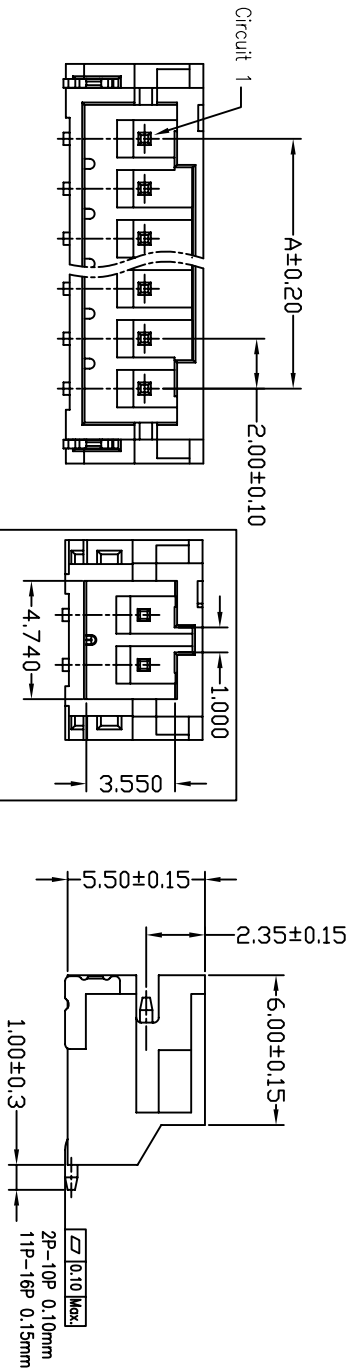


REV	ECN NO.	DESCRIPTION	DATE	DESIGN
A/2		新增PIN脚规格&输入与输出力	18/03/29	王惠春

Specifications:  
 Current rating: 2A AC/DC.  
 Voltage rating: 100V AC/DC  
 Temperature range: -40°C~+105°C.  
 Contact resistance: 10mΩ Max.  
 Insulation resistance: 1000MΩ Min.  
 Withstanding voltage: 800V AC/minute.  
 Material: PA9T/LCP UL94V-0.  
 PIN: Brass 0.5\*10.00  
 Terminal/Housing Retention Force: 14.7N(1.5kgf)Min  
 Terminal Insertion Force: 9.8N(1.0kgf)Max

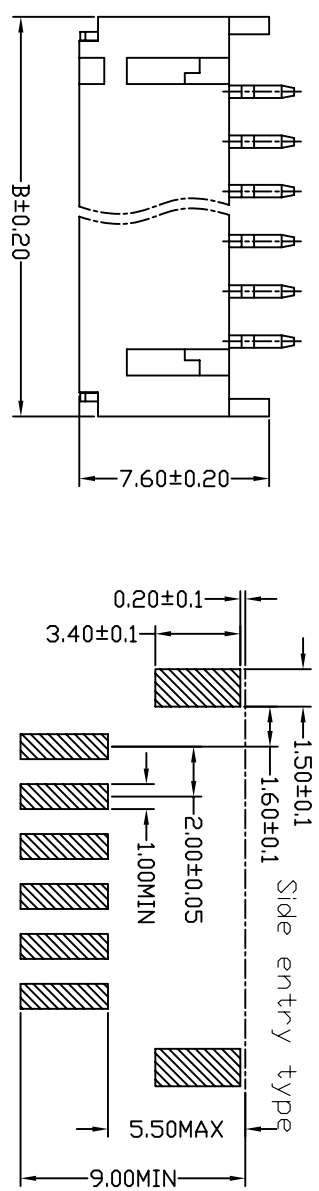

PART NO.	Dimensions	
	A	B
02P	2.00	8.00
03P	4.00	10.00
04P	6.00	12.00
05P	8.00	14.00
06P	10.00	16.00
07P	12.00	18.00
08P	14.00	20.00
09P	16.00	22.00
10P	18.00	24.00
11P	20.00	26.00
12P	22.00	28.00
13P	24.00	30.00
14P	26.00	32.00
15P	28.00	34.00
16P	30.00	36.00

**CNJM** Joint More Precision electronics Co., Ltd.

DIM	TOL	DIM	TOL
X	/	X*	/
XX	0.25	XX*	/
XXX	0.15	XXX*	/
XXXX	0.10	XXXX*	/

DRAW NO.	DATE	P/N NO.	DRAW NAME:
DESIGN: 陈雪峰	20180329	CNJM2001WR-S-NP	2.0mm pitch 90° wifer
CHECK: 杨焯			
REVIEW: /		REV. A/2	SCALE 1:1
			UNIT: mm
			SHEET 1 OF 1

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [CNJM](#) manufacturer:*

Other Similar products are found below :

[57102-F02-18ULF](#) [58102-G61-06LF](#) [0009485154](#) [009176003701906](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#) [622-0430](#) [622-3653LF](#)  
[63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [644827-2](#) [65495-038](#) [65692-001LF](#) [65781-018](#) [65781-047](#) [65817-010LF](#)  
[65817-015LF](#) [66207-023LF](#) [67016-026LF](#) [67095-007LF](#) [68631-112](#) [68645-018](#) [68648-049](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#)  
[70-4853B](#) [707-5020](#) [707-5028](#) [71.350.2428.0](#) [71961-016LF](#) [733-134](#) [754199-000](#) [760-3052](#) [787-8014-00](#) [FCN-367T-T012/H](#) [80.063.4001.1](#)  
[800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#) [803-41-018-10-001000](#) [803-43-014-20-001000](#) [803-43-024-10-001000](#)