

POWER SUPPLIES S-30 Series



Features

- Slim design
- High efficiency, up to 90%
- Low no load power consumption
- Class II, wide range input (85-265VAC)
- Protections: overheating, short circuit, overload, overvoltage, supply voltage interruption
- LED indicator for power on
- DIN rail mountable





Technical data

MODEL		S-30-05	S-30-10	S-30-12	S-30-24
OUTPUT	DC VOLTAGE	5V	10V	12V	24V
	RATED CURRENT	6A	3A	2.5A	1.3A
	VOLTAGE TOLERANCE	+ - 2%	+ - 2%	+ - 2%	+ - 2%
	RATED POWER	30W	30W	30W	30W
	RIPPLE & NOISE	80mVp-p	120mVp-p	120mVp-p	150mVp-p

INPUT	VOLTAGE RANGE	85 ~ 265VAC 90 ~ 385VDC	
	FREQUENCY RANGE	47 ~ 63Hz	
	EFFICIENCY	90%	
	AC CURRENT	0.88A/115VAC	0.48/230VAC
WORKING TEMP. / HUMIDITY		-20 ~ 60°C / 20 ~ 90% RH	

Dimensions

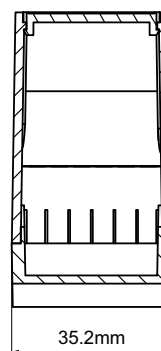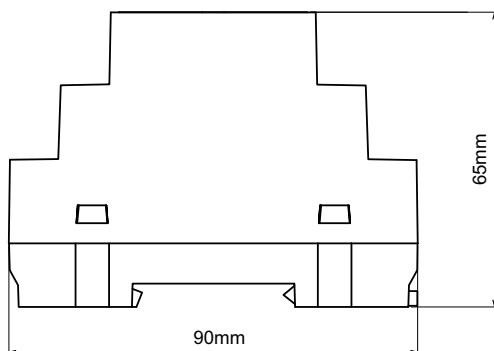

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [DIN Rail Power Supplies](#) category:

Click to view products by [Cobi](#) manufacturer:

Other Similar products are found below :

[PS-S6024](#) [DVP01PU-S](#) [DVP06AD-S](#) [DVDPNET-SL](#) [DVPDT01-S](#) [DVPPS01](#) [PS-6012](#) [PS9Z-5R1G](#) [PS-C24024](#) [DVP08ST11N](#)
[DVPACAB530](#) [DVPCOPM-SL](#) [DVPEN01-SL](#) [DVPPF01-S](#) [ADNB008-48-1PM-C](#) [ADNB017-24-1PM-C](#) [ADNB040-24-1PM-C](#) [ADNB034-12-1PM-C](#) [SS14011524](#) [PS-UPS40](#) [PSD-A60W12](#) [96PS-A120WDIN](#) [PSD-A60W48](#) [PSD-A40W12](#) [PSD-A40W24](#) [PSD-A60W24](#) [SMP21-L20-DC24V-5A](#) [PSD-A40W48](#) [S8T-DCBU-02](#) [PS-S4024](#) [NTPS-24-1.3](#) [ZI-20](#) [PST-96024](#) [S82YVSC4P](#) [PS-S4005](#) [PS-10024](#) [PS-S10024](#)
[PS-C12024](#) [PSP-480S24](#) [PS-C48024](#) [PSC-2024](#) [PSC-4012](#) [PSC-4048](#) [PSC-9615](#) [PSC-15124](#) [PSC-15148](#) [PSC-24148](#) [PSC-48148](#) [TRIO-PS-2G/1AC/12DC/5/C2LP](#) [PSA-6024](#)