



Chip Inductors– 1008HQ (2520)

- Highest Q factors of any Coilcraft chip this body size, roughly 20% higher than our popular 1008CS and HS parts.
- Exceptional SRFs, tight tolerance and batch consistency

Coilcraft **Designer's Kit C323** contains samples of all 5% inductance tolerance parts. Kits with 2% tolerance are also available. To order, contact Coilcraft or purchase on-line at <http://order.coilcraft.com>.

Part number ¹	Inductance ³ (nH)	Percent tolerance ⁴	Q min ⁵	SRF min ⁶ (GHz)	DCR max ⁷ (Ohms)	Irms ⁸ (A)
1008HQ-3N0X_L_2	3.0 @ 50 MHz	5	70 @ 1500 MHz	8.10	0.04	1.6
1008HQ-4N1X_L_	4.1 @ 50 MHz	5	75 @ 1500 MHz	6.20	0.05	1.6
1008HQ-7N8X_L_2	7.8 @ 50 MHz	5	75 @ 500 MHz	3.80	0.05	1.6
1008HQ-10NX_L_	10 @ 50 MHz	5,2	60 @ 500 MHz	3.60	0.06	1.6
1008HQ-12NX_L_	12 @ 50 MHz	5,2	70 @ 500 MHz	2.80	0.06	1.5
1008HQ-18NX_L_	18 @ 50 MHz	5,2,1	62 @ 350 MHz	2.70	0.07	1.4
1008HQ-22NX_L_	22 @ 50 MHz	5,2	62 @ 350 MHz	2.05	0.07	1.4
1008HQ-33NX_L_	33 @ 50 MHz	5,2	75 @ 350 MHz	1.70	0.09	1.3
1008HQ-36NX_L_	36 @ 50 MHz	5,2	65 @ 350 MHz	1.40	0.09	1.3
1008HQ-39NX_L_	39 @ 50 MHz	5,2	75 @ 350 MHz	1.30	0.09	1.3
1008HQ-47NX_L_	47 @ 50 MHz	5,2,1	75 @ 350 MHz	1.45	0.12	1.2
1008HQ-56NX_L_	56 @ 50 MHz	5,2,1	75 @ 350 MHz	1.23	0.12	1.2
1008HQ-68NX_L_	68 @ 50 MHz	5,2,1	80 @ 350 MHz	1.15	0.13	1.1
1008HQ-82NX_L_	82 @ 50 MHz	5,2	80 @ 350 MHz	1.06	0.16	1.1
1008HQ-R10X_L_	100 @ 50 MHz	5,2	62 @ 350 MHz	0.82	0.16	1.0

1. When ordering, specify **tolerance, termination and packaging** codes:

1008HQ-R10XGLC

- Tolerance:** F = 1% G = 2% J = 5%
(Table shows stock tolerances in bold.)
- Termination:** L = RoHS compliant silver-palladium-platinum-glass frit.
R = RoHS compliant matte tin over nickel over silver-platinum-glass frit.
Special order: T = RoHS tin-silver-copper (95.5/4/0.5) or S = non-RoHS tin-lead (63/37).
- Packaging:** C = 7" machine-ready reel. EIA-481 embossed plastic tape (2000 parts per full reel). Quantities less than full reel available: in tape (not machine ready) or with leader and trailer (\$25 charge).
D = 13" machine-ready reel. EIA-481 embossed plastic tape. Factory order only, not stocked (7500 parts per full reel).
B = Less than full reel. In an effort to simplify our part numbering system, Coilcraft is eliminating the need for multiple packaging codes. When ordering, simply change the last letter of your part number from B to C.

- Part is wound on low profile coilform.
- Inductance measured using a Coilcraft SMD-A fixture in an Agilent/HP 4286A impedance analyzer with Coilcraft-provided correlation pieces.
- Tolerances in bold are stocked for immediate shipment.
- Q measured using an Agilent/HP 4291A with an Agilent/HP 16193 test fixture.
- For SRF less than 6 GHz, measured using an Agilent/HP 8753D network analyzer and a Coilcraft SMD-D test fixture. For SRF greater than 6 GHz, measured using an Agilent/HP 8722ES network analyzer and a Coilcraft SMD-D test fixture.
- DCR measured on a Cambridge Technology micro-ohmmeter and a Coilcraft CCF840 test fixture.
- Current that causes a 15°C temperature rise from 25°C ambient. This information is for reference only and does not represent absolute maximum ratings.
- Electrical specifications at 25°C.

For part marking data, visit <http://www.coilcraft.com/colrcode.cfm>. Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

Core material Ceramic

Terminations RoHS compliant silver-palladium-platinum-glass frit. Other terminations available at additional cost.

Weight 32.4– 35.7 mg; 17.1– 17.7 mg (Low profile parts)

Ambient temperature –40°C to +125°C with Irms current

Maximum part temperature +140°C (ambient + temp rise).

Storage temperature Component: –40°C to +140°C. Tape and reel packaging: –40°C to +80°C

Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

Temperature Coefficient of Inductance (TCL) +25 to +125 ppm/°C

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)

Packaging 2000/7" reel; 7500/13" reel

Standard height parts: Plastic tape: 8 mm wide, 0.23 mm thick, 4 mm pocket spacing, 1.8 mm pocket depth

Low profile parts: Plastic tape: 8 mm wide, 0.3 mm thick, 4 mm pocket spacing, 1.6 mm pocket depth

PCB washing Tested to MIL-STD-202 Method 215 plus an additional aqueous wash. See [Doc787_PCB_Washing.pdf](#).



US +1-847-639-6400 sales@coilcraft.com
UK +44-1236-730595 sales@coilcraft-europe.com
Taiwan +886-2-2264 3646 sales@coilcraft.com.tw
China +86-21-6218 8074 sales@coilcraft.com.cn
Singapore + 65-6484 8412 sales@coilcraft.com.sg

Document 190-1 Revised 12/01/21

© Coilcraft Inc. 2021


This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.

COILCRAFT ACCURATE
PRECISION REPEATABLE
 MEASUREMENTS
 SEE WEB SITE **TEST FIXTURES**





Chip Inductors – 1008HQ Series (2520)

Typical Q vs Frequency

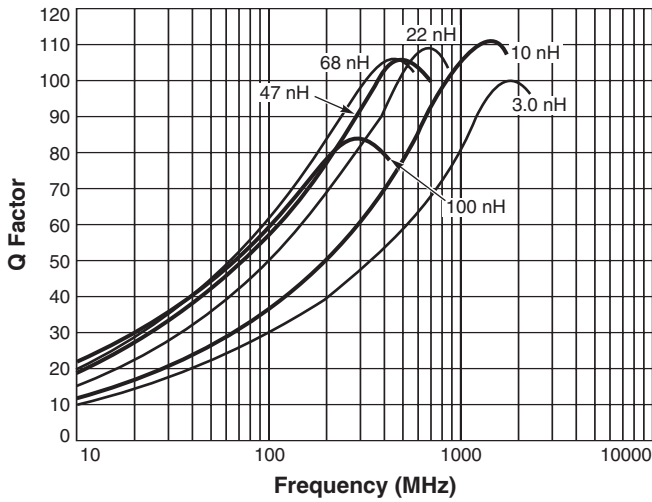

Typical L vs Frequency

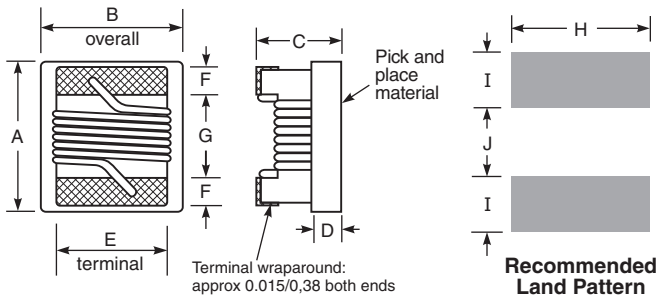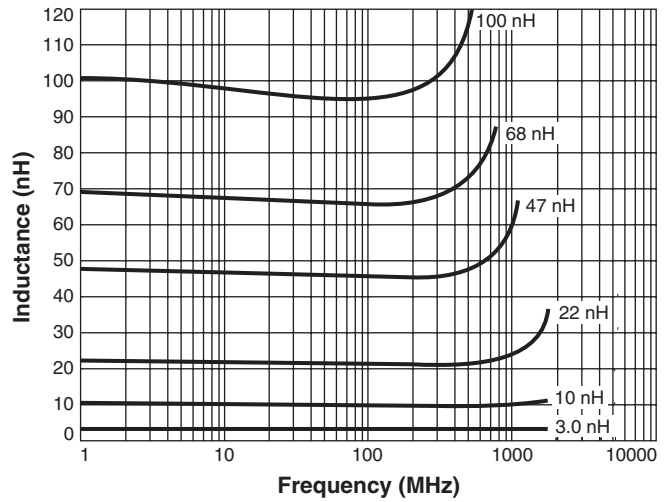

A	B	C	D	E	F	G	H	I	J
max	max	max*	ref						
0.115	0.110	0.080	0.020	0.080	0.020	0.060	0.100	0.040	0.050
2,92	2,79	2,03	0,51	2,03	0,51	1,52	2,54	1,02	1,27

* Low profile parts: 0.050/1,27
 Height dimension (C) is before optional solder application. For maximum height dimension including solder, add 0.006 in / 0,152 mm.

S-Parameter files
 ON OUR WEB SITE
SPICE models
 ON OUR WEB SITE

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [Coilcraft](#) manufacturer:

Other Similar products are found below :

[CR43NP-680KC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#) [CTX32CT-100](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHL1ECTTP18NJ](#) [MHL1JCTTD12NJ](#)
[PE-51506NL](#) [PE-53601NL](#) [PE-53602NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2-2R2TR](#) [HC2LP-R47-R](#) [HC3-2R2-R](#) [1206CS-151XG](#) [RCH664NP-140L](#) [RCH664NP-4R7M](#)
[RCH8011NP-221L](#) [RCP1317NP-332L](#) [RCP1317NP-391L](#) [RCR1010NP-470M](#) [RCR110DNP-331L](#) [DH2280-4R7M](#) [DS1608C-106](#) [ASPI-4020HI-R10M-T](#) [B10TJ](#) [B82477P4333M](#) [B82498B3101J000](#) [B82498B3680J000](#) [ELJ-RE27NJF2](#) [1812CS-153XJ](#) [1812CS-183XJ](#) [1812CS-223XJ](#) [1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#) [1812LS-224XJ](#) [1812LS-563XJ](#)