

# SMT Data Line EMI Filters

CQ7584-AL  
CJ5100-AL  
CR7856-AL



- Low profile (<5.0 mm) compact surface mount packages
- Ideal for use to suppress up to 100 MHz common mode noise for general differential signal line filtering
- Provides over 40 dB common mode noise attenuation
- Inductances from 0.47 mH to 4.7 mH
- Up to 0.85 Arms
- 500 Vrms Isolation (hipot)
- Upon request, additional values may be available for particular applications



**Core material** Ferrite

**Terminations** RoHS compliant tin-silver-copper over tin over nickel over phos bronze

**Weight** 0.22 – 0.27 g

**Ambient temperature** –40°C to +85°C with Irms current

**Maximum part temperature** +125°C (ambient + temp rise)

**Storage temperature** Component: –40°C to +125°C.

Tape and reel packaging: –40°C to +80°C

**Resistance to soldering heat** Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

**Moisture Sensitivity Level (MSL)** 1 (unlimited floor life at <30°C / 85% relative humidity)

**Failures in Time (FIT) / Mean Time Between Failures (MTBF)**

38 per billion hours / 26,315,789 hours, calculated per Telcordia SR-332

**Packaging**

**CQ7584-AL** 250/7" reel; 1000/13" reel Plastic tape: 16 mm wide, 0.4 mm thick, 12 mm pocket spacing, 4.8 mm pocket depth

**CJ5100-AL** 250/7" reel; 1000/13" reel Plastic tape: 16 mm wide, 0.4 mm thick, 12 mm pocket spacing, 4.9 mm pocket depth

**CR7856-AL** 250/7" reel; 1000/13" reel Plastic tape: 16 mm wide, 0.4 mm thick, 12 mm pocket spacing, 4.8 mm pocket depth

**PCB washing** Tested to MIL-STD-202 Method 215 plus an additional aqueous wash. See [Doc787\\_PCB\\_Washing.pdf](#).

Part number	Common mode peak impedance (kOhms)	Cutoff frequency (MHz)	Inductance (mH)		Irms (A)	DCR max (Ohms)	Isolation (Vrms)	Length max (mm)	Width max (mm)	Height max (mm)	Page
			nom	min							
CQ7584-AL	6.81 @ 4.1 MHz	760	2.20	1.54	0.65	0.40	500	9.4	5.6	4.8	2
CJ5100-AL	4.49 @ 9.9 MHz	920	0.47	0.329	0.85	0.24	500	9.4	6.0	4.8	3
CR7856-AL	11.11 @ 1.9 MHz	460	4.70	3.29	0.47	1.3	500	9.4	5.5	4.9	4



# SMT Data Line EMI Filter – CQ7584-AL

Part number <sup>1</sup>	Common mode impedance max (kOhms)	Cutoff frequency <sup>2</sup> (MHz)	Inductance (mH) <sup>3</sup>		I <sub>rms</sub> <sup>4</sup> (A)	DCR max <sup>5</sup> (Ohms)	Isolation <sup>6</sup> (Vrms)
			nom	min			
CQ7584-AL_	6.81 @ 4.4 MHz	760	2.20	1.54	0.65	0.40	500


1. When ordering, please specify **packaging** code:

**CQ7584-ALC**



- Packaging:**
- C** = 7" machine-ready reel. EIA-481 embossed plastic tape (250 parts per full reel).
  - B** = Less than full reel. In tape, but not machine ready. To have a leader and trailer added (\$25 charge), use code letter C instead.
  - D** = 13" machine-ready reel. EIA-481 embossed plastic tape Factory order only, not stocked (1000 parts per full reel).

2. Frequency at which the differential mode attenuation equals 3 dB
  3. Inductance shown for each winding, measured at 10 kHz, 0.1 Vrms, 0 Adc on an Agilent/HP 4263B LCR meter or equivalent.
  4. Current that causes a 40°C temperature rise from 25°C ambient. This information is for reference only and does not represent absolute maximum ratings.
  5. DCR is specified per winding.
  6. Isolation (hipot) measured for two seconds.
  7. Electrical specifications at 25°C.
- Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

## Typical Attenuation

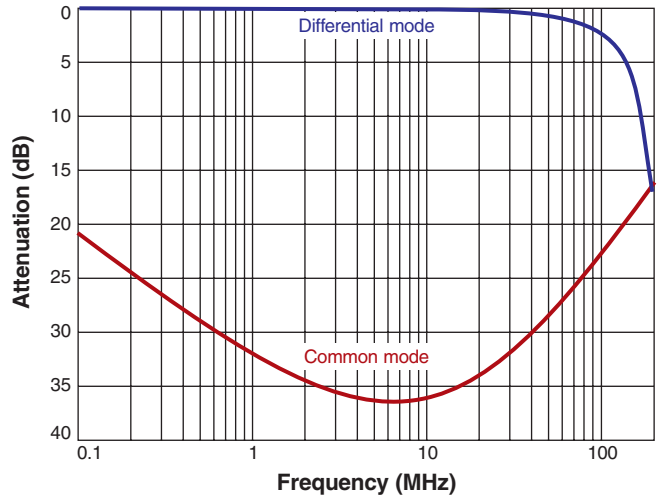

## Typical Impedance versus Frequency

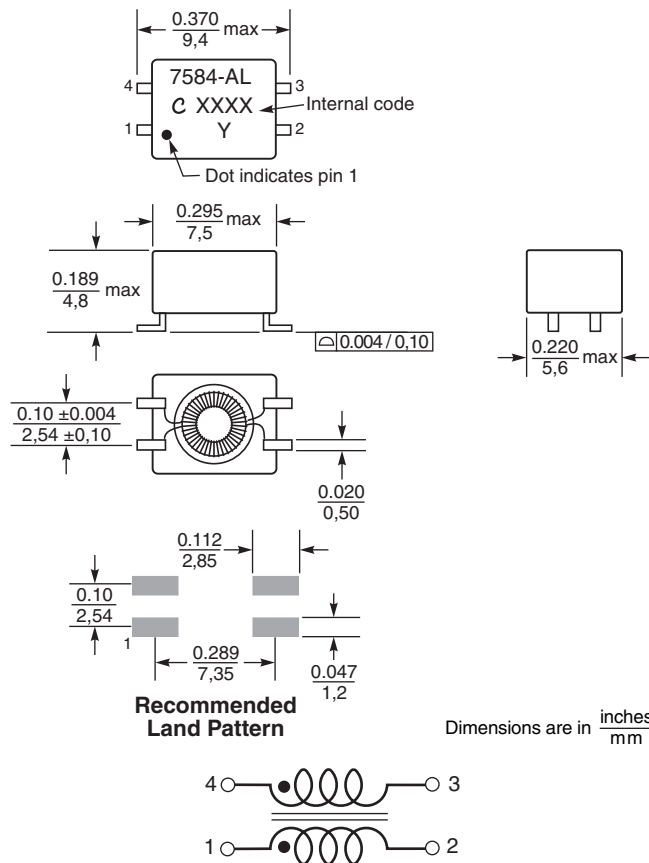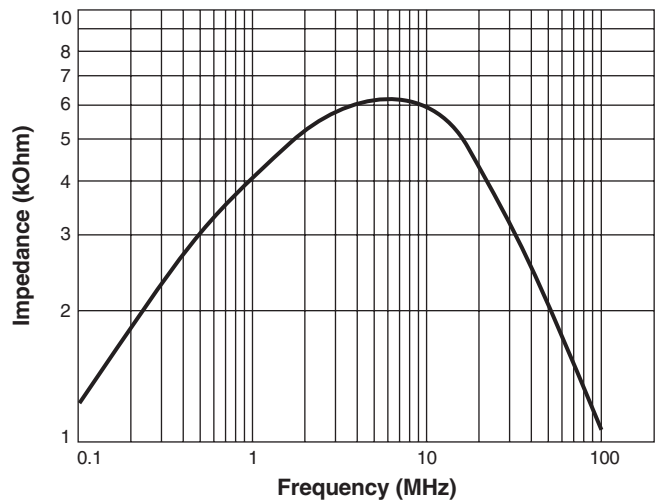

**US** +1-847-639-6400 sales@coilcraft.com  
**UK** +44-1236-730595 sales@coilcraft-europe.com  
**Taiwan** +886-2-2264 3646 sales@coilcraft.com.tw  
**China** +86-21-6218 8074 sales@coilcraft.com.cn  
**Singapore** + 65-6484 8412 sales@coilcraft.com.sg

Document 1194S-2 Revised 11/16/18  
 © Coilcraft Inc. 2018  
 This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.



# SMT Data Line EMI Filter – CJ5100-AL

Part number <sup>1</sup>	Common mode impedance max (kOhms)	Cutoff frequency <sup>2</sup> (MHz)	Inductance (mH) <sup>3</sup>		I <sub>rms</sub> <sup>4</sup> (A)	DCR max <sup>5</sup> (Ohms)	Isolation <sup>6</sup> (Vrms)
			nom	min			
CJ5100-AL_	4.49 @ 9.9MHz	920	0.47	0.329	0.85	0.24	500


1. When ordering, please specify **packaging** code:

**CJ5100-ALC**




- Packaging:**
- C** = 7" machine-ready reel. EIA-481 embossed plastic tape (250 parts per full reel).
  - B** = Less than full reel. In tape, but not machine ready. To have a leader and trailer added (\$25 charge), use code letter C instead.
  - D** = 13" machine-ready reel. EIA-481 embossed plastic tape Factory order only, not stocked (1000 parts per full reel).

2. Frequency at which the differential mode attenuation equals 3 dB
  3. Inductance shown for each winding, measured at 100 kHz, 0.1 Vrms, 0 Adc on an Agilent/HP 4263B LCR meter or equivalent.
  4. Current that causes a 40°C temperature rise from 25°C ambient. This information is for reference only and does not represent absolute maximum ratings.
  5. DCR is specified per winding.
  6. Isolation (hipot) measured for two seconds.
  7. Electrical specifications at 25°C.
- Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

## Typical Attenuation

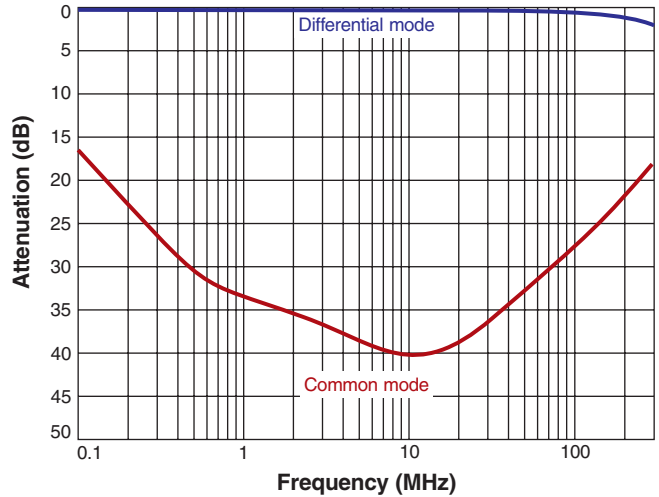

## Typical Impedance versus Frequency

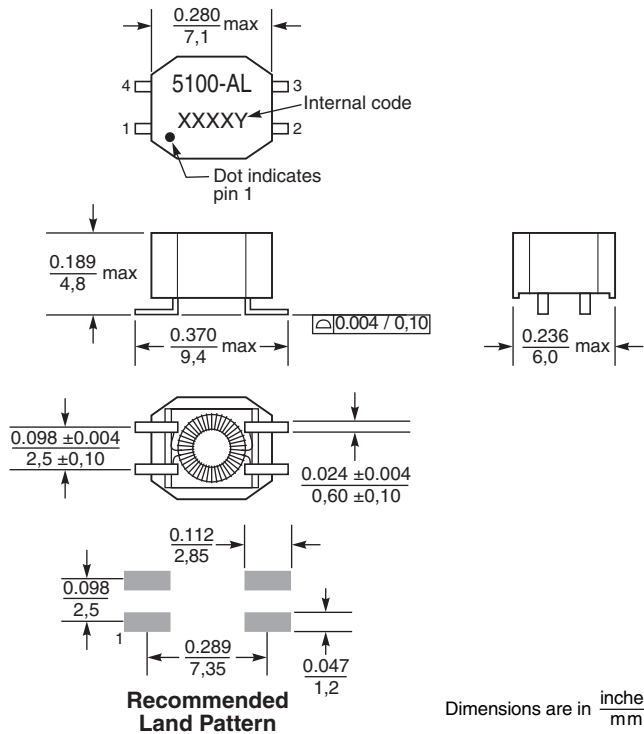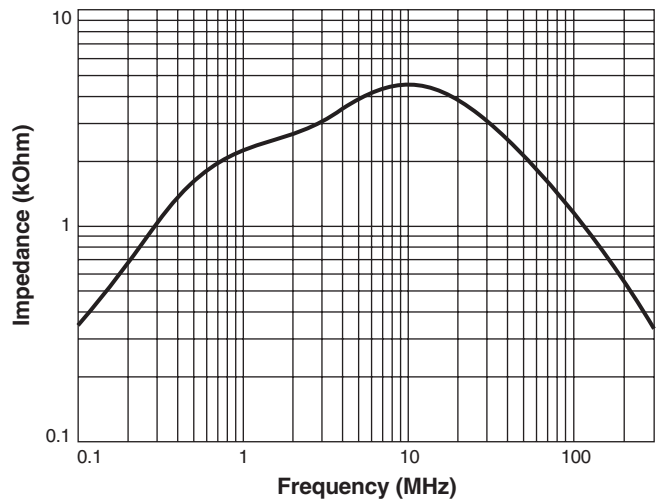

**US** +1-847-639-6400 sales@coilcraft.com  
**UK** +44-1236-730595 sales@coilcraft-europe.com  
**Taiwan** +886-2-2264 3646 sales@coilcraft.com.tw  
**China** +86-21-6218 8074 sales@coilcraft.com.cn  
**Singapore** + 65-6484 8412 sales@coilcraft.com.sg

Document 1194S-3 Revised 11/16/18  
 © Coilcraft Inc. 2018  
 This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.



# SMT Data Line EMI Filter – CR7856-AL

Part number <sup>1</sup>	Common mode impedance max (kOhms)	Cutoff frequency <sup>2</sup> (MHz)	Inductance (mH) <sup>3</sup>		I <sub>rms</sub> <sup>4</sup> (A)	DCR max <sup>5</sup> (Ohms)	Isolation <sup>6</sup> (Vrms)
			nom	min			
CR7856-AL_	11.11 @ 1.9 MHz	460	4.70	3.29	0.47	1.3	500


1. When ordering, please specify **packaging** code:

**CR7856-ALC**




- Packaging:**
- C** = 7" machine-ready reel. EIA-481 embossed plastic tape (250 parts per full reel).
  - B** = Less than full reel. In tape, but not machine ready. To have a leader and trailer added (\$25 charge), use code letter C instead.
  - D** = 13" machine-ready reel. EIA-481 embossed plastic tape Factory order only, not stocked (1000 parts per full reel).

2. Frequency at which the differential mode attenuation equals 3 dB
  3. Inductance shown for each winding, measured at 10 kHz, 0.1 Vrms, 0 Adc on an Agilent/HP 4263B LCR meter or equivalent.
  4. Current that causes a 40°C temperature rise from 25°C ambient. This information is for reference only and does not represent absolute maximum ratings.
  5. DCR is specified per winding.
  6. Isolation (hipot) measured for two seconds.
  7. Electrical specifications at 25°C.
- Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

## Typical Attenuation

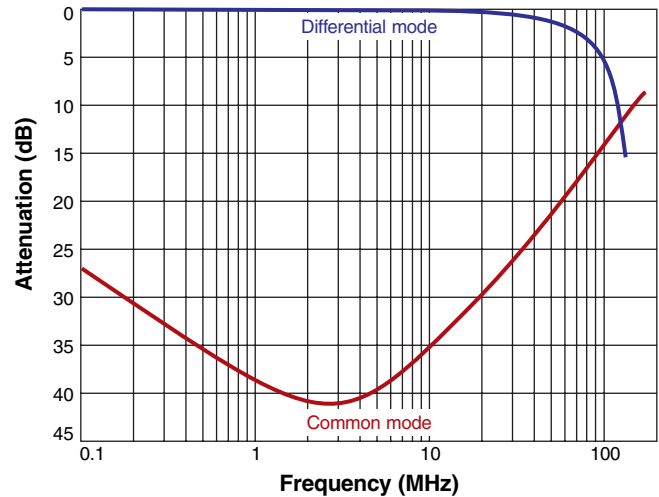

## Typical Impedance versus Frequency

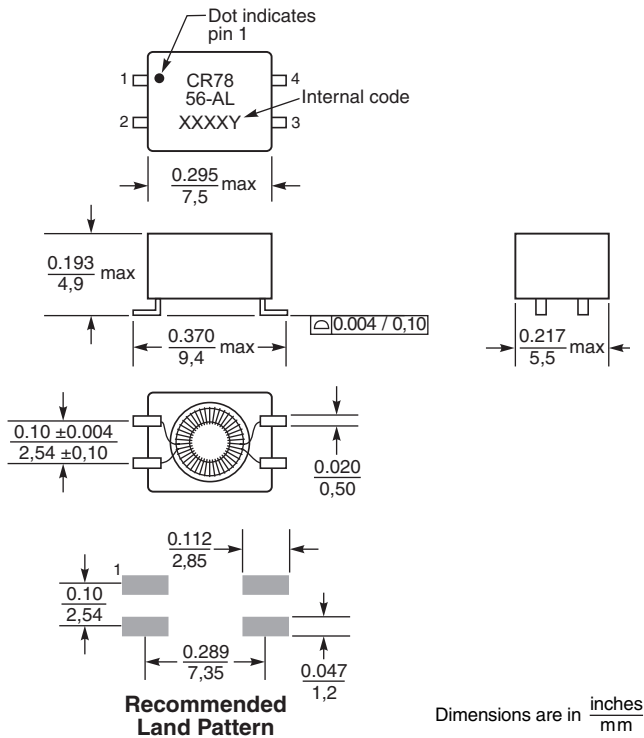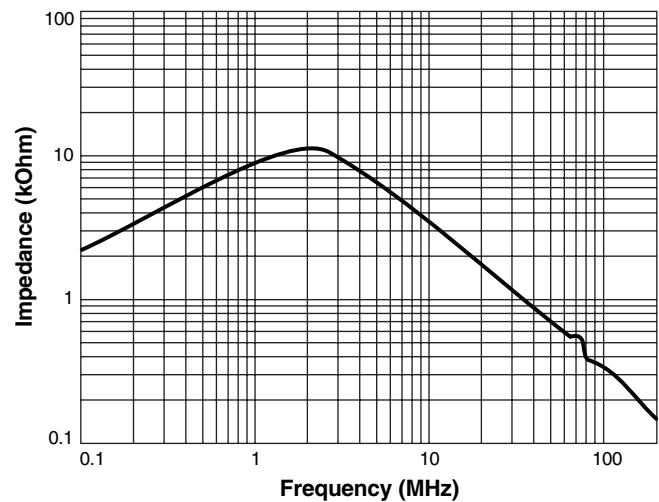

**US** +1-847-639-6400 sales@coilcraft.com  
**UK** +44-1236-730595 sales@coilcraft-europe.com  
**Taiwan** +886-2-2264 3646 sales@coilcraft.com.tw  
**China** +86-21-6218 8074 sales@coilcraft.com.cn  
**Singapore** + 65-6484 8412 sales@coilcraft.com.sg

Document 1194S-4 Revised 11/16/18  
 © Coilcraft Inc. 2018  
 This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Common Mode Chokes / Filters](#) category:*

*Click to view products by [Coilcraft](#) manufacturer:*

Other Similar products are found below :

[PE-64683](#) [RD5122-6-9M6](#) [RGCMF1210900H3T](#) [ST6118T-R](#) [FE3X025-10-7NL](#) [T8114NLT](#) [TCM0806G-350-2P-T](#) [TCM0806G-650-2P-T](#)  
[IND-0110](#) [UAL21VR0802000](#) [UALSC023000000](#) [UALSC1020JH000](#) [UALSU10VR15019](#) [UALSU9VD070100](#) [36-00037](#) [5701610000](#)  
[UALW21HS072450](#) [UALSU9HF050500](#) [UALSU9H0208000](#) [UAL24VK06450CH](#) [PLT10HH501100PNB](#) [PLT10HH401100PNB](#)  
[PLT10HH1026R0PNB](#) [PE-67531](#) [TLH10UB](#) [113 OR5](#) [2752045447](#) [CM8663Z161B-10](#) [7351V](#) [CMF16-153131](#) [T8116NLT](#) [CMS2-10-R](#)  
[FE2X10-4-2NL](#) [T8003NLT](#) [CTX66-19521-R](#) [RC212-0.5-10M](#) [RC112-0.4-15M](#) [RC212-0.6-6M8](#) [RC212-0.4-15M](#) [RC112-0.3-30M](#) [4534-3](#)  
[WTCF2012Z0M751PB](#) [PH9408.814NLT](#) [B82498B3221J000](#) [PAC6006.364NLT](#) [PAC6006.444NLT](#) [PAC6006.204NLT](#) [PH9407.204NLT](#)  
[PAC6006.264NLT](#) [PH9408.105NLT](#) [PH9408.494NLT](#)