


Planar Transformer For Maxim MAX17599 PWM Controller

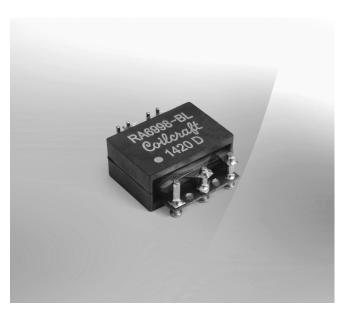

- · Forward mode transformer for the Maxim MAX17599 Active Clamp Current-Mode PWM Controller
- 18 36 V input; 12 V, 3.3 A output

32 mm pocket spacing, 9.35 mm pocket depth

solvents, see Doc787_PCB_Washing.pdf

9 64

- 1500 Vrms, one minute isolation from primary to secondary and gate windings
- Specified on reference design MAXREFDES41#

Core material Ferrite

Terminations Matte tin over nickel over brass. Weight 10.6 g Ambient temperature -40°C to +85°C Storage temperature Component: -40°C to +85°C. Tape and reel packaging: -40°C to +80°C Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity) Failures in Time (FIT) / Mean Time Between Failures (MTBF) 38 per billion hours / 26,315,789 hours, calculated per Telcordia SR-332 Packaging 200/13" reel Plastic tape: 44 mm wide, 0.37 mm thick,

PCB washing Tested with pure water or alcohol only. For other

Inductance Leakage DCR max (mOhms) Turns ratio at 0 A² Part inductance gate number¹ ±20%(µH) pri sec max (µH) pri:sec pri : gate Output³ RA6998-BL 80 22.0 12 V, 3.3 A 15.0 45.0 0.35 1:1.125 1:0.375

1. When ordering, please specify a **packaging** code:

RA6998-BLD


- Packaging: D = 13" machine ready reel. EIA-481 embossed plastic tape (200 parts per full reel). Quantities less than full reel available: in tape (not machine ready) or with leader and trailer (\$25 charge).
 - B = Less than full reel. In an effort to simplify our part numbering system, Coilcraft is eliminating the need for multiple packaging codes. When ordering, simply change the last letter of your part number from B to D.


2. Inductance is measured at 250 kHz, 0.1 Vrms.

3. Output is for the secondary winding. Output of the gate winding is 4 V, 0.25 A

4. Electrical specifications at 25°C.

Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

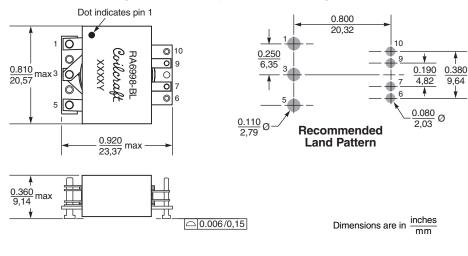





US +1-847-639-6400 sales@coilcraft.com UK +44-1236-730595 sales@coilcraft-europe.com Taiwan +886-2-2264 3646 sales@coilcraft.com.tw China +86-21-6218 8074 sales@coilcraft.com.cn Singapore + 65-6484 8412 sales@coilcraft.com.sg

Document 1199 Revised 07/03/14

© Coilcraft Inc. 2020

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Audio Transformers / Signal Transformers category:

Click to view products by Coilcraft manufacturer:

Other Similar products are found below :

CX2041NLT MGPWT-00449-P PE-64961 H1302FNLT H5008FNL H5012FNL H5020FNLT H5077NLT H5079NLT H5084FNLT B78476A9558A003 1812WBT2-4 1879479-1 HX2260FNL HX5014FNL EX2024FNL FL1066 T1137NLT T3012NL PE-65812FNL PE-65848FNLT H1174FNL H1302FNL H5015FNL H5019EFNL H5062FNLT CX2047LNL MGPWT-00059-P MGPWT-00266-P MGPWT-00278-P MGPWT-00431-P TTC-100 TTC-143-H TTC-5032-1 BX1194WNLT HX1234NLT HX5008FNLT HX5019FNL HX5084NL 3-1879385-5 TX1263NLT 4-1879391-0 T1142NL HX6101FNL HX5084FNL HX1148NL HX5020FNLT HX5014FNLT T1124NL 1879732-1