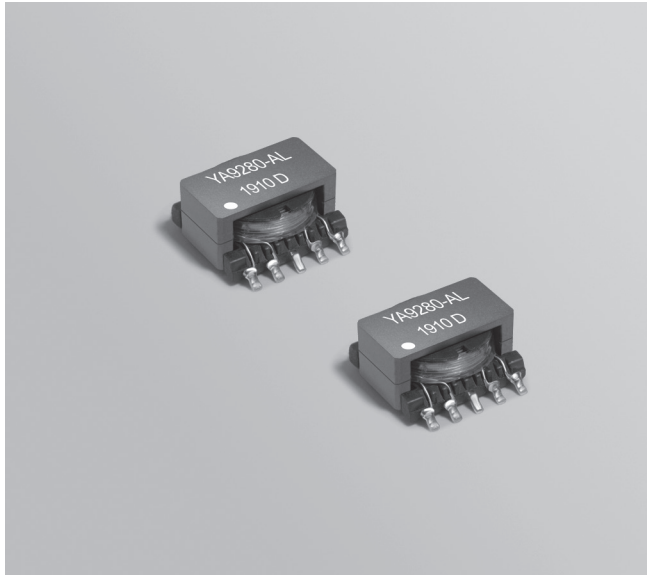


**NEW!**

# Flyback Transformer

For Maxim Integrated MAX17690  
Peak Current Mode Controller

- Isolated non-synchronous flyback transformers developed for Maxim Integrated MAX17690 reference design.
- Designed for discontinuous conduction mode, 17 – 36 V input
- 1500 Vrms isolation primary to secondary windings

**Core material** Ferrite**Terminations** RoHS tin-silver-copper over tin over nickel over phosphorus bronze. Other terminations available at additional cost.**Weight** 1.5 g**Ambient temperature** –40°C to +125°C**Storage temperature** Component: –40°C to +125°C.

Tape and reel packaging: –40°C to +80°C

**Resistance to soldering heat** Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles**Moisture Sensitivity Level (MSL)** 1 (unlimited floor life at <30°C / 85% relative humidity)**Failures in Time (FIT) / Mean Time Between Failures (MTBF)**

38 per billion hours / 26,315,789 hours, calculated per Telcordia SR-332

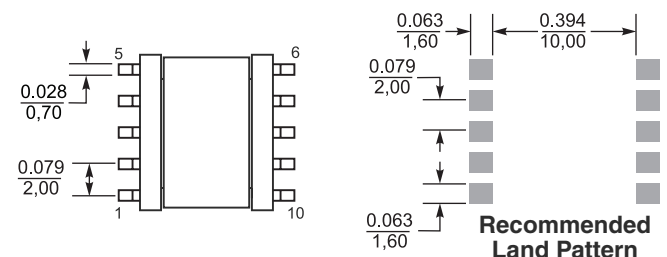
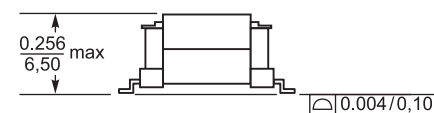
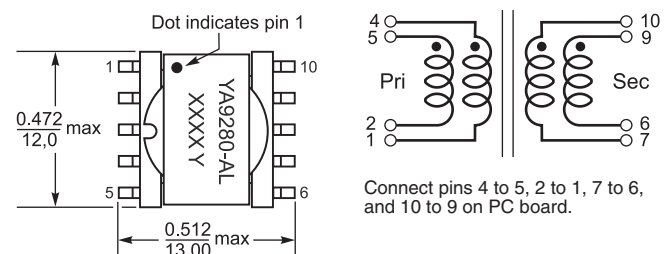
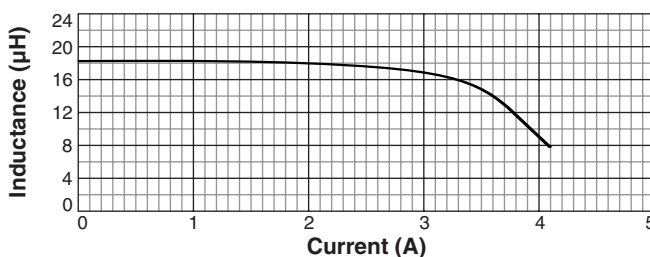
**Packaging** 500 per 13" reel Plastic tape: 24 mm wide, 0.36 mm thick, 16 mm pocket spacing, 6.13 mm pocket depth**PCB washing** Tested to MIL-STD-202 Method 215 plus an additional aqueous wash. See [Doc787\\_PCB\\_Washing.pdf](#).

Part number <sup>1</sup>	Inductance at 0 Adc <sup>2</sup> ±10% (µH)	Inductance at 2.6 Adc <sup>3</sup> min (µH)	Isat <sup>4</sup> (A)	DCR max (Ohms) pri	DCR max (Ohms) sec	Leakage Inductance <sup>5</sup> max (µH)	Turns ratio pri : sec	Isolation <sup>6</sup> (Vrms)	Output
YA9280-ALD	18	15.3	3.75	0.101	0.027	0.572	1 : 0.4	1500	5 V, 1.5A

- Packaging:** D = 13" machine ready reel. EIA-481 embossed plastic tape (500 parts per full reel).
- Inductance is for the primary, measured at 150 kHz, 0.1 Vrms, 0 Adc.
- Minimum inductance is for the primary, measured at 150 kHz, 0.1 Vrms, 2.6 Adc.
- DC current that causes an inductance drop of 30% (typ) from its value without current.
- Leakage inductance is for the primary winding with the secondary windings shorted.
- Isolation (hipot) measured between windings for one minute.
- Electrical specifications at 25°C.

Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

## L vs Current

Dimensions are in  $\frac{\text{inches}}{\text{mm}}$

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Audio Transformers](#) / [Signal Transformers](#) category:*

*Click to view products by [Coilcraft](#) manufacturer:*

Other Similar products are found below :

[CX2041NLT](#) [MGPWT-00449-P](#) [PE-64961](#) [H1302FNLT](#) [H5008FNL](#) [H5012FNL](#) [H5020FNLT](#) [H5077NLT](#) [H5079NLT](#) [H5084FNLT](#)  
[B78476A9558A003](#) [1812WBT2-4](#) [1879479-1](#) [HX2260FNL](#) [HX5014FNL](#) [EX2024FNL](#) [FL1066](#) [T1137NLT](#) [T3012NL](#) [PE-65812FNL](#) [PE-65848FNLT](#) [H1174FNL](#) [H1302FNL](#) [H5015FNL](#) [H5019EFNL](#) [H5062FNLT](#) [CX2047LNL](#) [MGPWT-00059-P](#) [MGPWT-00266-P](#) [MGPWT-00278-P](#) [MGPWT-00431-P](#) [TTC-100](#) [TTC-143-H](#) [TTC-5032-1](#) [BX1194WNLT](#) [HX1234NLT](#) [HX5008FNLT](#) [HX5019FNL](#) [HX5084NL](#) [3-1879385-5](#) [TX1263NLT](#) [4-1879391-0](#) [T1142NL](#) [HX6101FNL](#) [HX5084FNL](#) [HX1148NL](#) [HX5020FNLT](#) [HX5014FNLT](#) [T1124NL](#)  
[1879732-1](#)