



**SPECIFICATION FOR APPROVAL**

产品规格承认书

**SMD POWER INDUCTOR**

功率电感

CUSTOMER.

\_\_\_\_\_

MODEL NO.

**MNPF855032-111M-B**

\_\_\_\_\_

CUSTOMER'S PART NO.

\_\_\_\_\_

LILE NO.

\_\_\_\_\_

DATE.

**2024.06.06**

\_\_\_\_\_

REVISION.

**A/0**

\_\_\_\_\_

**CUSTOMER APPROVE**

DATE:

**DRAWING**

**DRAWN BY**

**CHECK BY**

**APPROVAL BY**

林思思

陈健波

曾伟

**DATE: 22024.06.06**



**深圳市迈翔科技有限公司**  
**惠州市迈翔电子有限公司**

黄冈市迈翔电子有限公司 英德市迈翔电子有限公司

5-6F, Building B, Jinhao Smart Park, No. 207 Sihuan South Road, Zhongkai High tech

Zone, Huizhou City, Guangdong Province, China

TEL: +86 0752-3398115 3398116 3398117

Http: //www.coilcrafts.com www.coilmx.com E-mail: pxr@coilmx.com



CUSTOMER		MODEL NO.	MNPF855032-111M-B	REVISION	A/0
FILE NO.		PART NO.		DATE	2024.06.06

1.PRODUCT DIMENSION UNIT:mm

Technical drawings of the coil component showing dimensions:

- A:  $90 \pm 1.0$
- B:  $106 \pm 1.0$
- C: 55MAX
- E:  $27 \pm 1.0$
- F:  $55 \pm 1.0$
- D:  $56 \pm 1.0$
- G: 96

注意：产品须含浸

2.ELECTRICAL REQUIREMENTS

PARAMETER	SPECIFICATION	CONDITION	TEST INSTRUMENTS
L (uH)	<b>110±20%</b>	1KHz/0.3V	MICROTEST 6377
DCR(mΩ)	<b>MAX</b>	At 25°C	TH16052
I sat(A)	<b>150A TYP L0A*70%</b>	1KHz/0.3V	MICROTEST 6377+6220
I rms(A)	<b>120A TYP ΔT≤40°C</b>	1KHz/0.3V	MICROTEST 6377+6220
IR(CORE-COIL)	<b>100MΩ MIN</b>	DC 1000V	CHROMA 19502
Hi-Pot(CORE-COIL)	<b>AC3000V 60SEC</b>	50/60Hz(2mA)	CHROMA 19502

3.MATERIAL LIST

ITEM	MATERIAL	SUPPLIER
CORE	FeSi CORE NPF855032-26u	POCO MAGNETIC
WIRE	扁平线(3.0*8.0*26TS连续)	TAIYI/JIATENG
SOLDER	TIN-Sn99.95	QIANDAO

4.CHARACTERISTICS

- (1). All test data is based on 25°C ambient.
- (2). DC current(A)that will cause L0 to drop approximately 30%Typ
- (3). Operating temperature range: -40°C~+125°C
- (4).The part temperature (ambient + temp rise)should not exceed 125°C under worst case operating conditions. circuit design, component.PWB trace size and thickness,airflow and other cooling provision all affect the part temperature. Part temperature should be verified in the den application

5.SPECIAL REQUEST

- (1)No making on top of the body.

CUSTOMER		MODEL NO.	MNPF855032-111M-B	REVISION	A/0
FILE NO.		PART NO.		DATE	2024.06.06

**6.PRODUCT IDENTIFICATION**


XX XXXX - XXX X X

① ② ③ ④ ⑤

①、 Product Symbol ②、 Dimensions ③、 Inductance

④、 Tolerance: M±20%, N±30%. ⑤、 Material

**7.ELECTRICAL SCHEMATICS**




**8.APPLICATION**

- (1)Low profile,high current power supplies.
- (2)Battery powered devices.
- (3)DC/DC converters in distributed power systems.
- (5)DC/DC converters for field programmable gate array.

**9.FEATURES**

- (1)ROHS compliant.
- (2)Super low resistance,ultra high current rating.
- (3)high performance(I sat)realized by metal dust core.
- (4)Frequency Range:up to 1MHZ.

CUSTOMER		MODEL NO.	MNP855032-111M-B		REVISION	A/0		
FILE NO.		PART NO.			DATE	2024.06.06		
SORT	ITEM	A	B	C	D	E	F	G
PRODUCT & DIMENSION	SPEC	90±1.0	106±1.0	55MAX	56±1.0	27±1.0	55±1.0	96±1.0
	1	89.50	106.50	52.60	55.26	27.40	55.20	96.5
	2	89.80	106.30	52.8	55.30	27.50	55.20	96.5
	3	89.70	106.40	52.90	55.40	27.60	55.60	96.8
	4	89.60	106.50	52.7	55.50	27.50	55.40	96.3
	5	89.80	106.58	52.8	55.60	27.60	55.40	96.4
	X	89.68	106.46	52.76	55.41	27.52	55.36	96.50
	R	0.30	0.28	0.30	0.34	0.20	0.40	0.50
ELECTRICAL & REQUIREMENTS	ITEM	L(μH)	DCR (mΩ)	I sat(A)	DC BIAS	SHAPE:		
	SPEC	110±20%	MAX	150A TYP LOA*70%				
	1	106.50	2.68	83.50	-21.6%			
	2	107.50	2.65	84.30	-21.6%			
	3	103.60	2.68	81.60	-21.2%			
	4	108.50	2.56	83.20	-23.3%			
	5	106.50	2.68	83.50	-21.6%			
	X	106.52	2.65	3.81	-21.9%			
R	4.90	0.12	2.70	0.02				

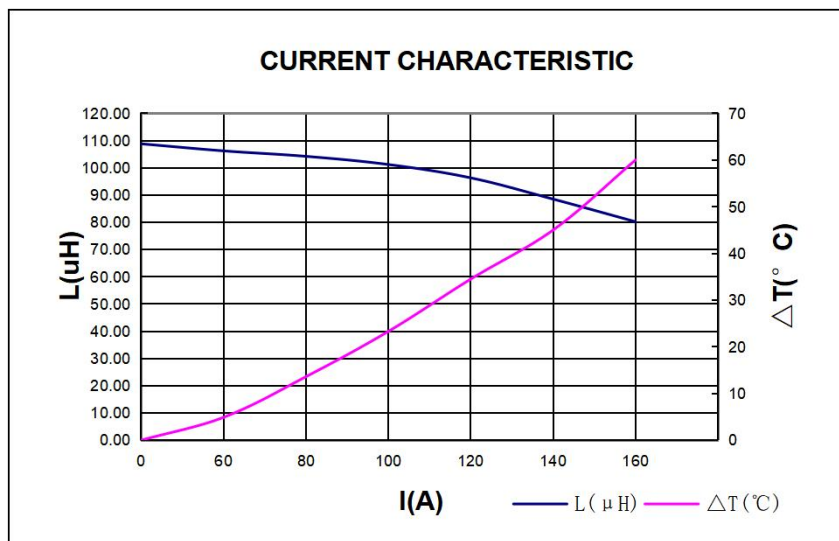


CUSTOMER		MODEL NO.	MNPF855032-111M-B	REVISION	A/0
FILE NO.		PART NO.		DATE	2024.06.06
<b>11.可靠性Reliability</b>					
<b>项目Item</b>	<b>规格与需求 Specification and Requirement</b>		<b>测试方法Test Method</b>		
可焊性 Solderability test	沾锡面积不得小于95%上锡面 Terminals area must have 95% min solder coverage		上锡升温曲线Solder heat proof: (1) 预热: 160±10°C持续90s Preheating: 160±10°C for 90 seconds (2) 恒温时段: 245±5°C持续2±0.5s Retention time: 245±5°C for 2±0.5 seconds		
振动测试 Vibration test	感值变化: 不超过±5% 且无破裂等机械损伤产生 Inductance change: Within±5% Without mechanical damage such as break		(1) 振动频率(10Hz 55Hz 10Hz)60s为一个周期 Vibration frequency: (10Hz to 55Hz to 10Hz) in 60 seconds as a period (2) 振动时间 Vibration time: 三维正交坐标系每个方向振动(周期)循环2小时 Period cycled for 2 hours in each of 3 mutual perpendicular directions (3) 振幅 Amplitude: 1.5 mm Max		
冲击测试 Shock test	感值变化: 不超过±5% 且无破裂等机械损伤产生 Inductance change: Within±5% Without mechanical damage such as break		(1) 最大振幅 Peak value: 100G (2) 脉冲波长 Duration of pulse: 11ms (3) 三维正交坐标系每个方向正负方向冲击3次 Times in each positive and negative direction of 3 mutual perpendicular directions		
冷热冲击 Thermal shock	感值变化: 不超过±5% 且无破裂等机械损伤产生 Inductance change: Within±5% Without mechanical damage such as break		(1)重复以上100个循环Repeat 100 cycle as follow (-40±2°C,30±3分钟) 室温5分钟 (-40±2°C,30±3 minutes) Room temperature,5 minutes (+125±2°C,30±3分钟) 室温5分钟 (+125±2°C,30±3 minutes) Room temperature,5 minutes (2)恢复: 测试于标准条件下恢复48+4/-0小时(参考注释1) Recovery:48+4/-0 hours of recovery under the standard condition after the test. (see Note1)		
耐高温测试 High temperature life test	感值变化: 不超过±5% 且无破裂等机械损伤产生 Inductance change: Within±5% Without mechanical damage such as break		(1)环境条件: 85±2°C Environment condition : 85±2°C 应用电流: 额定电流 Applied current: Rated current (2)持续时间: 1000+4/-0 小时(参考注释1) Duration:1000+4/-0 hours (see Note1)		
耐湿测试 Humidity Resistance	感值变化: 不超过±5% 且无破裂等机械损伤产生 Inductance change: Within±5% Without mechanical damage such as break		(1)环境条件: 60±2°C Environment condition : 60±2°C 湿度: 90~95% Humidity:90~95% 应用电流: 额定电流 Applied current: Rated current (2)持续时间: 1000+4/-0 小时(参考注释1) Duration:1000+4/-0 hours (see Note1)		
低温存放测试 Low temperature life test	感值变化: 不超过±5% 且无破裂等机械损伤产生 Inductance change: Within±5% Without mechanical damage such as break		(1)存储温度 Store temperature -40±2°C下存放 1000+4/-0 小时 -40±2°C for total 1000+4/-0 hours		
高温存放测试 High temperature life test	感值变化: 不超过±5% 且无破裂等机械损伤产生 Inductance change: Within±5% Without mechanical damage such as break		(1)存储温度 Store temperature +125±2°C下存放 1000+4/-0 小时 +125±2°C for total 1000+4/-0 hours		

CUSTOMER		MODEL NO.	MNPF855032-111M-B	REVISION	A0
FILE NO.		PART NO.		DATE	2024.06.06

Reflow curve

※ Reflow Profile

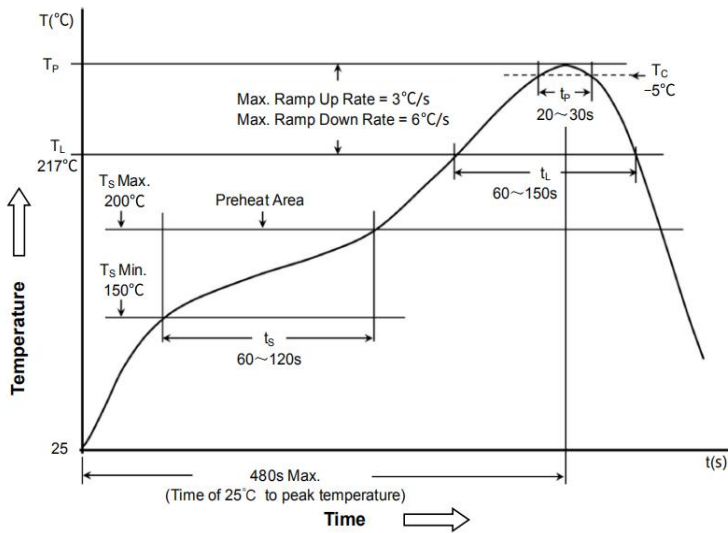

1. Reflow Soldering Method

Reflow Soldering	Tp:255~260°C	Max.30 seconds ( tp )
	217°C	60~150 seconds
Pre-Heat	150 ~ 200°C	60~120 seconds
Time 25°C to peak temperature	8 minutes max.	

2. Soldering iron method : 350±5°C Max.3 seconds.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Fixed Inductors](#) category:*

*Click to view products by [COILMX](#) manufacturer:*

Other Similar products are found below :

[CR32NP-100KC](#) [70F224AI](#) [MHQ1005P10NJ](#) [MHQ1005P1N0S](#) [MHQ1005P2N4S](#) [MHQ1005P3N6S](#) [MHQ1005P5N1S](#) [MHQ1005P8N2J](#)  
[PE-53601NL](#) [PE-53602NL](#) [PG0936.113NLT](#) [9220-20](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2-R47-R](#) [HC8-1R2-R](#)  
[HCF1305-3R3-R](#) [1206CS-151XG](#) [RCH664NP-4R7M](#) [RCP1317NP-391L](#) [DH2280-4R7M](#) [DS1608C-106](#) [B10TJ](#) [B82498B3101J000](#) [ELJ-](#)  
[RE27NJF2](#) [1812CS-153XJ](#) [1812CS-183XJ](#) [1812CS-223XJ](#) [1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#)  
[1812LS-224XJ](#) [1812LS-563XJ](#) [1812LS-683XJ](#) [1812LS-824XJ](#) [NIN-FB101JTR110F](#) [NIN-FB471JTR62F](#) [NIN-FC1R5JTR220F](#) [NIN-](#)  
[HCR15JTRF](#) [NIN-HCR33JTRF](#) [NIN-HDR22JTRF](#) [NIN-HDR82JTRF](#) [NIN-HK2N7STRF](#) [NIN-PA150KTR370F](#) [NIN-PB100KTR550F](#)