

ACGRMS4007-HF

Reverse Voltage: 1000 Volts

Forward Current: 1.0 Amp

RoHS Device

Halogen Free




Features

- Glass Passivation Junction.
- High current capability.
- High surge current capability.
- Low reverse current.
- Comply with AEC-Q101

Mechanical data

- Case: SOD-123F, molded plastic.
 - Epoxy: UL flammability classification rate 94V-0.
 - Terminals: Lead free plating (Tin finish).
- Solderable per MIL-STD-202, Method 208.
- Polarity: Indicated by cathode band.
 - Weight: 0.022 grams(approx.).

Circuit diagram

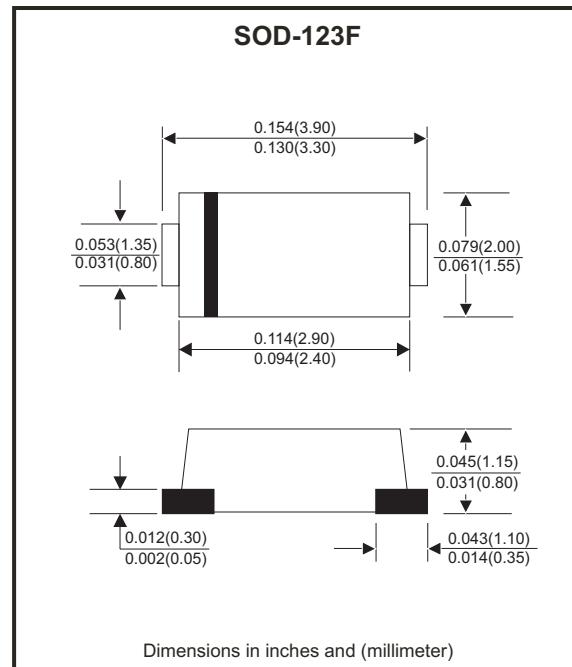

Maximum Ratings (at TA=25°C unless otherwise noted)

Parameter	Symbol	ACGRMS4007-HF	Units
Max. repetitive peak reverse voltage	V _{RRM}	1000	V
Max. DC blocking voltage	V _{DC}	1000	V
Max. RMS voltage	V _{RMS}	700	V
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	I _{FSM}	30	A
Max. average forward rectified current	I _F	1.0	A
Max. instantaneous forward voltage I _F =1.0A @ 25°C	V _F	1.1	V
Max. DC reverse current at rated TA=25°C	I _R	10	µA
DC blocking voltage TA=125°C	I _R	100	µA
Typical junction capacitance (Note 1)	C _J	10	pF
Typical thermal resistance	R _{θJC}	50	°C/W
Operating temperature range	T _J	-55 to +150	°C
Storage temperature range	T _{STG}	-55 to +150	°C

Notes: 1. Measured at 1.0MHZ and applied reverse voltage of 4.0V DC.

Company reserves the right to improve product design , functions and reliability without notice.

REV: A

SMD General Purpose Rectifiers

Comchip
SMD Diode Specialist

Rating and Characteristic Curves (ACGRMS4007-HF)

Fig.1 - Typical Forward Current Derating Curve

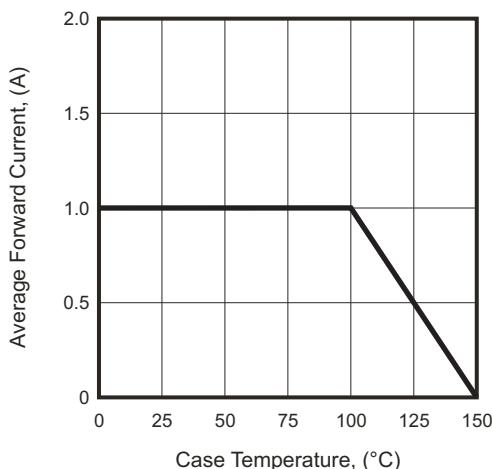


Fig.2 - Typical Forward Characteristics

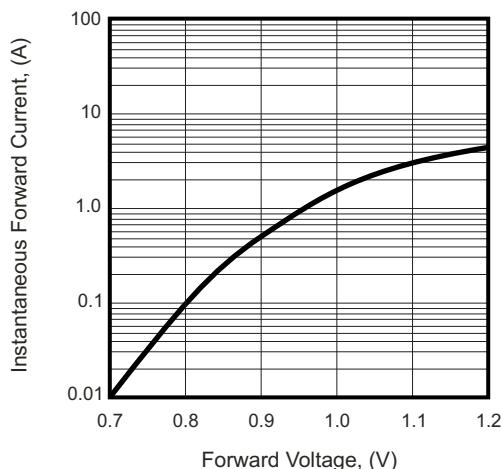


Fig.3 - Maximum Non-repetitive Forward Surge Current

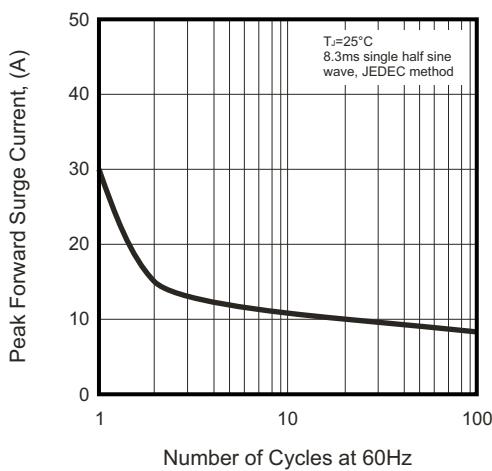


Fig.4 - Typical Reverse Characteristics






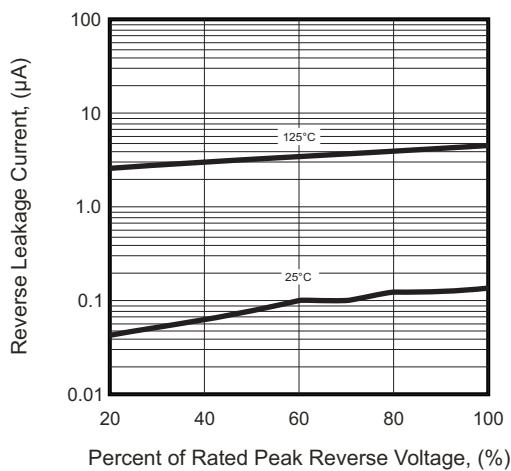


Fig.5 - Typical Junction Capacitance

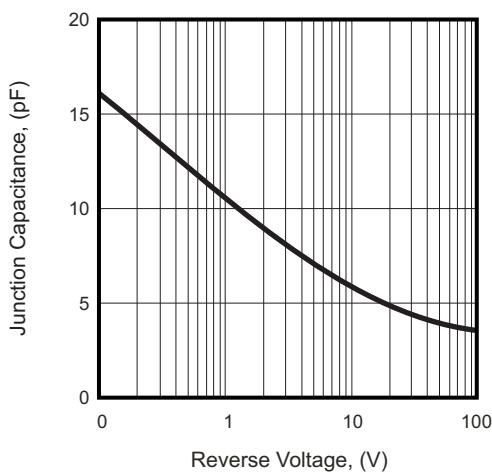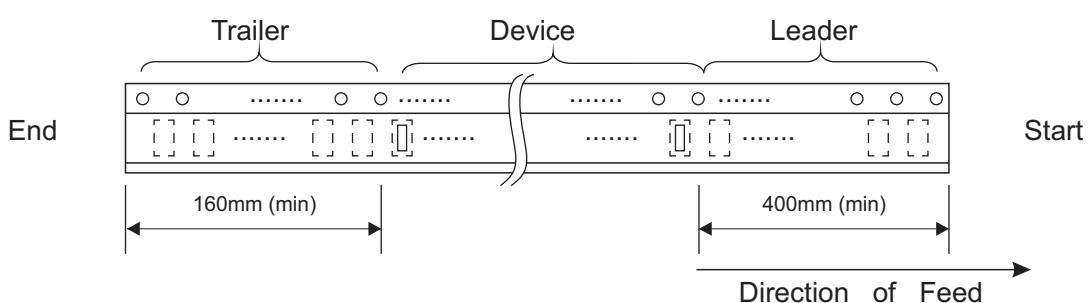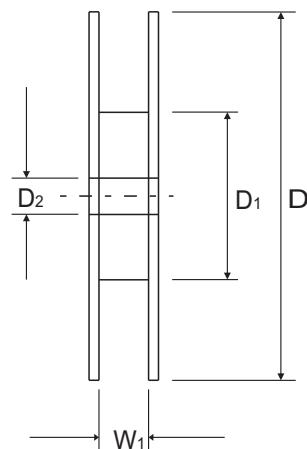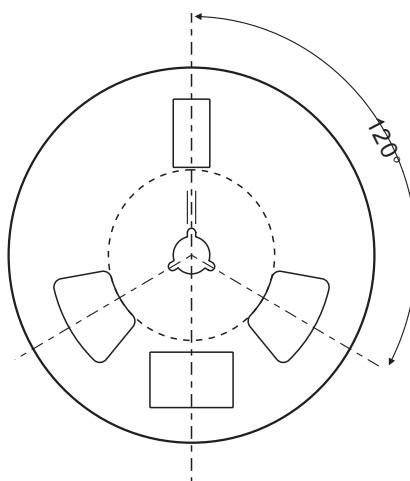

Company reserves the right to improve product design , functions and reliability without notice.

Reel Taping Specification

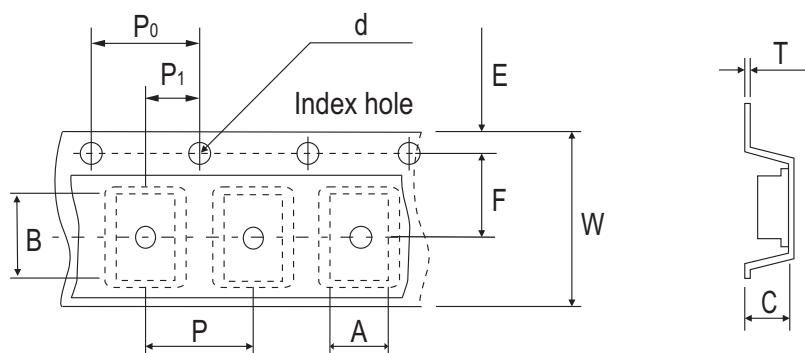

	SYMBOL	A	B	C	d	D	D1	D2
SOD-123F	(mm)	1.90 ± 0.10	4.01 ± 0.10	1.32 ± 0.10	1.50 ± 0.10	178 Max.	60.30 ± 1.00	13.30 ± 1.00
	(inch)	0.075 ± 0.004	0.158 ± 0.004	0.052 ± 0.004	0.059 ± 0.004	7.00 Max.	2.374 ± 0.039	0.524 ± 0.004

	SYMBOL	E	F	P	P_0	P_1	W	W1
SOD-123F	(mm)	1.75 ± 0.10	3.50 ± 0.05	4.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.05	8.00 ± 0.30 -0.10	9.30 ± 1.00
	(inch)	0.069 ± 0.004	0.138 ± 0.002	0.158 ± 0.004	0.158 ± 0.004	0.079 ± 0.002	0.315 ± 0.012 -0.004	0.366 ± 0.039

Company reserves the right to improve product design , functions and reliability without notice.

REV: A

Marking Code


Part Number	Marking code
ACGRMS4007-HF	D7



XX = Product type marking code

Suggested PAD Layout

SIZE	SOD-123F	
	(mm)	(inch)
A	1.34	0.053
B	1.80	0.071
C	1.52	0.060
D	2.86	0.113
E	4.20	0.165

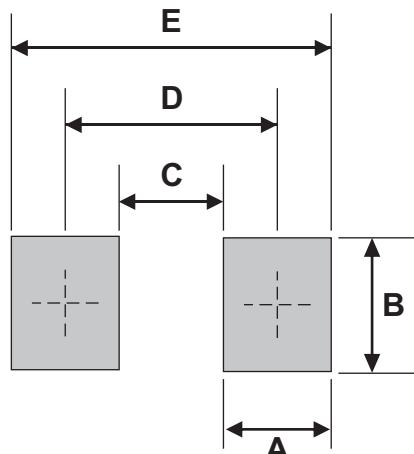

Note:

1.The pad layout is for reference purposes only.

Standard Packaging

Case Type	REEL PACK	
	REEL (pcs)	Reel Size (inch)
SOD-123F	3,000	7

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Rectifiers](#) category:

Click to view products by [Comchip](#) manufacturer:

Other Similar products are found below :

[D91A](#) [DA24F4100L](#) [DD89N1600K-A](#) [DD89N16K-K](#) [RL252-TP](#) [DSEI2X30-06C](#) [1N4005-TR](#) [BAV199-TP](#) [UFS120Je3/TR13](#)
[JANS1N6640US](#) [DD89N16K](#) [DD89N16K-A](#) [481235F](#) [067907F](#) [MS306](#) [ND104N08K](#) [SPA2003-B-D-A01](#) [US2JFL-TP](#) [UFS105Je3/TR13](#)
[A1N5404G-G](#) [ACGRA4007-HF](#) [ACGRB207-HF](#) [RF301B2STL](#) [RF501B2STL](#) [UES1306](#) [UES1302](#) [BAV199E6433HTMA1](#) [ACGRC307-HF](#)
[ACEFC304-HF](#) [JANTXV1N5660A](#) [UES1106](#) [GS2K-LTP](#) [D126A45C](#) [D251N08B](#) [SCHJ22.5K](#) [SM100](#) [SCPA2](#) [SDHD5K](#) [STTH20P035FP](#)
[VS-8EWS12S-M3](#) [VS-12FL100S10](#) [ACGRA4001-HF](#) [MUR420GP-TP](#) [1N5404GP-E3/54](#) [ND89N08K](#) [D1821SH45T PR](#) [D1251S45T](#)
[JANTX1N3890](#) [SKN20/16](#) [SKN70/16](#)