

CMS25N03V8A-HF

**N-Channel
RoHS Device
Halogen Free**



Features



- Improved dv/dt capability.
- Fast switching.
- 30V, 25A, $R_{DS(ON)}=18m\Omega@V_{GS}=10V$.

Mechanical data

- Case: PDFN3x3-8L, molded plastic.
- Mounting position: Any.

Circuit Diagram

- G : Gate
- S : Source
- D : Drain

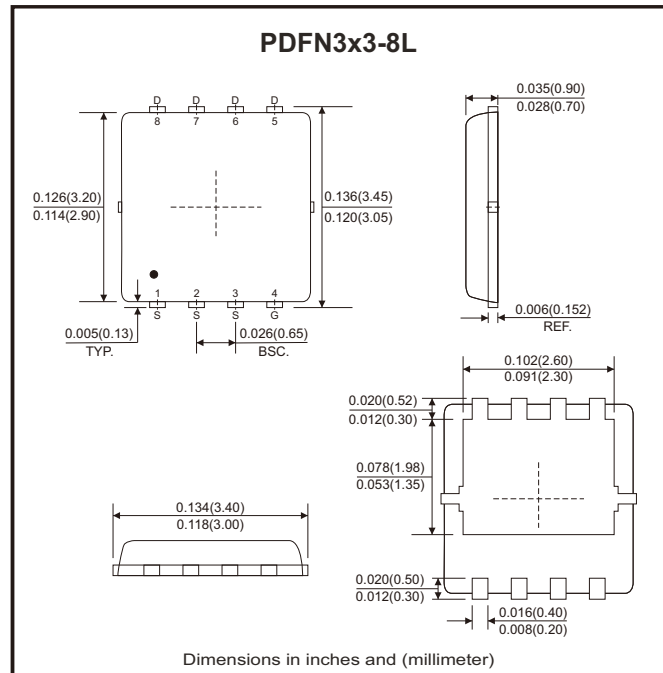

Maximum Ratings (at $T_C=25^\circ C$ unless otherwise noted)

Parameter	Conditions	Symbol	Value	Unit
Drain-source voltage		V_{DS}	30	V
Gate-source voltage		V_{GS}	± 20	V
Drain current-continuous	$T_C = 25^\circ C$	I_D	25	A
	$T_C = 100^\circ C$	I_D	16	
Drain current-pulsed	(Note 1)	I_{DM}	100	A
Single pulse avalanche energy	(Note 2)	E_{AS}	32	mJ
Single pulse avalanche current	(Note 2)	I_{AS}	8	A
Power dissipation	$T_C=25^\circ C$	P_D	21	W
	Derate above $25^\circ C$	P_D	0.17	W/ $^\circ C$
Thermal resistance junction-ambient		$R_{\theta JA}$	62	$^\circ C/W$
Thermal resistance junction-case		$R_{\theta JC}$	6	$^\circ C/W$
Operating junction temperature range		T_J	-50 to +150	$^\circ C$
Storage temperature range		T_{STG}	-50 to +150	$^\circ C$

Electrical Characteristics (at $T_J=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Off Characteristics						
Drain-source breakdown voltage	BV_{DSS}	$V_{GS} = 0V, I_D = 250\mu A$	30			V
Drain-source leakage current	I_{DSS}	$V_{DS} = 30V, V_{GS} = 0V, T_J = 25^\circ\text{C}$			1	μA
		$V_{DS} = 24V, V_{GS} = 0V, T_J = 125^\circ\text{C}$			10	
Gate-source leakage current	I_{GSS}	$V_{GS} = \pm 20V, V_{DS} = 0V$			± 100	nA
On Characteristics						
Static drain-source on-resistance (Note 3)	$R_{DS(on)}$	$V_{GS} = 10V, I_D = 12A$		14	18	m Ω
		$V_{GS} = 4.5V, I_D = 8A$		20	28	
Gate threshold voltage	$V_{GS(th)}$	$V_{GS} = V_{DS}, I_D = 250\mu A$	1.2	1.6	2.5	V
Forward transconductance	g_{fs}	$V_{DS} = 10V, I_D = 6A$		6.5		S
Dynamic and Switching Characteristics						
Total gate charge (Note 3, 4)	Q_g	$V_{DS} = 15V, V_{GS} = 4.5V, I_D = 6A$		4.1	8	nC
Gate-source charge (Note 3, 4)	Q_{gs}			1	2	
Gate-drain charge (Note 3, 4)	Q_{gd}			2.1	4	
Turn-on delay time (Note 3, 4)	$t_{d(on)}$	$V_{DD} = 15V, V_{GS} = 10V, R_G = 6\Omega, I_D = 1A$		2.8	5	nS
Rise time (Note 3, 4)	t_r			7.2	14	
Turn-off delay time (Note 3, 4)	$t_{d(off)}$			15.8	30	
Fall time (Note 3, 4)	t_f			4.6	9	
Input capacitance	C_{iss}	$V_{DS} = 25V, V_{GS} = 0V, F = 1\text{MHz}$		345	500	pF
Output capacitance	C_{oss}			55	80	
Reverse transfer capacitance	C_{rss}			32	45	
Gate resistance	R_g	$V_{GS} = 0V, V_{DS} = 0V, F = 1\text{MHz}$		3.2	6.4	Ω
Drain-Source Diode Characteristics and Ratings						
Continuous source current	I_S	$V_G = V_D = 0V, \text{Force current}$			25	A
Pulsed source current (Note 3)	I_{SM}				50	A
Diode forward voltage (Note 3)	V_{SD}	$V_{GS} = 0V, I_S = 1A, T_J = 25^\circ\text{C}$		0.7	1	V

- Notes: 1. Pulse width limited by maximum junction temperature.
 2. $V_{DD}=25V, V_{GS}=10V, L=1\text{mH}, I_{AS}=8A, R_G=25\Omega$, starting $T_J=25^\circ\text{C}$.
 3. The data tested by pulsed, pulse width $\leq 300\mu\text{s}$, duty cycle $\leq 2\%$.
 4. Essentially independent of operating temperature.

Rating and Characteristic Curves (CMS25N03V8A-HF)

Fig.1 - Continuous Drain Current vs. T_c

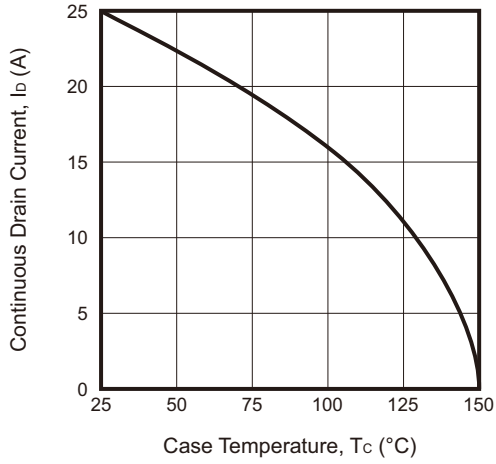


Fig.2 - Normalized $R_{DS(ON)}$ vs. T_J

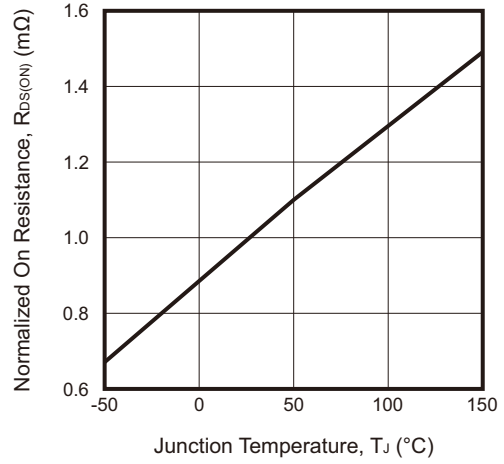


Fig.3 - Normalized V_{th} vs. T_J

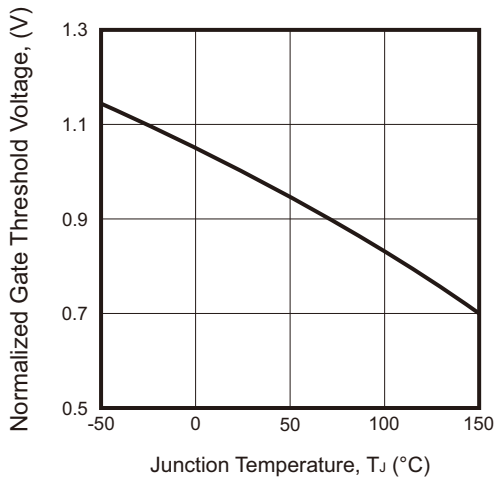


Fig.4 - Gate Charge Waveform






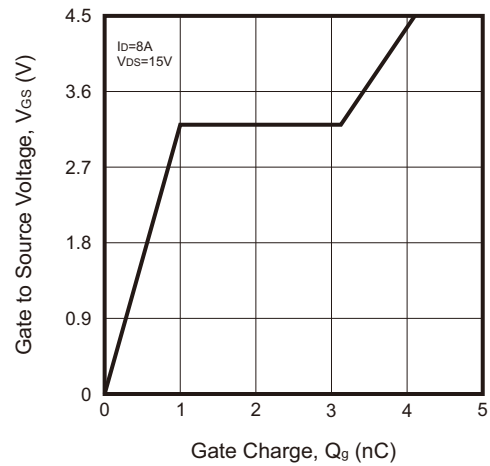


Fig.5 - Max. Safe Operating Area

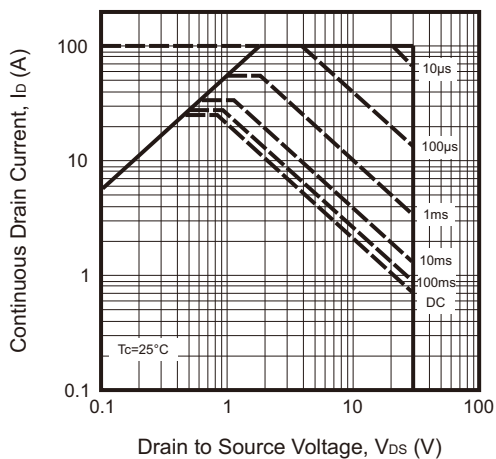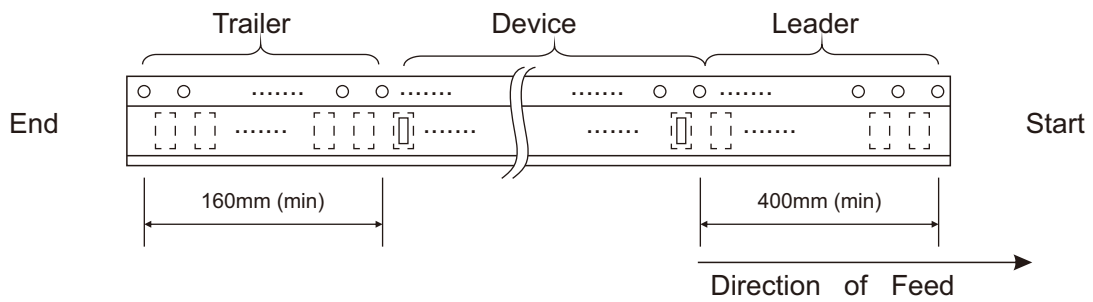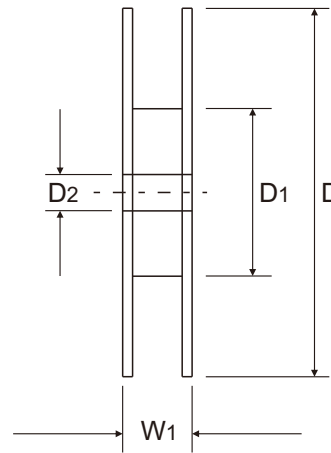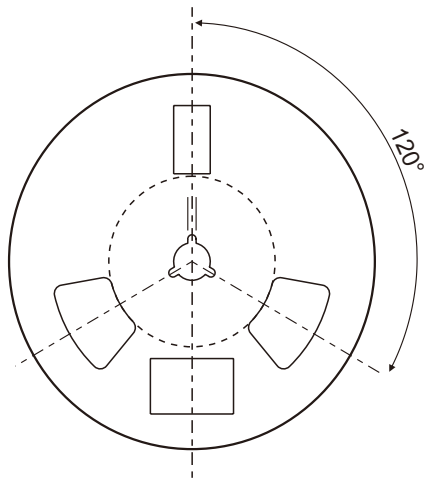


Reel Taping Specification

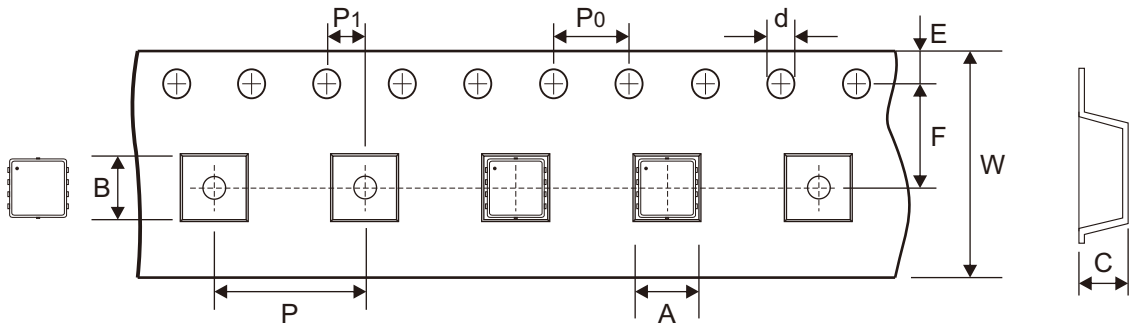

PDFN3x3-8L	SYMBOL	A	B	C	d	D	D1	D2
	(mm)	3.60 ± 0.20	3.55 ± 0.25	1.11 ± 0.12	1.52 ± 0.13	330.5 ± 2.50	95.00 Min	13.15 ± 0.65
	(inch)	0.142 ± 0.008	0.140 ± 0.010	0.044 ± 0.005	0.060 ± 0.005	13.012 ± 0.098	3.740 Min	0.518 ± 0.026
PDFN3x3-8L	SYMBOL	E	F	P	P0	P1	W	W1
	(mm)	1.75 ± 0.10	5.50 ± 0.10	8.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.10	12.00 ± 0.30	18.90 Max
	(inch)	0.069 ± 0.004	0.217 ± 0.004	0.315 ± 0.004	0.157 ± 0.004	0.079 ± 0.004	0.472 ± 0.012	0.744 Max

Marking Code


Part Number	Marking Code
CMS25N03V8A-HF	NC018



XXX YY = Control code

Suggested P.C.B. PAD Layout

SIZE	PDFN3x3-8L	
	(mm)	(inch)
A	0.40	0.016
B	0.60	0.024
C	0.65	0.026
D	0.35	0.014
E	2.35	0.093
F	0.25	0.010
G	2.30	0.091
H	3.55	0.140

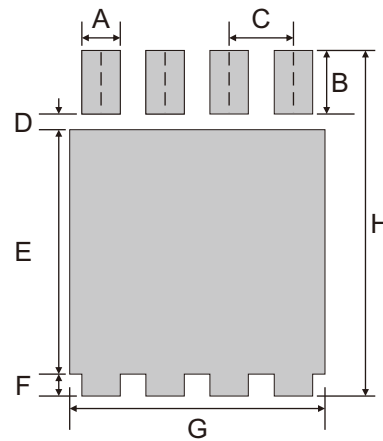

Standard Packaging

Case Type	REEL PACK	
	REEL (pcs)	Reel Size (inch)
PDFN3x3-8L	3,000	13

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Comchip manufacturer](#):

Other Similar products are found below :

[CDBB260-G](#) [CPDA10R5V0P-HF](#) [CDBA340L-HF](#) [1N5819T-G](#) [CDBM140-HF](#) [CZRU52C5V6](#) [CDBF0245](#) [CDBU0530-HF](#) [CPDU5V0U-HF](#)
[ACDBA1200-HF](#) [CDBHM140L-HF](#) [DF210ST-G](#) [ACGRKM4007-HF](#) [CDBMT160-HF](#) [CZRER52C2](#) [ACPDQC5V0C-HF](#) [DF206ST-G](#)
[1.5KE36A-G](#) [CDBQR0130R-HF](#) [CDBQR0230L-HF](#) [CDBHM160L-HF](#) [CZRU52C13-HF](#) [CZRU5V1B](#) [CDBA2200-HF](#) [CDBQR54-HF](#)
[ZENER-KIT](#) [CGRA4004-G](#) [CGRM4007-HF](#) [KBPC1501-G](#) [CURMT104-HF](#) [CDBQR70-HF](#) [CDSQR4148-HF](#) [KBPC2504-G](#) [ACGRAS1W-](#)
[HF](#) [KBPC5004-G](#) [ACGRA4001-HF](#) [CDBUR70](#) [DB106-G](#) [KBPC1502-G](#) [DF06-G](#) [CDBU0130-HF](#) [CZRZ5V1B-HF](#) [CPDER5V0-HF](#)
[DF10S-HF](#) [CZRU52C7V5](#) [CZRER52C3V6-HF](#) [GBJ2504-G](#) [DB101S-G](#) [CDBHM240L-HF](#) [MMBT3904-HF](#)