


General Purpose Transistor

Comchip
SMD Diode Specialist

MMBT3906-HF (PNP)



RoHS Device

Halogen Free



Features

- Epitaxial planar die construction
- As complementary type, the NPN transistor MMBT3906-HF is recommended

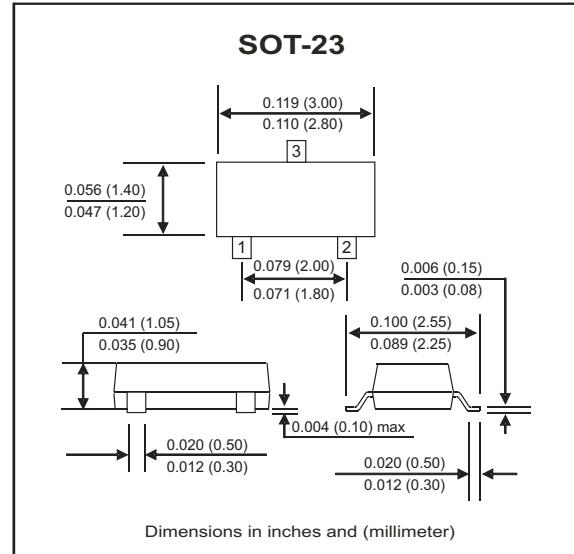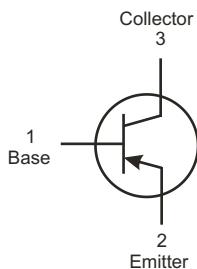

Maximum Ratings (at TA=25°C unless otherwise noted)

Parameter	Symbol	Min	Typ	Max	Unit
Collector-Base voltage	V _{CBO}			-40	V
Collector-Emitter voltage	V _{CEO}			-40	V
Emitter-Base voltage	V _{EBO}			-5	V
Collector current-Continuous	I _c			-0.2	A
Collector dissipation	P _c			0.3	W
Storage temperature and junction temperature	T _{STG} , T _J	-55		+150	°C

Electrical Characteristics (at TA=25°C unless otherwise noted)

Parameter	Conditions	Symbol	Min	Max	Unit
Collector-Base breakdown voltage	I _c =-100μA, I _e =0	V _{(BR)CBO}	-40		V
Collector-Emitter breakdown voltage	I _c =-1mA, I _b =0	V _{(BR)CEO}	-40		V
Emitter-Base breakdown voltage	I _e =-100μA, I _c =0	V _{(BR)EBO}	-5		V
Collector cut-off current	V _{CB} =-40V, I _e =0	I _{cbo}		-0.1	μA
Collector cut-off current	V _{CE} =-40V, I _b =0	I _{ceo}		-0.1	μA
Emitter cut-off current	V _{EB} =-5V, I _c =0	I _{ebo}		-0.1	μA
DC current gain	V _{CE} =-1V, I _c =-10mA	h _{FE(1)}	100	300	
	V _{CE} =-1V, I _c =-50mA	h _{FE(2)}	60		
Collector-Emitter saturation voltage	I _c =-50mA, I _b =-5mA	V _{ce(sat)}		-0.3	V
Base-Emitter saturation voltage	I _c =-50mA, I _b =-5mA	V _{be(sat)}		-0.95	V
Transition frequency	V _{CE} =-20V, I _c =-10mA f=100MHz	f _T	250		Mhz
Delay time	V _{CC} =-3.0V, V _{BE} =-0.5V	t _d		35	nS
Rise time	I _c =-10mA, I _{b1} =-1.0mA	t _r		35	nS
Storage time	V _{CC} =-3.0V _{dc} , I _c =-10mA	t _s		225	nS
Fall time	I _{b1} =I _{b2} =-1.0mA	t _f		75	nS

REV:B

General Purpose Transistor

Comchip
SMD Diode Specialist

RATING AND CHARACTERISTIC CURVES (MMBT3906-HF)

Fig.1- Static Characteristic

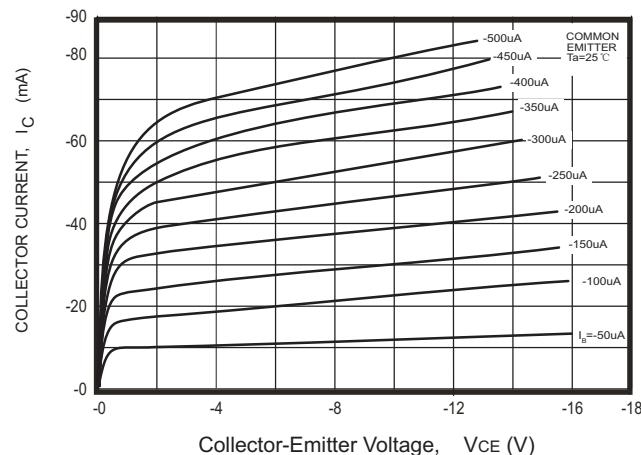


Fig.2- h_{FE} — I_c

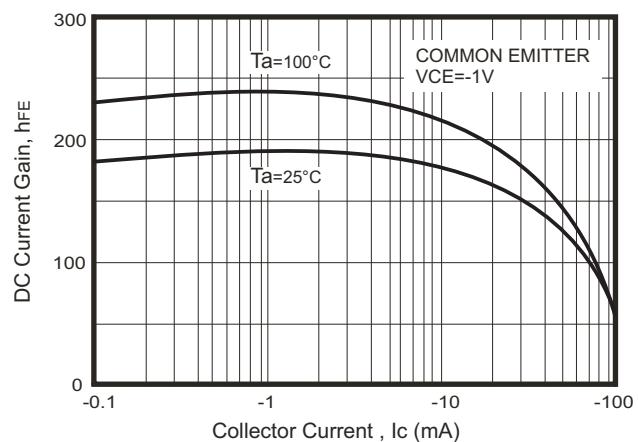


Fig. 3- V_{CEsat} — I_c

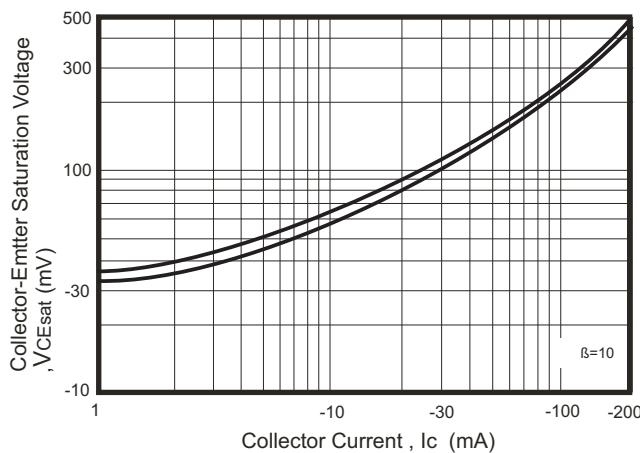


Fig. 4- V_{BEsat} — I_c

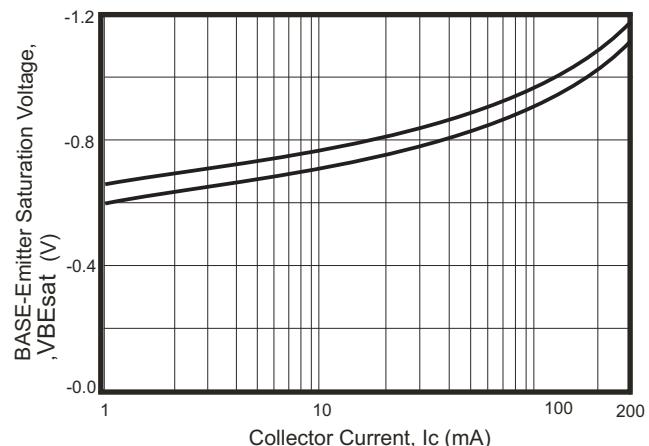


Fig. 5- I_c — V_{BE}


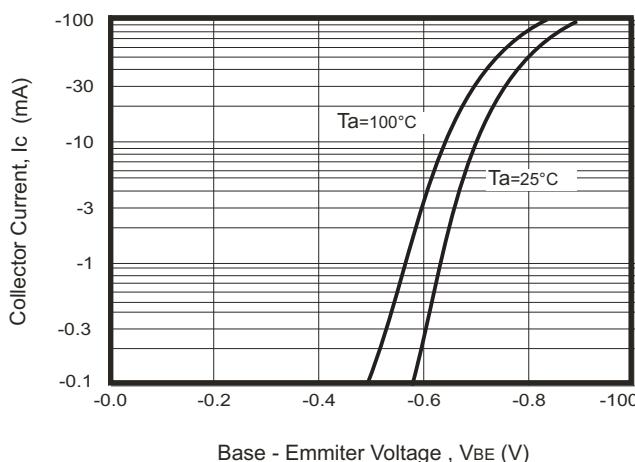


Fig. 6- C_{ob}/C_{ib} — V_{CB}/V_{EB}

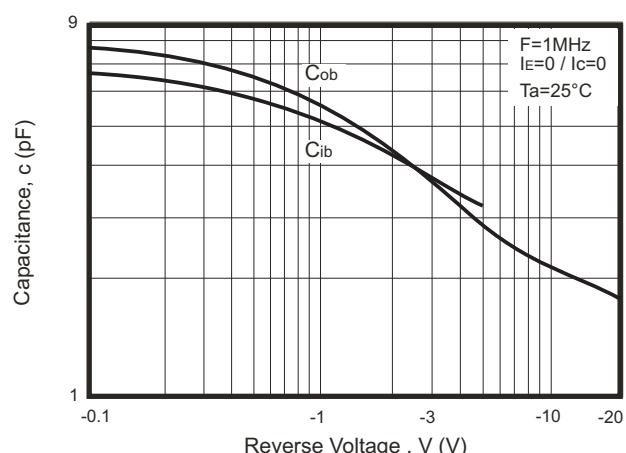

General Purpose Transistor

Comchip
SMD Diode Specialist

RATING AND CHARACTERISTIC CURVES (MMBT3906-HF)

Fig. 7- f_T — I_C



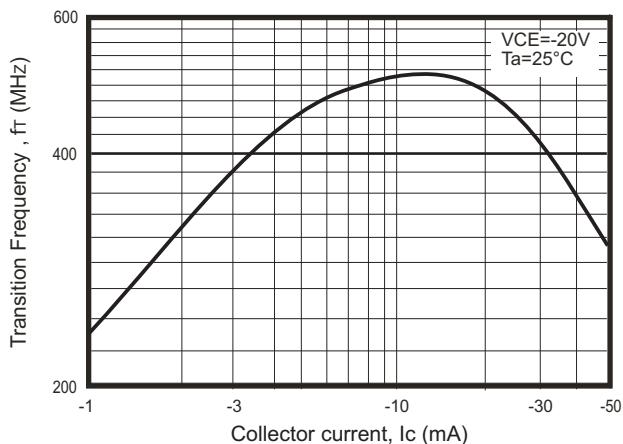


Fig. 8- P_c — T_a

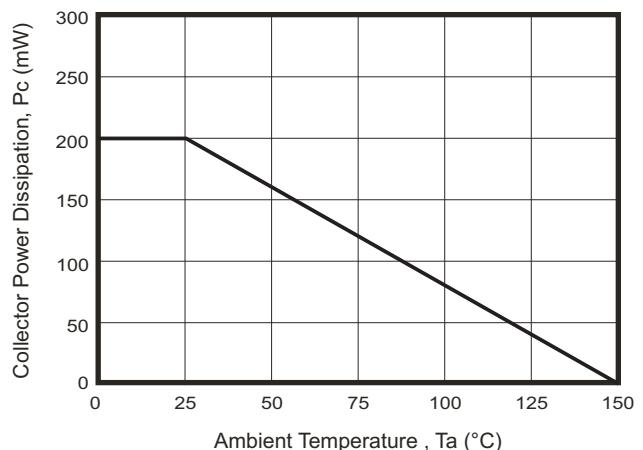

Reel Taping Specification

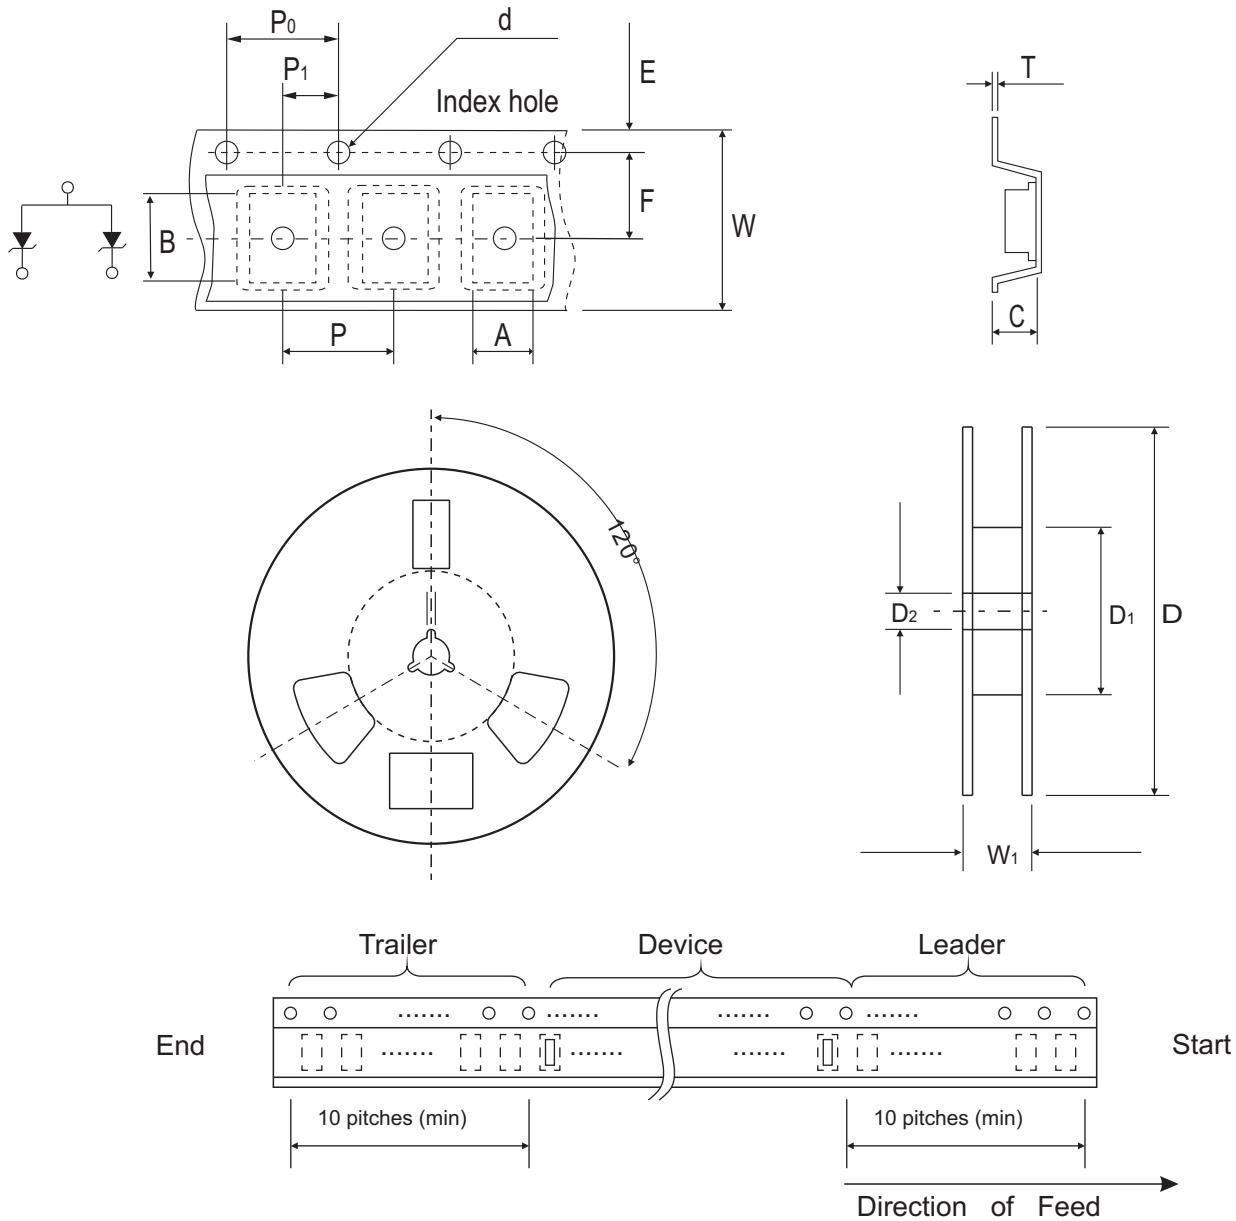


SOT-23	SYMBOL	A	B	C	d	D	D1	D2
	(mm)	3.15 ± 0.10	2.77 ± 0.10	1.22 ± 0.10	1.50 ± 0.10	178 ± 1.00	54.40 ± 0.40	13.00 ± 0.20
	(inch)	0.124 ± 0.004	0.109 ± 0.004	0.048 ± 0.004	0.059 ± 0.004	7.008 ± 0.039	2.142 ± 0.016	0.512 ± 0.008

SOT-23	SYMBOL	E	F	P	P0	P1	W	W1
	(mm)	1.75 ± 0.10	3.50 ± 0.05	4.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.10	$8.00 \pm 0.30 / -0.10$	9.50 ± 1.00
	(inch)	0.069 ± 0.004	0.138 ± 0.002	0.157 ± 0.004	0.157 ± 0.004	0.079 ± 0.004	$0.315 \pm 0.012 / -0.004$	0.374 ± 0.039

Marking Code

Code: Per A. D.


Part Number	Marking Code
MMBT3906-HF	2A

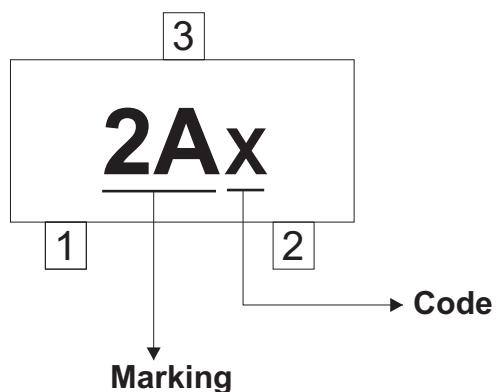

Year(Even)-Month	Code	Year(Even)-Month	Code
XXX1-01	J	XXX2-01	W
XXX1-02	O	XXX2-02	N
XXX1-03	L	XXX2-03	Y
XXX1-04	C	XXX2-04	T
XXX1-05	K	XXX2-05	R
XXX1-06	B	XXX2-06	H
XXX1-07	P	XXX2-07	A
XXX1-08	D	XXX2-08	I
XXX1-09	M	XXX2-09	U
XXX1-010	E	XXX2-010	X
XXX1-011	G	XXX2-011	Z
XXX1-012	F	XXX2-012	S

Suggested PAD Layout

SIZE	SOT-23	
	(mm)	(inch)
A	0.80	0.031
B	1.90	0.075
C	2.02	0.080
D	2.82	0.111

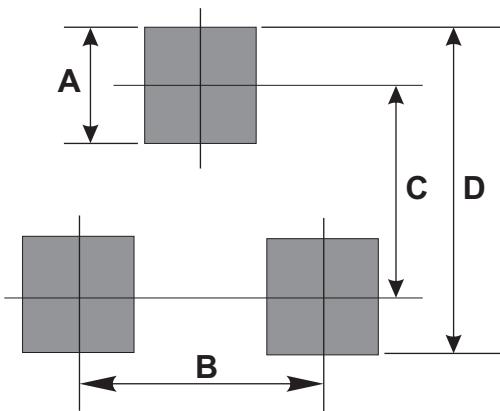

Standard Packaging

Case Type	Qty per Reel	Reel Size
	(Pcs)	(inch)
SOT-23	3000	7

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Bipolar Transistors - BJT category:

Click to view products by Comchip manufacturer:

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [BC546/116](#) [BC557/116](#) [BSW67A](#) [NTE158](#) [NTE187A](#) [NTE195A](#) [NTE2302](#) [NTE2330](#) [NTE63](#) [C4460](#)
[2SA1419T-TD-H](#) [2SA1721-O\(TE85L,F\)](#) [2SA2126-E](#) [2SB1204S-TL-E](#) [2SD2150T100R](#) [SP000011176](#) [FMMTA92QTA](#) [2N2369ADCSM](#)
[2N5769](#) [2SC2412KT146S](#) [2SC5490A-TL-H](#) [2SD1816S-TL-E](#) [2SD1816T-TL-E](#) [CMXT2207 TR](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#)
[US6T6TR](#) [NJL0281DG](#) [732314D](#) [CMXT3906 TR](#) [CPH3121-TL-E](#) [CPH6021-TL-H](#) [873787E](#) [IMZ2AT108](#) [UMX21NTR](#) [MCH6102-TL-E](#)
[NJL0302DG](#) [2N3583](#) [2SA1434-TB-E](#) [2SC3143-4-TB-E](#) [2SD1621S-TD-E](#) [NTE103](#) [30A02MH-TL-E](#) [NSV40301MZ4T1G](#) [NTE101](#) [NTE13](#)
[NTE15](#) [NTE16001](#)