

## MMBTA05-HF (NPN)

RoHS Device  
Halogen Free





### Features

- Driver transistor.
- High stability and high reliability.
- Power dissipation of 300mW.

### Mechanical data

- Case: SOT-23, molded plastic.
- Epoxy : UL 94V-0.
- Mounting position: Any.

### Circuit Diagram

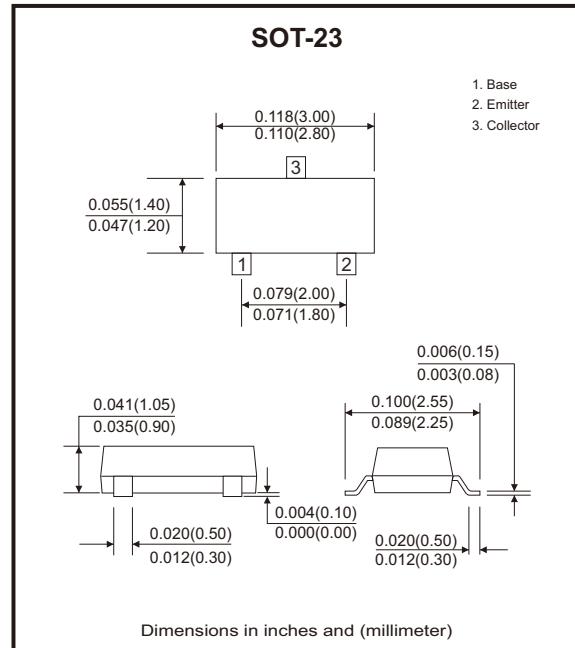

### Maximum Ratings (at TA=25°C unless otherwise noted)

Parameter	Symbol	Value	Unit
Collector-base voltage	V <sub>CBO</sub>	60	V
Collector-emitter voltage	V <sub>CEO</sub>	60	V
Emitter-base voltage	V <sub>EBO</sub>	4	V
Collector current-continuous	I <sub>C</sub>	500	mA
Collector power dissipation	P <sub>C</sub>	300	mW
Junction temperature	T <sub>J</sub>	150	°C
Storage temperature range	T <sub>STG</sub>	-55 to +150	°C
Thermal resistance, junction to ambient	R <sub>θJA</sub>	417	°C/W

# General Purpose Transistor

**Comchip**  
SMD Diode Specialist

## Electrical Characteristics (at $T_A=25^\circ\text{C}$ unless otherwise noted)

Parameter	Conditions	Symbol	Min	Max	Unit
Collector-base breakdown voltage	$I_C = 100\mu\text{A}, I_E = 0$	$V_{(\text{BR})\text{CBO}}$	60		V
Collector-emitter breakdown voltage	$I_C = 1\text{mA}, I_B = 0$	$V_{(\text{BR})\text{CEO}}$	60		V
Emitter-base breakdown voltage	$I_E = 100\mu\text{A}, I_C = 0$	$V_{(\text{BR})\text{EBO}}$	4		V
Collector cut-off current	$V_{CB} = 60\text{V}, I_E = 0$	$I_{\text{CBO}}$		100	nA
Collector cut-off current	$V_{CE} = 60\text{V}, I_B = 0$	$I_{\text{CEO}}$		100	nA
Emitter cut-off current	$V_{EB} = 3\text{V}, I_C = 0$	$I_{\text{EBO}}$		100	nA
DC current gain (Note 1)	$V_{CE} = 1\text{V}, I_C = 10\text{mA}$	$h_{FE(1)}$	100	400	
	$V_{CE} = 1\text{V}, I_C = 100\text{mA}$	$h_{FE(2)}$	100		
Collector-emitter saturation voltage (Note 1)	$I_C = 100\text{mA}, I_B = 10\text{mA}$	$V_{CE(\text{sat})}$		0.25	V
Base-emitter voltage	$V_{CE} = 1\text{V}, I_C = 100\text{mA}$	$V_{BE}$		1.20	V
Transition frequency	$V_{CE} = 2\text{V}, I_C = 10\text{mA}, f = 100\text{MHz}$	$f_T$	100		MHz

Note: 1. Pulse width  $\leq 300\mu\text{s}$ , duty cycle  $\leq 2.0\%$ .

## Rating and Characteristic Curves (MMBTA05-HF)

Fig.1 - Static Characteristic

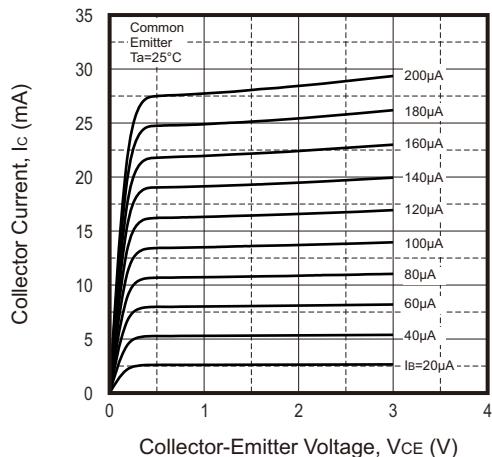


Fig.2 -  $h_{FE} - I_C$

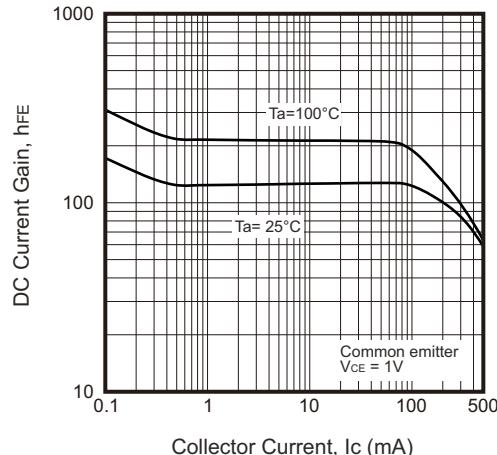


Fig.3 -  $V_{BE\text{sat}} - I_C$


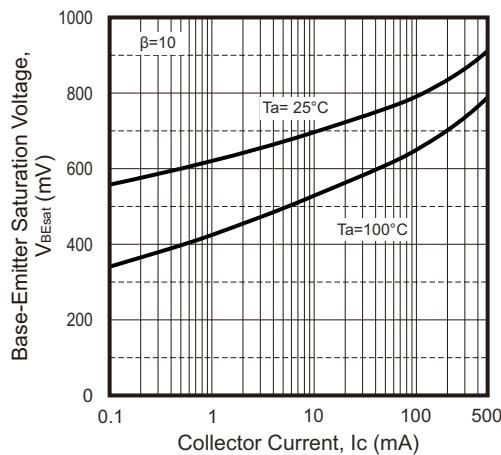


Fig.4 -  $V_{CE\text{sat}} - I_C$

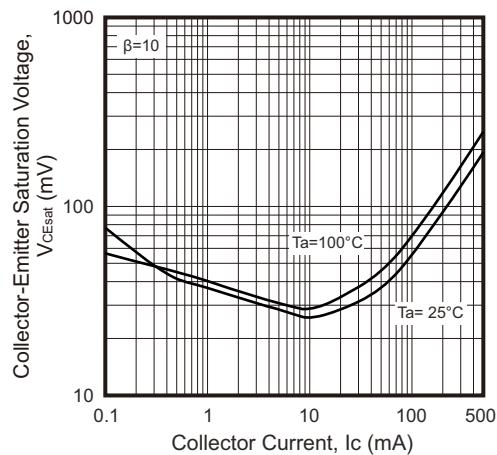

Company reserves the right to improve product design , functions and reliability without notice.

REV:A

# General Purpose Transistor

## Rating and Characteristic Curves (MMBTA05-HF)

Fig.5 -  $I_c$  —  $V_{BE}$

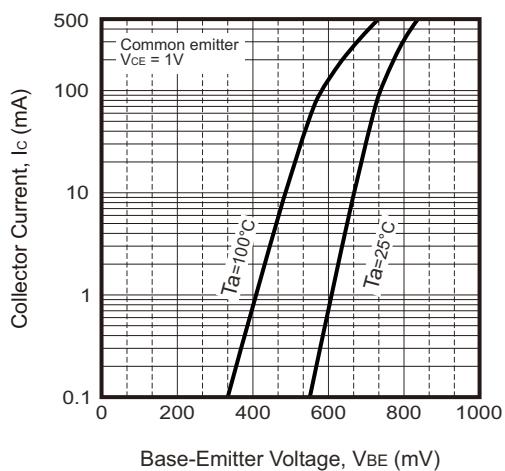


Fig.6 -  $f_T$  —  $I_c$

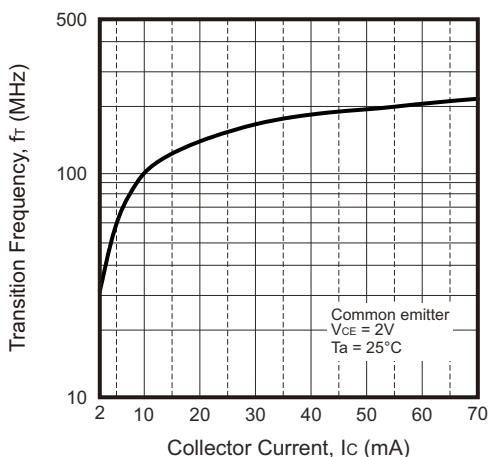


Fig.7 -  $C_{ob}/C_{ib}$  —  $V_{CB}/V_{EB}$






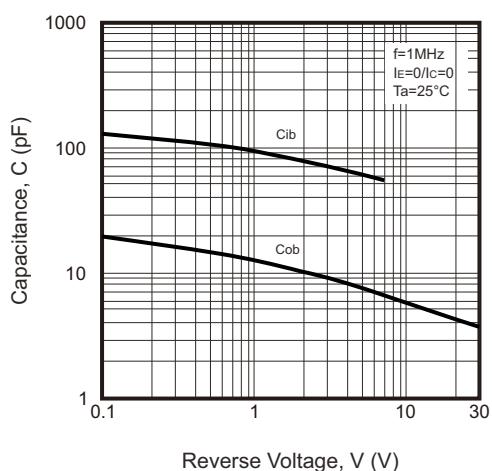


Fig.8 -  $P_c$  —  $T_a$

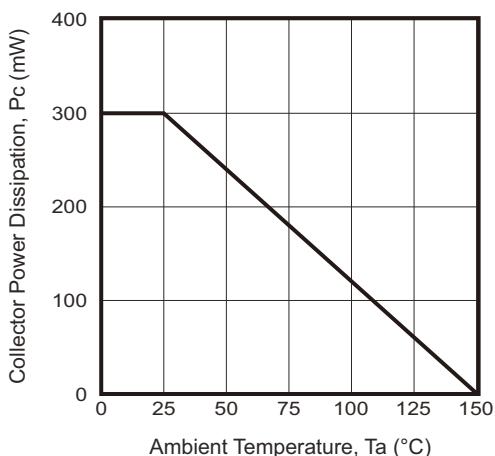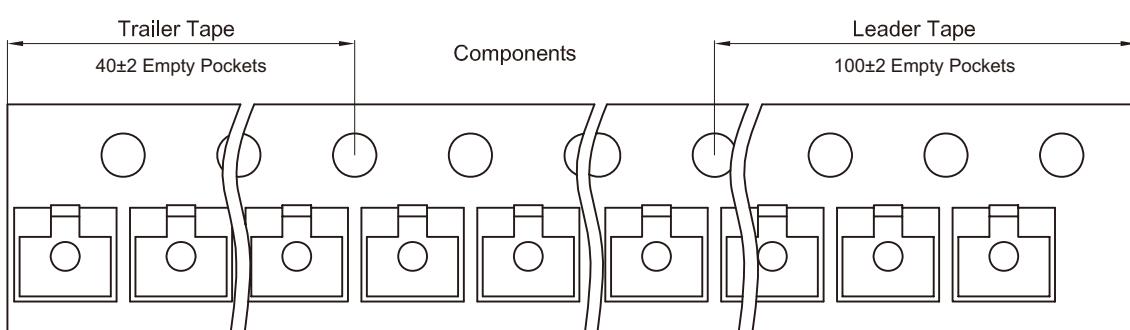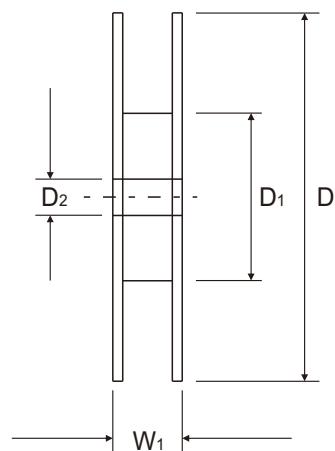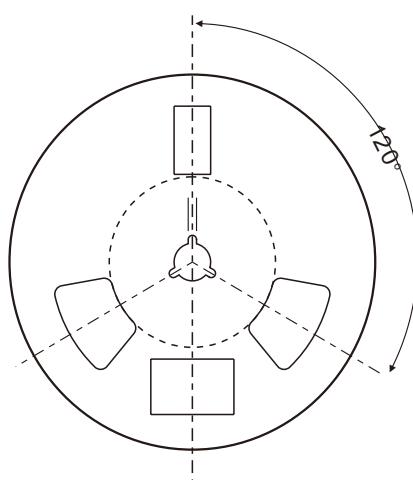

## Reel Taping Specification

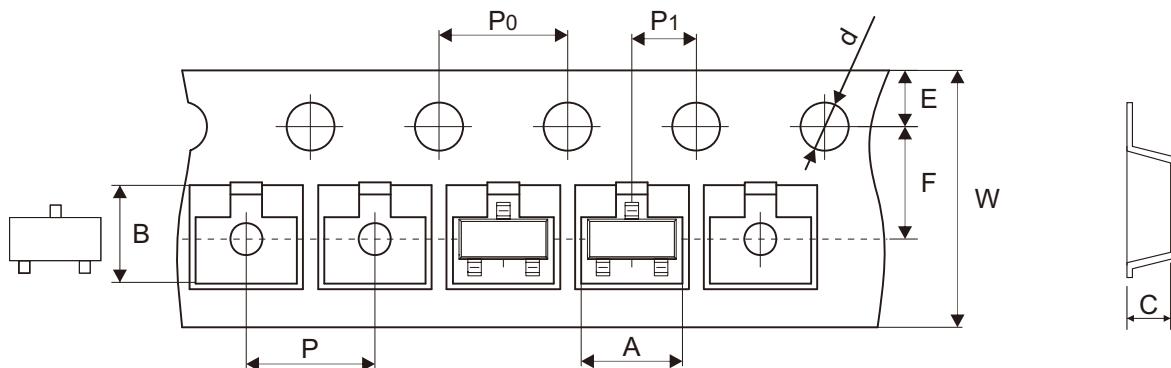

	SYMBOL	A	B	C	d	D	D1	D2
SOT-23	(mm)	$3.15 \pm 0.10$	$2.77 \pm 0.10$	$1.22 \pm 0.10$	$1.50 \pm 0.10$	$178.00 \pm 2.00$	$54.40 \pm 1.00$	$13.00 \pm 1.00$
SOT-23	(inch)	$0.124 \pm 0.004$	$0.109 \pm 0.004$	$0.048 \pm 0.004$	$0.059 \pm 0.004$	$7.008 \pm 0.079$	$2.142 \pm 0.039$	$0.512 \pm 0.039$


	SYMBOL	E	F	P	P0	P1	W	W1
SOT-23	(mm)	$1.75 \pm 0.10$	$3.50 \pm 0.10$	$4.00 \pm 0.10$	$4.00 \pm 0.10$	$2.00 \pm 0.10$	$8.00 \pm 0.10$	$12.30 \pm 1.00$
SOT-23	(inch)	$0.069 \pm 0.004$	$0.138 \pm 0.004$	$0.157 \pm 0.004$	$0.157 \pm 0.004$	$0.079 \pm 0.004$	$0.315 \pm 0.004$	$0.472 \pm 0.039$

Company reserves the right to improve product design , functions and reliability without notice.

REV:A


## Marking Code

Part Number	Marking Code
MMBTA05-HF	1H

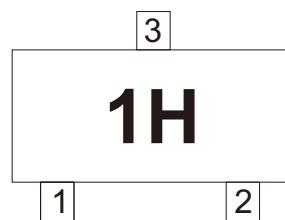

## Suggested PAD Layout

SIZE	SOT-23	
	(mm)	(inch)
A	0.90	0.035
B	0.80	0.031
C	0.95	0.037
D	2.00	0.079
E	2.90	0.114

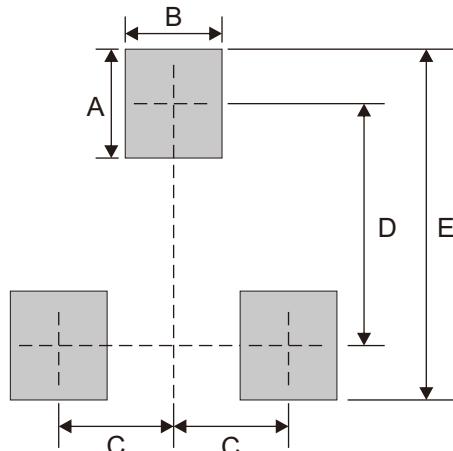

Note: 1. The pad layout is for reference purposes only.

## Standard Packaging

Case Type	REEL PACK	
	REEL (pcs)	Reel Size (inch)
SOT-23	3,000	7

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for Bipolar Transistors - BJT category:***

***Click to view products by Comchip manufacturer:***

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [BC546/116](#) [BC557/116](#) [BSW67A](#) [NTE158](#) [NTE187A](#) [NTE195A](#) [NTE2302](#) [NTE2330](#) [NTE63](#) [C4460](#)  
[2SA1419T-TD-H](#) [2SA1721-O\(TE85L,F\)](#) [2SA2126-E](#) [2SB1204S-TL-E](#) [2SD2150T100R](#) [SP000011176](#) [FMMTA92QTA](#) [2N2369ADCSM](#)  
[2N5769](#) [2SC2412KT146S](#) [2SC5490A-TL-H](#) [2SD1816S-TL-E](#) [2SD1816T-TL-E](#) [CMXT2207 TR](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#)  
[US6T6TR](#) [NJL0281DG](#) [732314D](#) [CMXT3906 TR](#) [CPH3121-TL-E](#) [CPH6021-TL-H](#) [873787E](#) [IMZ2AT108](#) [UMX21NTR](#) [MCH6102-TL-E](#)  
[NJL0302DG](#) [2N3583](#) [2SA1434-TB-E](#) [2SC3143-4-TB-E](#) [2SD1621S-TD-E](#) [NTE103](#) [30A02MH-TL-E](#) [NSV40301MZ4T1G](#) [NTE101](#) [NTE13](#)  
[NTE15](#) [NTE16001](#)