


RS501-G thru RS507-G

"-G" : RoHS Device

REVERSE VOLTAGE - 50 to 1000 Volts
FORWARD CURRENT - 5.0 Amperes

FEATURES

- Plastic material used carries UL recognition 94V-0
- High surge current capability
- Ideal for printed circuit board
- Typical IR less than 1mA
- Built-in printed board stand offs
- High temperature soldering guaranteed:
250°C for 5 seconds

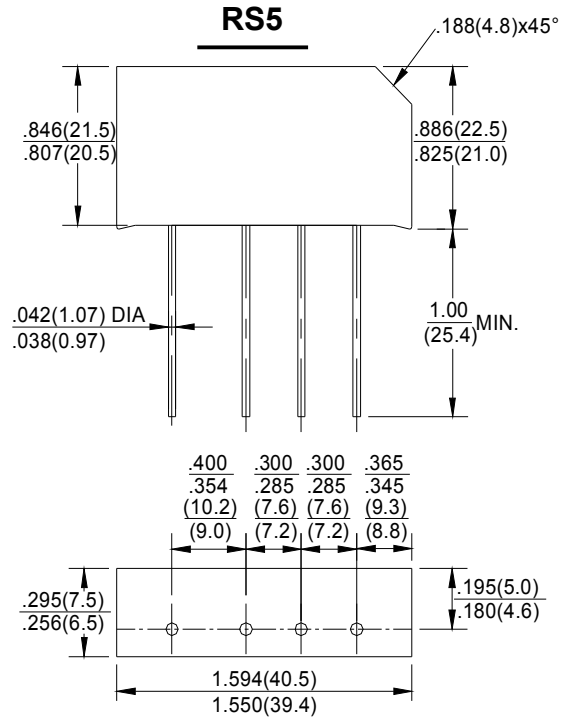

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

resistive or inductive load at 50HZ or 60HZ.

CHARACTERISTICS	SYMBOL	RS501	RS502	RS503	RS504	RS505	RS506	RS507	UNIT
Maximum Recurrent Peak Reverse Voltage	V _{RM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V _{RMS}	35	70	140	280	420	400	700	V
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	V
Maximum Repetitive Peak Reverse Voltage (Note1)	V _R RM	100	190	300	600	900	1200	1500	V
Maximum Average Forward Output Current I _{FAVM} natural cooling, T _A =45°C	I(A)								A
C-Load		3.3							
R+L-Load		4.0							
on chassis=31in ² , 200cm ² , T _A =45°C									
C-Load		5.0							
R+L-Load		6.0							
Maximum Repetitive Peak Forward Surge Current I _{FSM}	APK	30							A
Peak Forward Surge Current Single @T _J =25°C	I _{FSM}	250							APK
Sine-Wave on Rated Load (JEDEC Method) @T _J =150°C		200							
I ² t Rating for Fusing @T _J =25°C	I ² t	312							A ² S
(t<8.3ms) @T _J =150°C		200							
Maximum Series Resistance at V _{RMS}		0.15	0.3	0.6	1.2	1.8			OHM
Maximum Reservoir Capacitor		10000	5000	5000	2500	1000			uF
Maximum Reverse Current at @T _J =25°C	I _R	10.0							uA
Rated Repetitive Peak Voltage @T _J =150°C		6.0							
Maximum instantaneous Forward Drop per Element at 5.0A	V _F	1.0							V
Operating and Storage Temperature Range	T _J , T _{STG}	-55 to +125							°C

NOTES:1.Valid for each bridge element.

RATINGS AND CHARACTERISTIC CURVES RS501-G thru RS507-G

FIG.1-DERATING CURVE FOR OUTPUT RECTIFIED CURRENT

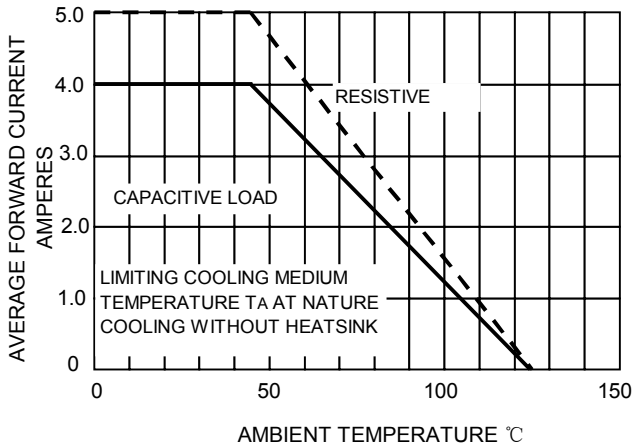


FIG.2- DERATING CURVE FOR OUTPUT RECTIFIED CURRENT

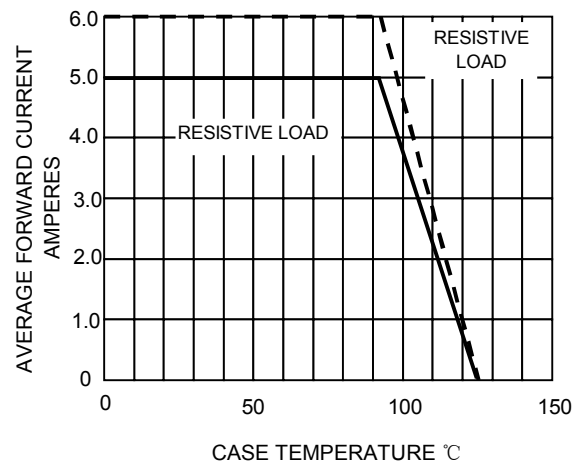


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTIC PER BRIDGE ELEMENT

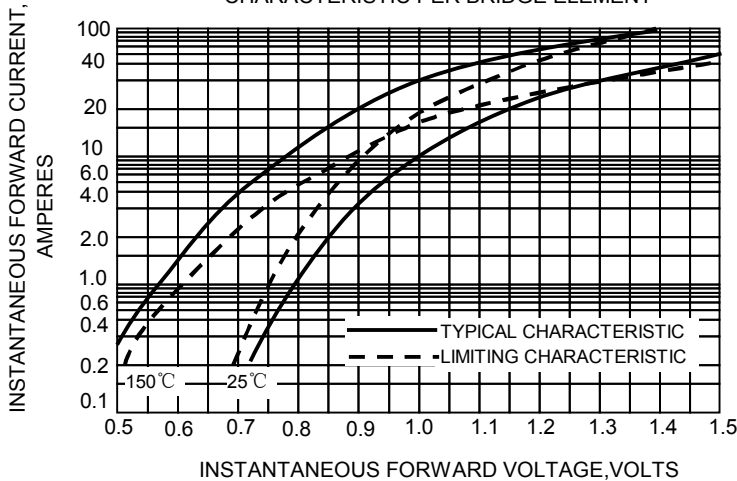


FIG.4-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

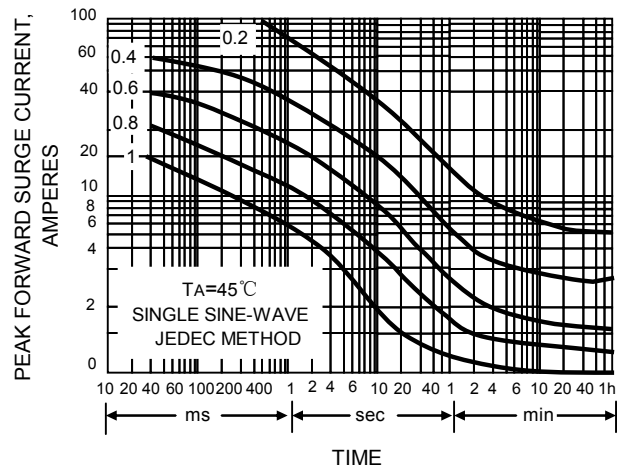


FIG.5-MAXIMUM TOTAL BRIDGE POWER DISSIPATION


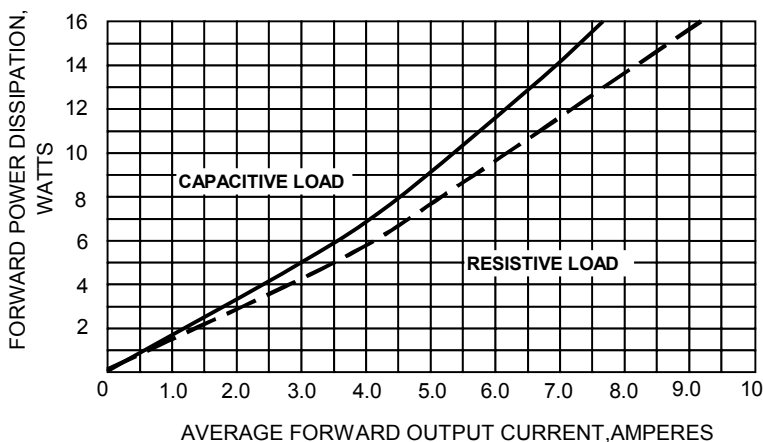


FIG.6-MEAN AVERAGE FORWARD CURRENT CASE TEMPERATURE

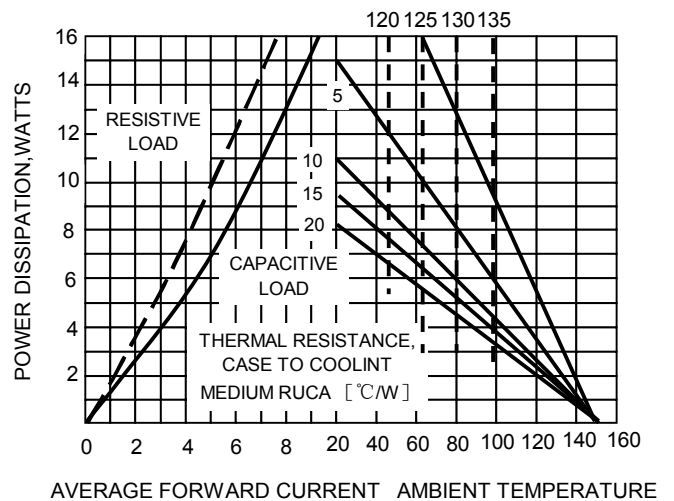

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bridge Rectifiers](#) category:

Click to view products by [Comchip](#) manufacturer:

Other Similar products are found below :

[MB2510](#) [MB252](#) [MB356G](#) [MB358G](#) [90MT160KPBF](#) [GBJ1504-BP](#) [GBU15J-BP](#) [GBU15K-BP](#) [GBU4A-BP](#) [GBU4D-BP](#) [GBU6B-E3/45](#)
[GSIB680-E3/45](#) [DB101-BP](#) [DF01](#) [DF10SA-E345](#) [KBPC50-10S](#) [RS405GL-BP](#) [G5SBA60-E3/51](#) [GBU10J-BP](#) [GBU6M](#) [GBU8D-BP](#)
[GBU8J-BP](#) [GSIB1520-E3/45](#) [36MB140A](#) [TB102M](#) [MB1510](#) [MB258](#) [MB6M-G](#) [MB86](#) [TL401G](#) [MDA920A2](#) [TU602](#) [TU810](#) [BR1005-BP](#)
[BR101-BP](#) [BR84DTP204](#) [BU2008-E3/51](#) [36MB100A](#) [KBPC10/15/2501WP](#) [KBPC25-02](#) [VS-2KBB60](#) [DF06SA-E345](#) [DF1510S](#) [VS-](#)
[40MT160PAPBF](#) [W02M](#) [GBL02-E3/45](#) [GBU4G-BP](#) [GBJ2506-BP](#) [GBU6B-E3/51](#) [GSIB15A80-E3/45](#)