


SS8050-HF (NPN)



RoHS Device
Halogen Free



Mechanical Data

- Case: SOT-23, molded plastic.
- Mounting position: Any.

Circuit Diagram

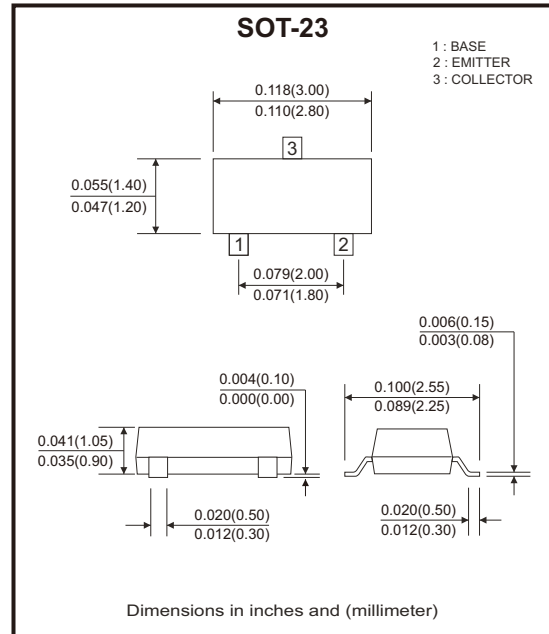

Maximum Ratings (at $T_A=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Collector-Base voltage	V_{CB0}	40	V
Collector-Emitter voltage	V_{CE0}	25	V
Emitter-Base voltage	V_{EB0}	5	V
Collector current	I_C	1.5	A
Collector power dissipation	P_C	300	mW
Thermal resistance from junction to ambient	$R_{\theta JA}$	417	$^\circ\text{C/W}$
Operation junction and storage temperature range	T_J, T_{STG}	-55 to +150	$^\circ\text{C}$

Electrical Characteristics (at $T_A=25^\circ\text{C}$ unless otherwise noted)

Parameter	Conditions	Symbol	Min	Typ	Max	Unit
Collector-Base breakdown voltage	$I_C=100\mu\text{A}, I_E=0$	$V_{(BR)CBO}$	40			V
Collector-Emitter breakdown voltage	$I_C=0.1\text{mA}, I_B=0$	$V_{(BR)CEO}$	25			V
Emitter-Base breakdown voltage	$I_E=100\mu\text{A}, I_C=0$	$V_{(BR)EBO}$	5			V
Collector cut-off current	$V_{CB}=40\text{V}, I_E=0$	I_{CBO}			0.1	μA
Collector cut-off current	$V_{CE}=20\text{V}, I_E=0$	I_{CEO}			0.1	μA
Emitter cut-off current	$V_{EB}=5\text{V}, I_C=0$	I_{EBO}			0.1	μA
DC current gain	$V_{CE}=1\text{V}, I_C=100\text{mA}$	$h_{FE(1)}$	200		350	
	$V_{CE}=1\text{V}, I_C=800\text{mA}$	$h_{FE(2)}$	40			
Collector-Emitter saturation voltage	$I_C=800\text{mA}, I_B=80\text{mA}$	$V_{CE(sat)}$			0.5	V
Base-Emitter saturation voltage	$I_C=800\text{mA}, I_B=80\text{mA}$	$V_{BE(sat)}$			1.2	V
Transition frequency	$V_{CE}=10\text{V}, I_C=50\text{mA}, f=30\text{MHz}$	f_T	100			MHz

Rating and Characteristic Curves (SS8050-HF)

Fig.1 - Static Characteristic

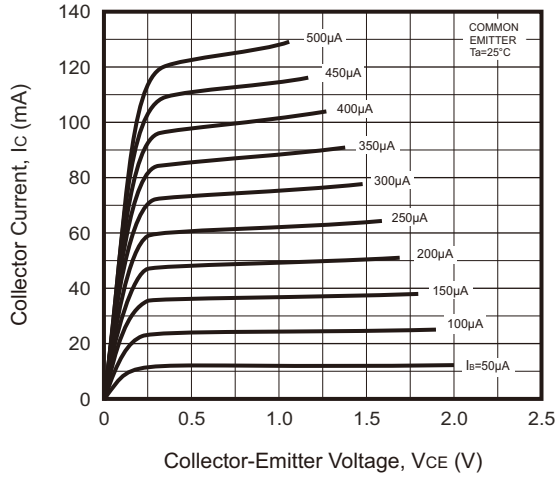


Fig.2 - $h_{FE} - I_c$

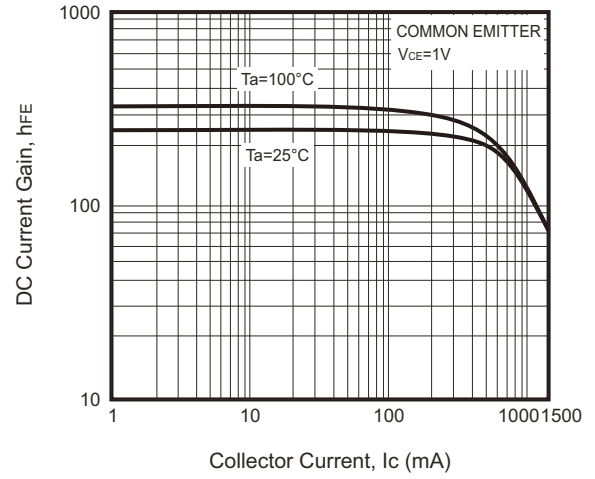


Fig.3 - $V_{CEsat} - I_c$

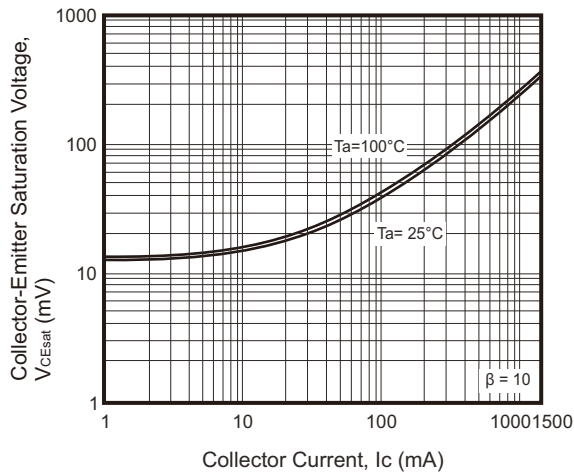


Fig.4 - $V_{BEsat} - I_c$

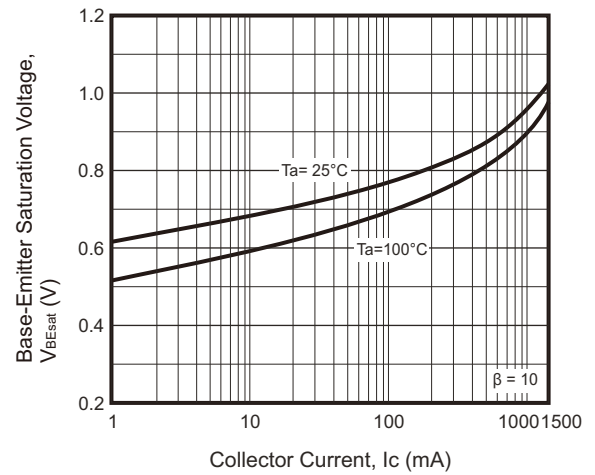


Fig.5 - $V_{BE} - I_c$


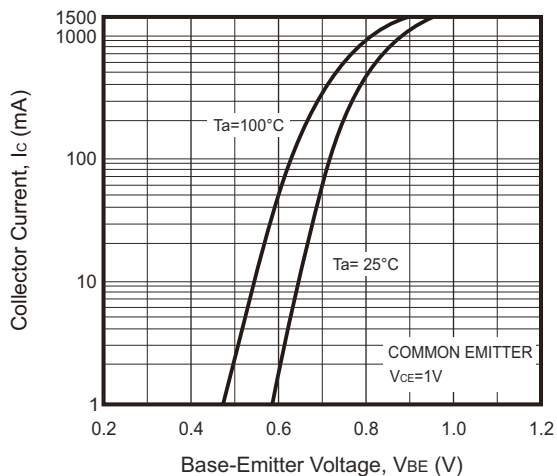


Fig.6 - $C_{ob}/C_{ib} - V_{CB}/V_{EB}$

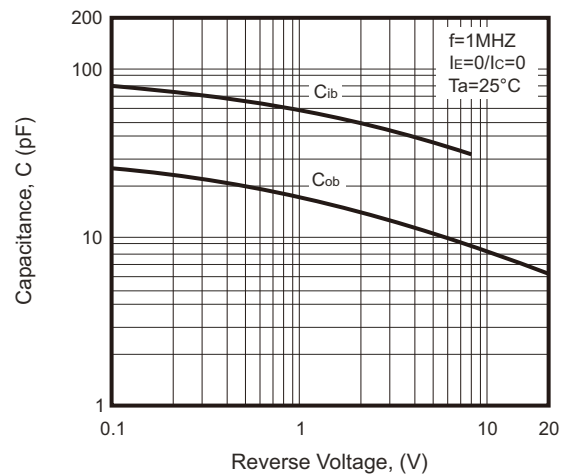

Rating and Characteristic Curves (SS8050-HF)

Fig.7 - f_T — I_C






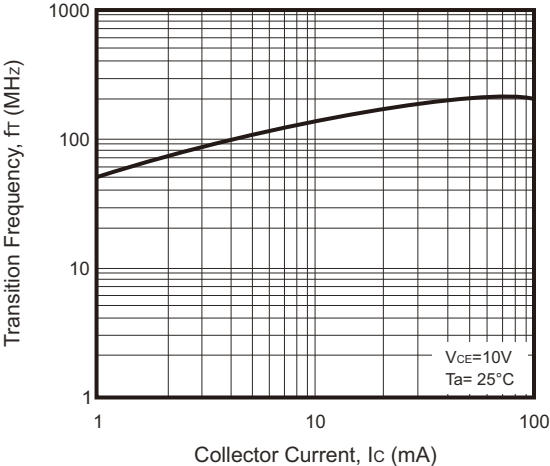


Fig.8 - P_C — T_A

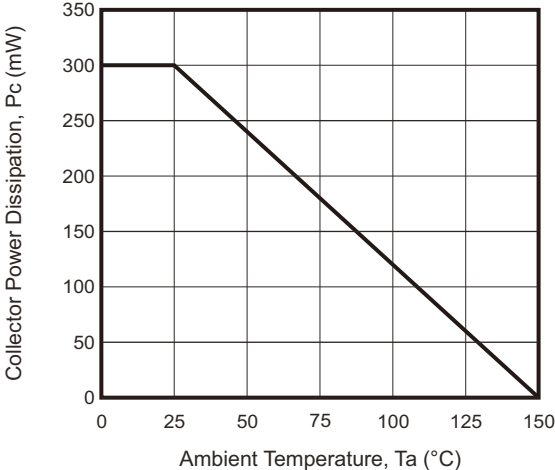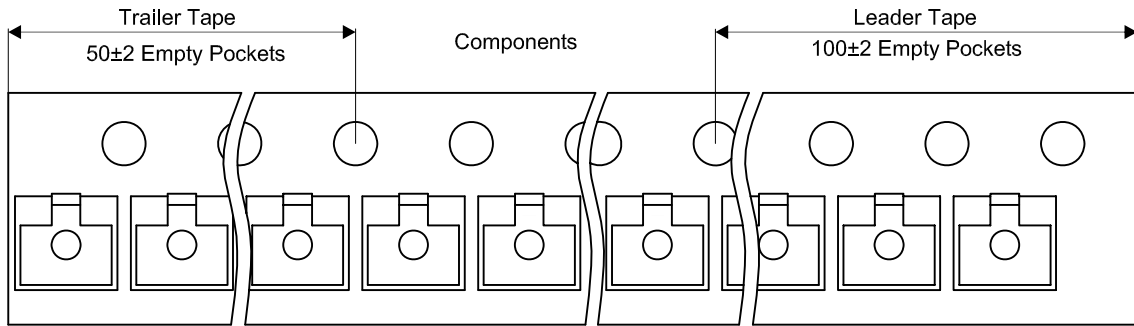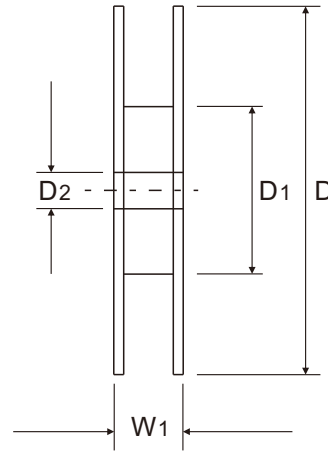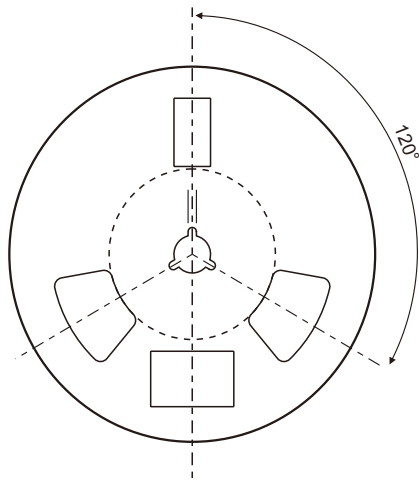

Reel Taping Specification

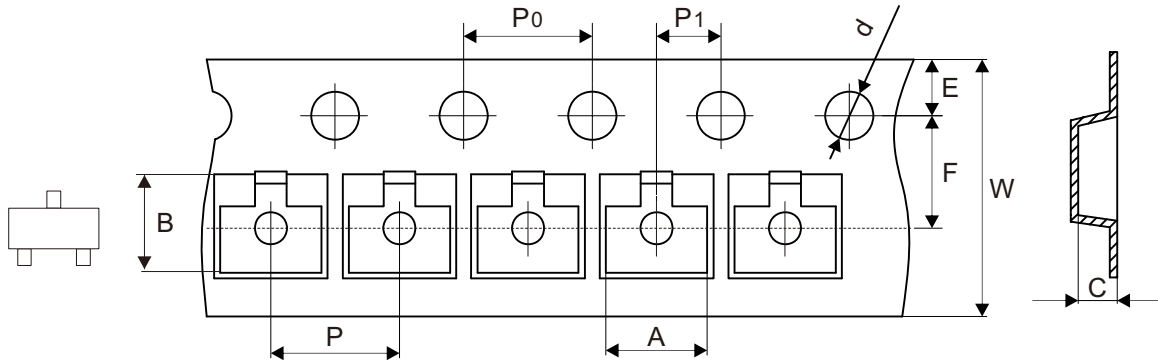


SOT-23	SYMBOL	A	B	C	d	D	D1	D2
	(mm)	3.15 ± 0.10	2.77 ± 0.10	1.22 ± 0.10	1.50 ± 0.10	178.00 ± 2.00	54.40 ± 1.00	13.00 ± 1.00
	(inch)	0.124 ± 0.004	0.109 ± 0.004	0.048 ± 0.004	0.059 ± 0.004	7.008 ± 0.079	2.142 ± 0.039	0.512 ± 0.039

SOT-23	SYMBOL	E	F	P	P0	P1	W	W1
	(mm)	1.75 ± 0.10	3.50 ± 0.10	4.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.10	8.00 + 0.30 - 0.10	12.30 ± 1.00
	(inch)	0.069 ± 0.004	0.138 ± 0.004	0.157 ± 0.004	0.157 ± 0.004	0.079 ± 0.004	0.315 + 0.012 - 0.004	0.484 ± 0.039

Marking Code


Part Number	Marking Code
SS8050-HF	Y1



Solid dot = Control code

Suggested P.C.B. PAD Layout

SIZE	SOT-23	
	(mm)	(inch)
A	0.90	0.035
B	0.80	0.031
C	0.95	0.037
D	2.00	0.079
E	2.90	0.114

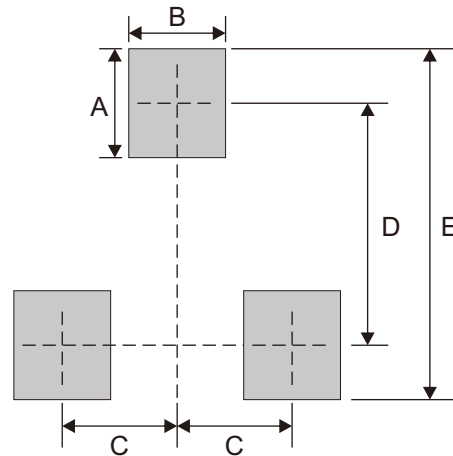

Standard Packaging

Case Type	REEL PACK	
	REEL (pcs)	Reel Size (inch)
SOT-23	3,000	7

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bipolar Transistors - BJT category](#):

Click to view products by [Comchip manufacturer](#):

Other Similar products are found below :

[BC559C](#) [MCH4017-TL-H](#) [MMBT-2369-TR](#) [BC546/116](#) [NJVMJD148T4G](#) [NTE16](#) [NTE195A](#) [IMX9T110](#) [2N4401-A](#) [2N6728](#) [2SA1419T-TD-H](#) [2SB1204S-TL-E](#) [2SC5488A-TL-H](#) [FMC5AT148](#) [2N2369ADCSM](#) [2N2907A](#) [2N3904-NS](#) [2N5769](#) [2SC4618TLN](#) [CPH6501-TL-E](#) [BC856BW-13-F](#) [US6T6TR](#) [BAX18/A52R](#) [BC556/112](#) [IMZ2AT108](#) [MMST8098T146](#) [MCH6102-TL-E](#) [BC846B-13-F](#) [2N3879](#) [30A02MH-TL-E](#) [NTE13](#) [NTE282](#) [NTE323](#) [NTE350](#) [NTE81](#) [JANTX2N2920L](#) [JANSR2N2907AUB](#) [CMLT3946EG TR](#) [SNSS40600CF8T1G](#) [CMLT3906EG TR](#) [GRP-DATA-JANS2N2907AUB](#) [GRP-DATA-JANS2N2222AUA](#) [MMDT3946FL3-7](#) [2N4240](#) [JANS2N3019](#) [MSB30KH-13](#) [2N2221AUB](#) [2SD1815T-TL-E](#) [2N6678](#) [2N2907Ae4](#)