

### FEATURES AND BENEFITS

Small Size of 2" x 4" x 1.3"	Level V Efficiency Compliant
Universal Input 90-264VAC	-40°C Start Up
75W Convection Cooled/115 Watts with 200 LFM	-20°C to 70°C Operating Temperature Range
Meets IEC61000-3-2 Class C for Less than 1 Watt to Full Power	3 Years Warranty
Meets EN55015 Conducted EMI	Optional LED Indicator for Power-ON
Approved to UL/CSA/IEC/EN60950-1, 2 <sup>nd</sup> Edition	



### MODEL SELECTION

Model Number	Volts	Output Current Convection Cooled	Output Current Forced air (200 LFM) (Total Power)	Ripple & Noise*	Total Regulation	OVP Threshold
LB115S12K	12V	6.25 A	9.00A (108 Watts)	0.5%RMS, 1.5% pk-pk	±2%	14.0 ± 1.1V
LB115S24K	24V	3.13A	4.58A (110 Watts)	0.5%RMS, 1% pk-pk	±2%	28.0 ± 2.5V
LB115S48K	48V	1.56A	2.40A (115 Watts)	0.5%RMS, 1% pk-pk	±2%	55.0 ± 4.0V
LB115S56K	56V	1.34A	2.05A (115 Watts)	0.5%RMS, 1% pk-pk	±2%	63.0 ± 4.0V

Note: \* At -20°C, the noise and ripple is 2% of the output.

### INPUT

AC Input Voltage	90-264VAC, Single phase	
AC Input Frequency	47-63Hz	
AC Input Current	115VAC: 2A, 230VAC: 1A	
Inrush Current	65A maximum @ 25C	
Earth Leakage Current (Input-Earth)	<350uA@264VAC, 60 Hz input, NC	
Input Fuse	F1:4A, 250VAC	Fuse provided on all models

### EFFICIENCY

Model Number	Typical	Measured @ 25°C
LB115S12K	89% @ 230VAC, Full load	86.5% @ 115VAC, Full load
LB115S24K	89% @ 230VAC, Full load	87% @ 115VAC, Full load
LB115S48K	90% @ 230VAC, Full load	88% @ 115VAC, Full load
LB115S56K	90% @ 230VAC, Full load	88% @ 115VAC, Full load



### OUTPUT

Hold-Up Time	12ms minimum from loss of AC input at 115VAC	
Turn On Time	<2 seconds @115VAC (<3s for 12V output)	<5 seconds @115VAC for -20°C ambient
Output Power	Max of 75 Watts for convection cooled Max of 115 Watts for fan cooled (48 & 56V models)	Maximum 108 Watts for 12V output -20°C to 50°C ambient
Ripple and Noise	0.5% RMS, 1% pk-pk for all models	20 MHz bandwidth, Differential mode Measured with noise probe directly across output terminals and load terminated with 0.1µF ceramic and 10µF low ESR capacitors
Transient Response	500µs typ. response time for return to within 0.5% of final value for a 50% load change, $\Delta i/\Delta t < 0.2A/\mu s$ Max voltage deviation is 3.5%	Measured @ 25°C
Minimum Load	No minimum load is required	
Total Regulation	±2% for all models	Total regulation is the maximum deviation from nominal voltage for all loading conditions
Cooling	Convection Forced air of 200 LFM	
Overshoot	5% overshoot at turn-on, 5% overshoot at turn-off, under all conditions	6% for 12V output

### ENVIRONMENT

Operating Temperature	-20°C to +70°C	-40°C startup guaranteed (full load) For 12V output, the maximum load is 75%
Temperature Derating	60% derating at 70°C	
Storage Temperature	-40°C to +85°C	
Cooling	Convection/Airflow	75 Watts convection
Altitude	Operating: 500 to 3,000 meter Non-operating: 500 to 40,000 ft	
Relative Humidity	5% to 95%, Non-condensing	
Vibration	Random vibration per MIL-STD-810E, Method 514.4, Cat. 1, Figure 514.4-1, 1 hr in each of three axes	

### PROTECTION

Overtemperature Protection	Automatic power shutdown	Thermistor temperature is 130°C
Overload Protection	120% - 180% of rated output current value, Hiccup mode	For 12V output, it is 110 to 180%
Short Circuit Protection	Short across the output terminals will not cause damage to the unit. Hiccup mode	
Overvoltage Protection	OVP firing reduces output voltage to <50% of nominal in <50ms. See chart for trip range	



### SAFETY

UL	EN/CSA/UL/IEC 60950-1, 2 <sup>nd</sup> edition
CSA	CSA 60950-1, 2 <sup>nd</sup>
Demko	EN 60950-1, 2 <sup>nd</sup>
CB Report	IEC 60950-1, 2 <sup>nd</sup>
Isolation Type	Double/Reinforced between input and output
Shock	Non-operating: Half-sine, 40 gpk, 10ms, 3 axes, 6 shocks total

### ISOLATION SPECIFICATIONS

Insulation Safety Rating	Input to Ground	Basic insulation
	Input to Output	Double/Reinforced
Electric Strength Test Voltage	Input to Ground	1,900VAC
	Input to Output	3,000VAC
	Output to Ground	500VAC

### RELIABILITY

MTBF	574K hours, 25°C ambient, Full load	Calculation is done based on Telcordia. Reports for each model is available
Warranty	3 years	Limited
HALT Data	Per SL Power halt procedure	Report is available

### EMI/EMC COMPLIANCE


Conducted Emissions	EN55011/22 Class B; FCC Part 15	Also meets EN55015 Class B
Radiated Emissions	EN55011/22 Class A; FCC Part 15	
Harmonic Current Emissions	EN61000-3-2, Class A, B, C & D	Meets Class C from 5 to 115 Watts. This is based on limits set @ 115 Watts
Voltage Fluctuations & Flicker	EN61000-3-3	
Static Discharge Immunity	EN61000-4-2, Level 4: 6kV contact, 8kV air, Criteria A	Performance criteria are defined as following: A – Normal performance during and after the test B – Temporary degradation, self-recoverable C – Temporary degradation, operator intervention required to recover the operation
RF Field Susceptibility	EN61000-4-3, Level 3 (3V/m), Criteria A	
Fast Transients/Bursts	EN61000-4-4, Level 3 (PS: 2kV-40A, other lines 1kV-20A), Criteria A	
Surge Susceptibility	EN61000-4-5, Installation Class 3 (1kV diff. mode, 2kV common mode), Criteria A	
Conducted RF Susceptibility	EN61000-4-6, Level 3 (3Vrms), Criteria A	
Power Frequency Magnetic Field Test	EN61000-4-8, Level 3 (3A/m), Criteria A	
Voltage Sags & Surges	EN61000-4-11, 95% dip/0.5 cycle (Criteria A), 60%/5 cycles (Criteria B), 30%/25 cycles (Criteria A) Loading is 70% of 100 Watts with 100VAC input	

Note: 1. Specifications subject to change without notice.

2. Specifications are for convection rating at factory settings with 115Vac input and 25°C ambient unless otherwise stated.



### MECHANICAL DRAWING

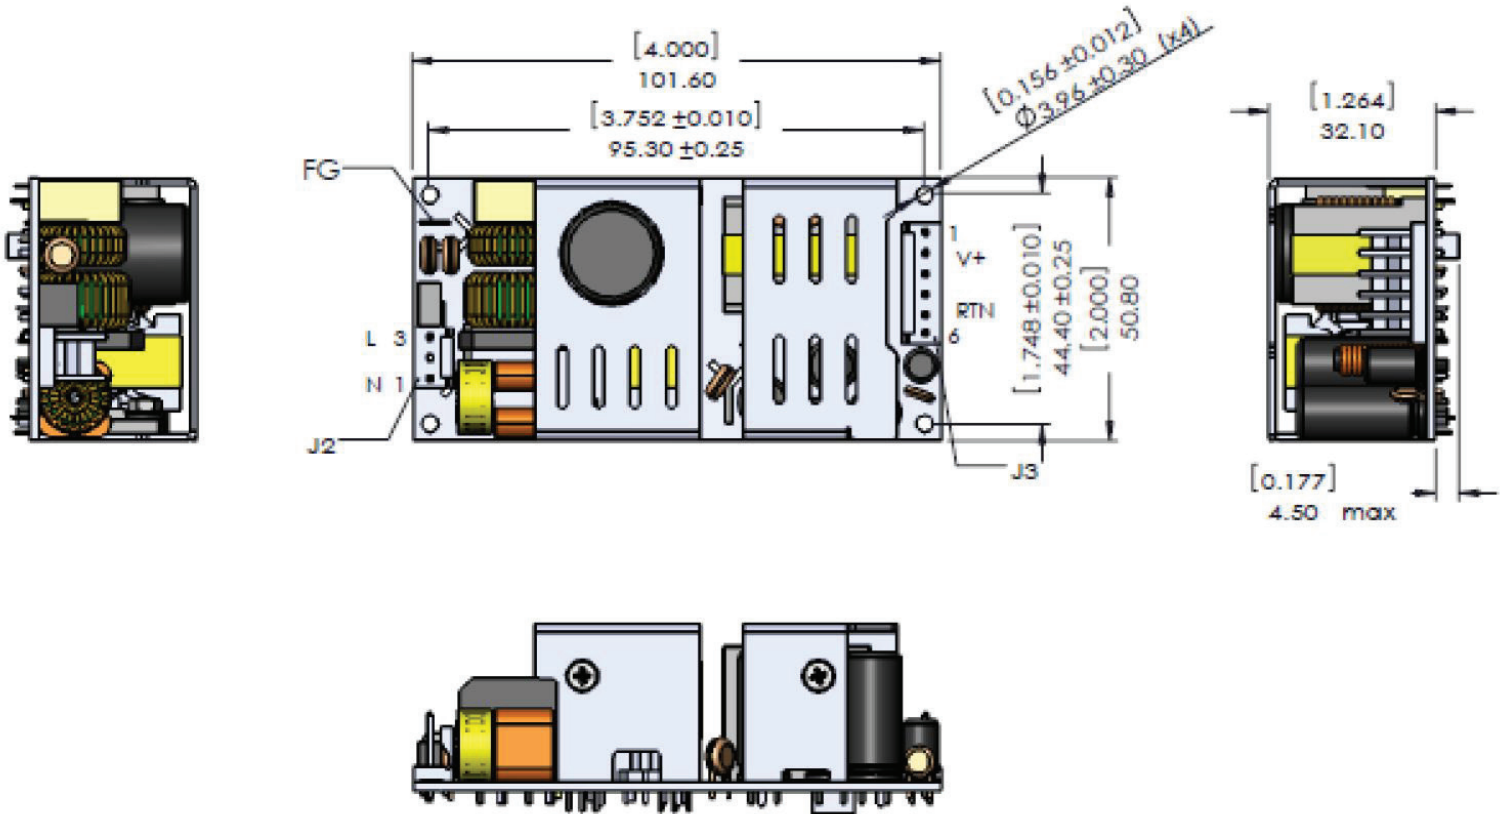

### CONNECTOR INFORMATION


Input Connector J2	DC Output Connector J3	Ground (FG) J1
PIN 1) AC NEUTRAL PIN 2) EMPTY PIN 3) AC LINE	PIN 1) + V <sub>out</sub> PIN 2) + V <sub>out</sub> PIN 3) + V <sub>out</sub> PIN 4) - V <sub>out</sub> PIN 5) - V <sub>out</sub> PIN 6) - V <sub>out</sub>	<div style="border: 1px solid red; padding: 5px;">             19-30258-0187 (Keystone 1285)              (Zierick 895)(.187*0.020)           </div>
Mating Connector: Tyco/AMP 640250-3 Terminals: 3-640252-1	Mating Connector: AMP 640250-6 Terminals: 3-640252-1	Mating Connector Molex 190020005

- Notes :**
- All dimensions in inches (mm) undefined tolerance is ±.02" (0.5mm).
  - Mounting holes should be connected together for EMI purpose.
  - FG is safety ground connection.
  - This power supply requires mounting on metal standoffs 0.20" (5mm) min. in height.




## CHARACTERISTIC CURVES

### OUTPUT POWER VS. TEMPERATURE

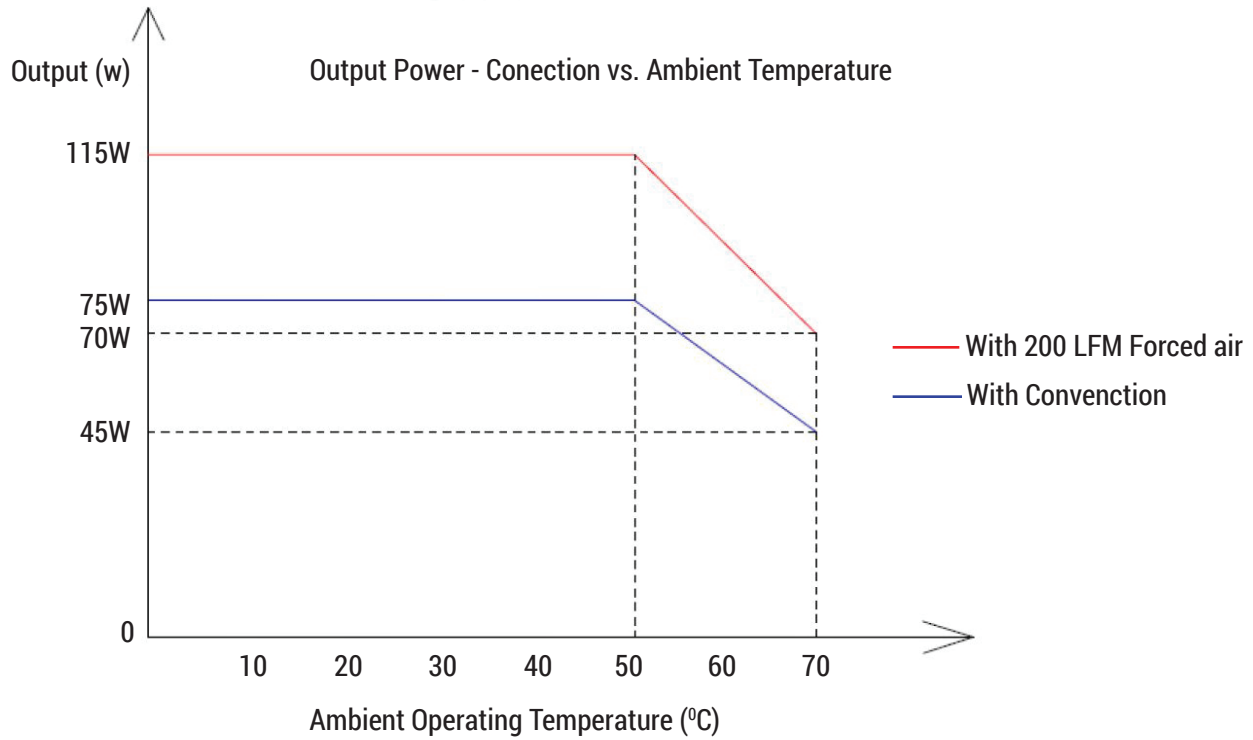


### EFFICIENCY VS. LOADING

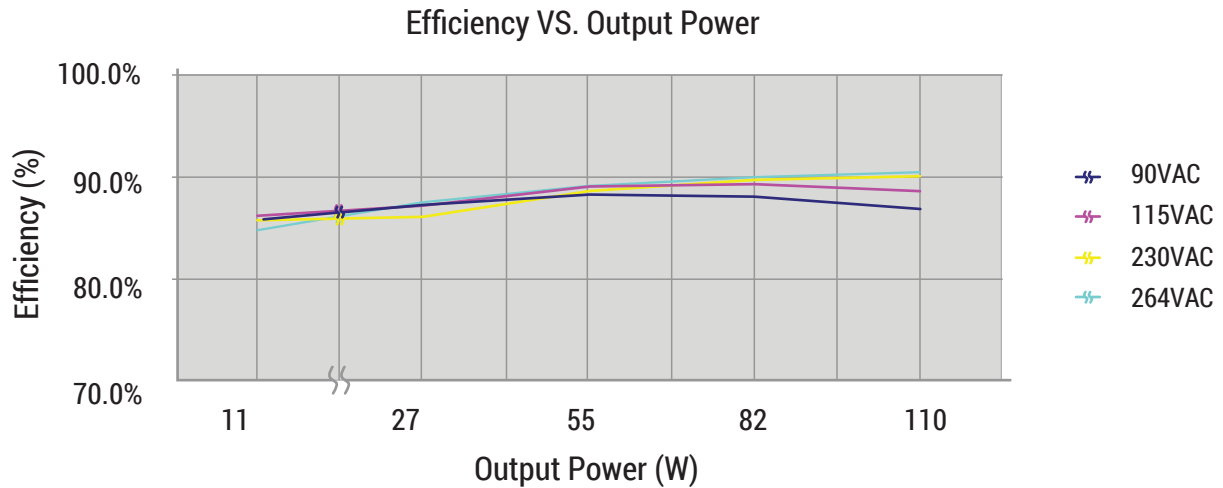




**RIPPLE & NOISE**

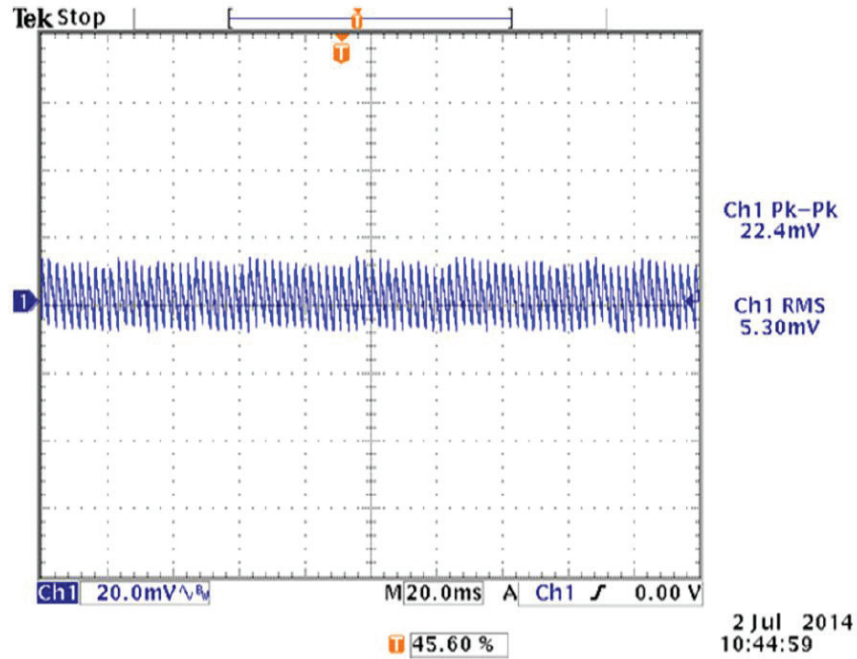

To verify that the output ripple and noise does not exceed the level specified in the product specification, measured using a scope probe socket with 0.1uF ceramic and a 10uF electrolytic capacitor connected in parallel across it, 20MHz BW.


**OUTPUT OVERLOAD CHARACTERISTIC**

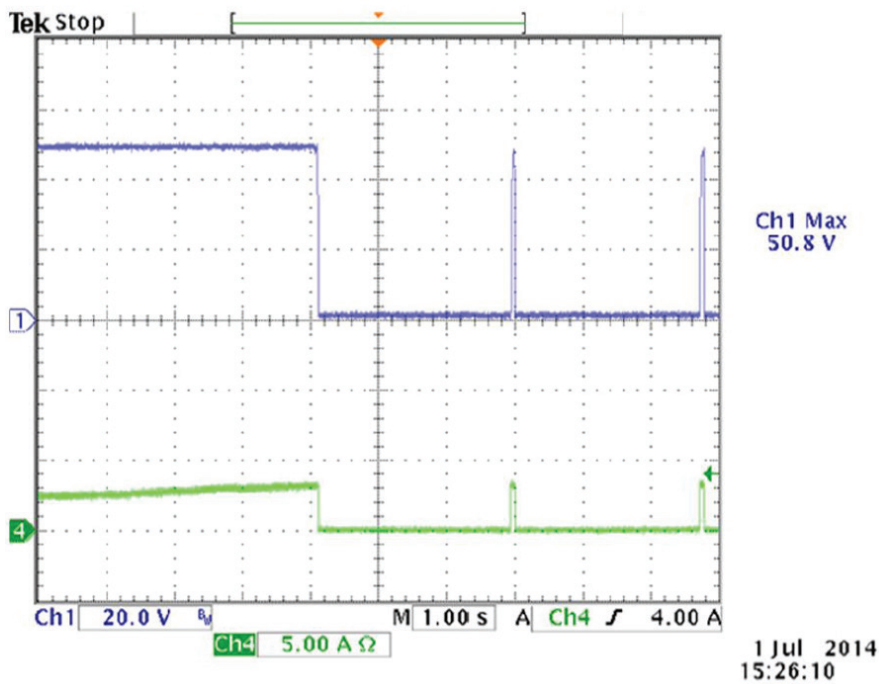






## OVERVOLTAGE PROTECTION

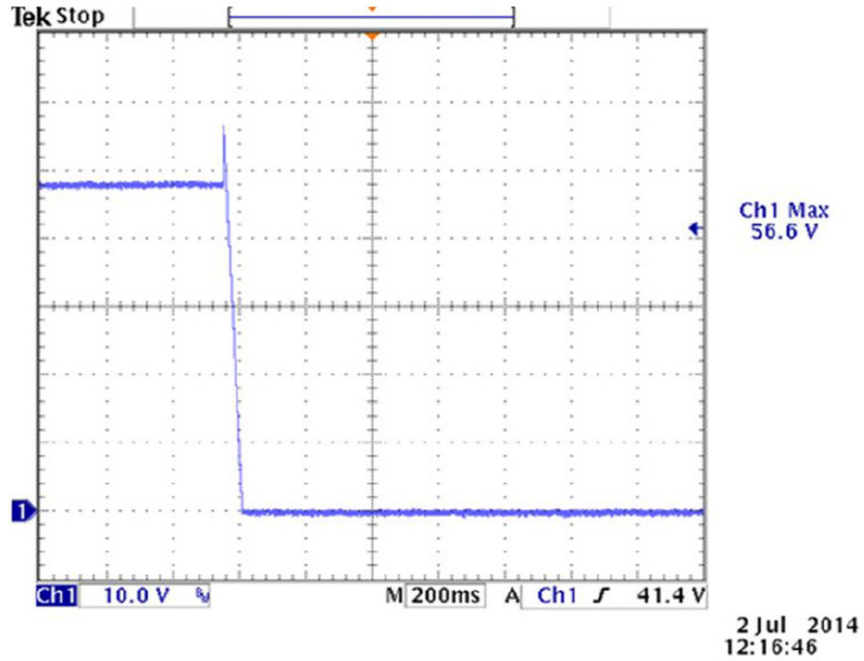


## TURN - ON TIME

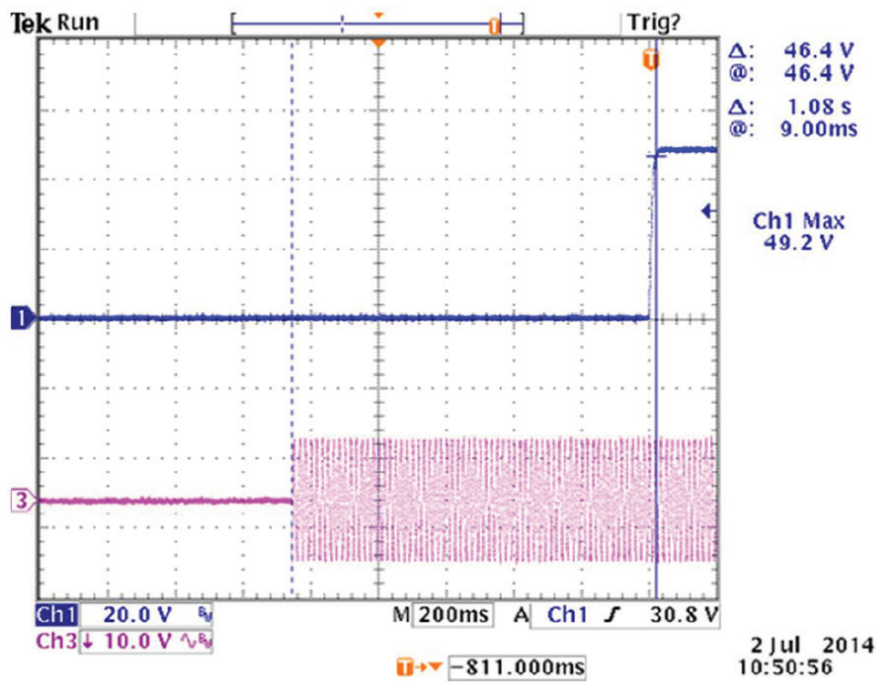



## HOLD UP TIME

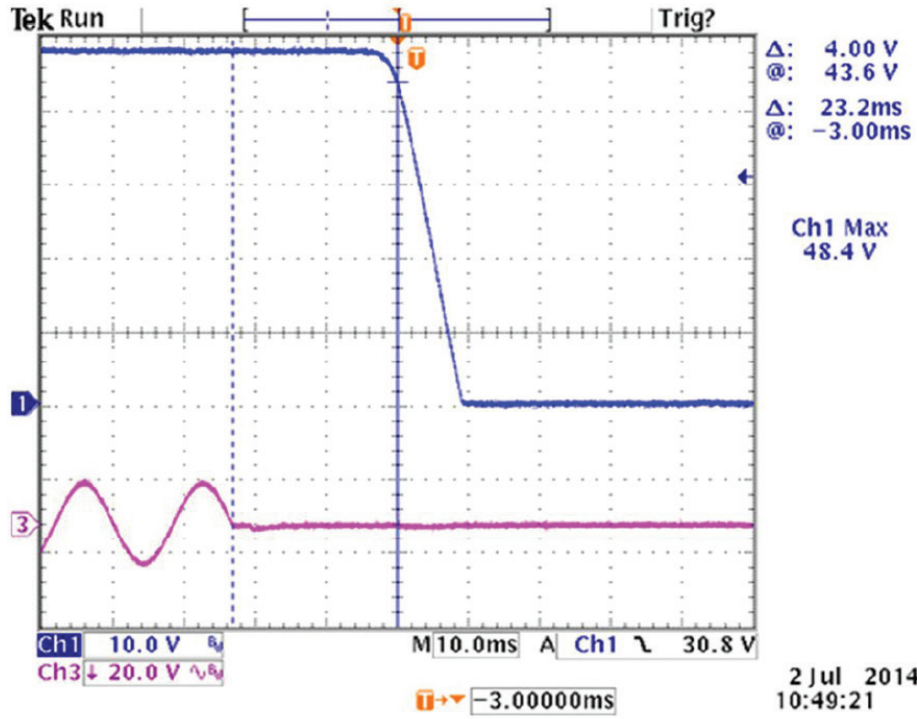

CH1:	$V_{out}$	$V_{in}$	115	VAC
CH3:	$V_{in}$	$I_{out}$	2.40	Amps
Min_Limit:	16	Meas	23.2	ms



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [LED Power Supplies](#) category:*

*Click to view products by [Condor](#) manufacturer:*

Other Similar products are found below :

[ESS015W-1000-12](#) [EUC-075S105DT](#) [PDA-WIFI](#) [PIFC-K250F](#) [PITB-K222A](#) [ALD-514012PJ134](#) [LB240S24KH](#) [LMH020-SPLC-0000-0000001](#) [79534](#) [79535](#) [EUG-200S210DT](#) [ESS030W-1050-21](#) [ESS030W-0900-32](#) [BPOXL 4-12-035](#) [SLM160W-3.9-40-ZA](#) [ESS010W-0180-42](#) [ESS010W-0350-24](#) [ESS010W-0200-42](#) [PDA080B-1A0G](#) [PDA150B-S1A5G](#) [ZPS-20](#) [SLM140W-1.05-130-ZA](#) [ESS040W-1400-27](#) [ESS015W-0700-18](#) [ESS010E-0250-42](#) [EDC-100S105SV-0007](#) [79278](#) [EUD-150S350DVA](#) [LWA320-C420-ARK-B](#) [50304](#) [HVG-320-36AB](#) [HVG-320-54AB](#) [OT FIT 50/220-240/300 D L](#) [OT FIT 35/220-240/350 D CS L](#) [OT FIT 65/220-240/350 D CS L](#) [ELEMENT 30/220-240/700 S](#) [LC 75W 100-400MA 1-10V LP EXC](#) [LCA 35W 150-700MA ONE4ALL LP PRE](#) [LCA 50W 100-400MA ONE4ALL LP PRE](#) [LCA 50W 350-1050MA ONE4ALL LP PRE](#) [LCA 50W 350-1050MA 2XCH LP PRE](#) [LCI 150/325-1050/300 O4A SL PRE](#) [LCA 75W 100-400MA ONE4ALL LP PRE](#) [LCA 45W 500-1400MA ONE4ALL SC PRE](#) [LC 50W 100-400MA FLEXC LP EXC](#) [LCA 75W 350-1050MA ONE4ALL LP PRE](#) [LC 50W 350-1050MA FLEXC LP EXC](#) [LC 75W 350-1050MA FLEXC LP EXC](#) [LCA 75W 900-1800MA ONE4ALL LP PRE](#) [LCA 100W 250-700MA ONE4ALL LP PRE](#)