


NOTES:
 CRIMPING:
 USE CRIMP TOOL: 360X10409X
 WITH TOOL INSERT: 360X20029X
 SELECTOR SETTINGS: 5 FOR AWG 12
 4 FOR AWG 14

STRIPPING DIMENSIONS

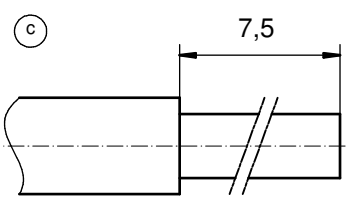

Directive 2002/95/EC RoHS compliant

3	1	REAR SIDE	COPPER ALLOY	GOLD FLASH over NICKEL
2	1	RETAINING RING	COPPER ALLOY	NICKEL PLATED
1	1	MATING SIDE	COPPER ALLOY	min. 30µin HARD GOLD over min. 50µin NICKEL
item	quantity	part description	material	plating

partlist				
tolerance ISO 2768-m		dim. in mm		scale: 5:1
date		name		material: see partlist
drawn 10.06.10		Schmidt		title: HIGH POWER CONTACT MALE CRIMP VERSION 20A / AWG 12-14 PREMATING D-SUB COMBINATION
appd. 10.06.10		Koch		
norm				
5 x c	Ä4115	27.09.201	K.H.	d-old
2 x b	Ä3728	23.08.2010	K.H.	
a	Original			
rev.	description	date	name	



dwg no:	Inventor 10	DIN-A3
13K1A590		sh: 1
part no:	131C11129X	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [D-Sub Contacts](#) category:

Click to view products by [CONEC](#) manufacturer:

Other Similar products are found below :

[D02-22-26S-10000](#) [8656352067LF](#) [131A15029X](#) [132A11019X](#) [132J22039X](#) [132A11029X](#) [132A11049X](#) [1757912-1](#) [188582-000](#)
[162A11889X](#) [1757913-1](#) [212558-1](#) [030-1955-000](#) [053744-0098](#) [053744-0099](#) [053745-0105](#) [053745-0111](#) [601098N003](#) [86303057NLF](#)
[131A11019X](#) [162A11819X](#) [40-9854MP](#) [1-208778-5](#) [FC120N2](#) [MC7526D/AA](#) [MC8122D/AA](#) [FC4010D-15](#) [FC4006D](#) [121A05329A](#)
[164C16669X](#) [86566620064LF](#) [C330-8997-101H](#) [131A13019X](#) [DLS3XS5AK40X](#) [09692825723](#) [030-1954-000](#) [L17DM53744207](#)
[L17RRD1M11400](#) [030-1952-000](#) [1655496](#) [030-1953-000](#) [030-1953-030](#) [132C11039X](#) [132J15019X](#) [132C15019X](#) [131A10029X](#)
[8638PSC2006LF](#) [8656453067LF](#) [86566520064LF](#) [L17DM537441](#)