


FLATCABLE CONNECTORS

PCB connector – 10 to 64 positions

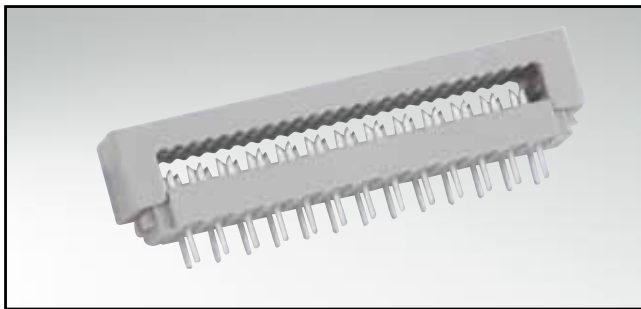


RoHS compliant



DESCRIPTION

- Insulation displacement termination (IDC)
- Contact spacing 2.54 mm
- Contact plating: gold or tin plated

PRODUCT DRAWING

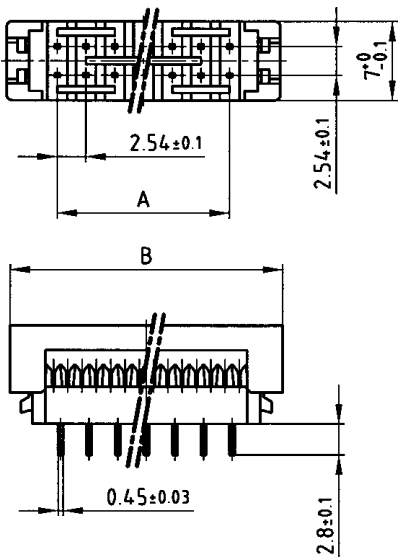

PCB-hole pattern

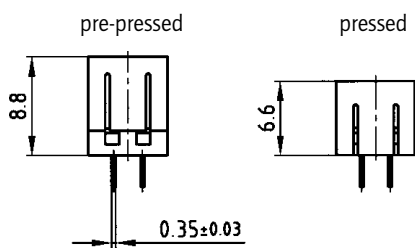

No. of Pos.	A ±0.1	B ±0.2
10	4x2.54=10.16	19.15
14	6x2.54=15.24	24.25
16	7x2.54=17.78	26.82
20	9x2.54=22.86	31.90
26	12x2.54=30.48	39.50
34	16x2.54=40.64	49.68
40	19x2.54=48.26	57.30
50	24x2.54=60.96	70.00
60	29x2.54=73.66	82.75
64	31x2.54=78.74	87.78

ORDER DATA

(Dim. = mm)

No. of Pos.	tin plated	No. of Pos.	tin plated
10	220 F 10169 X	34	220 F 10219 X
14	220 F 10179 X	40	220 F 10229 X
16	220 F 10189 X	50	220 F 10239 X
20	220 F 10199 X	60	220 F 10249 X
26	220 F 10209 X	64	220 F 10259 X

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [CONEC](#) manufacturer:

Other Similar products are found below :

[892-18-020-10-001101](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [009176003701906](#) [0050291907](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#)
[609-3404](#) [61062-3](#) [61082-181009](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [641991-4](#) [644827-2](#) [65817-](#)
[010LF](#) [65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68645-018](#) [68648-049](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)
[4853B](#) [707-5020](#) [707-5028](#) [71.350.2428.0](#) [71918-208LF](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-3052](#) [787-8014-00](#) [79531-3000](#)
[FCN-360C032-B](#) [FCN-367T-T012/H](#) [FCN-723D010/2](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#)