



**MINI USB Connector 5pin Solder Type**


**SPECIFICATIONS**

**Materials**

Insulator: thermoplastic, glass filled, UL 94V-0  
 Contacts: Phosphor bronze  
 Plated: 30µ" gold plated  
 SMD Plated: 120µ" tin plated  
 Plastic: PBT  
 Shell: Steel nickel plated

**Electrical**

Insulation Resistance: 1000 MΩ minimum  
 Contact Resistance: 30 mΩ Max. initial  
 Dielectric Withstanding Voltage: 750V AC for one minute  
 Voltage: 30V AC (rms)  
 Current: 1.5 Ampere max. per contact at 30°C T-rise  
 Temperature: -55°C ~85°C

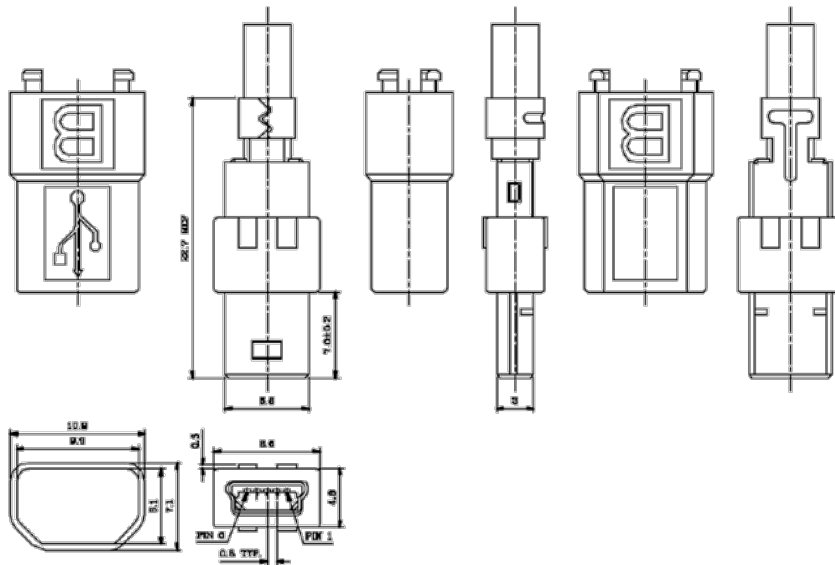

**Order Information**

**33MUB S - 05 P N 0**  
 1 2 3 4 5 6

**1. Series No.**  
33MUB:

**3. No. Of Contacts**  
05: 5 pin

**5. Insulator Color**  
N: Black

**2. Terminal Version**  
S: Solder type

**4. Connector Type**  
P: Male

**6. Packaging**  
0: Packed in bulk



File #: 127344



File #: LR97981

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [USB Connectors](#) category:*

*Click to view products by [CONEC](#) manufacturer:*

Other Similar products are found below :

[65-647-8-BK-BU](#) [950](#) [952](#) [E8144-B01021-L](#) [A-USB B-TOP-C](#) [MUSBA511N5](#) [MUSBD11135](#) [217450-1](#) [KMBVX-TH-5S-B30](#) [896-30-004-00-000000](#) [KUSBVX-BS1N-W30](#) [KUSBX-AP-KIT-SCBLK](#) [KUSBX-AS2N-W](#) [KUSBX-SMT2AP1S-W](#) [KUSBX-SMT2AP1S-W30](#) [935](#) [957](#) [30-498-6](#) [SK-60A-2](#) [17-210051](#) [1734082-1](#) [30-1574](#) [30-470](#) [30-489](#) [30-541](#) [30-572-3](#) [A-USB A-2P-C](#) [MIKROE-1451](#) [USBFTV2PEM2G](#) [USBFTVC6ZN](#) [KUSBX-AS2N-W30](#) [KUSBX-SLAS1N-W](#) [KUSBX-SMT-AS1N-W30](#) [4689-1](#) [1-1734084-2](#) [E8110-001-01](#) [33UBARS1-04SW11](#) [33UBAR-04SW11](#) [USBF21ZNSCC](#) [USBBFTV6ZC](#) [10135326-001LF](#) [M9177/3-1](#) [USB-A-S-F-B-VT](#) [925](#) [4198](#) [690-024-633-031](#) [KUSBEX-BSFS1N-W](#) [USBFTVC6MRG](#) [UA-20BMFA-SL8001](#) [17-250101](#)