

Technical specification:

Degree of protection: IEC 60529

IP 67, in mated condition

Temperature range:

-30°C ... +120°C

Materials:

Protecting cap:

TPU-V Loop:


Installation specification:

Recommended

torque:

0,4 Nm

PA GF

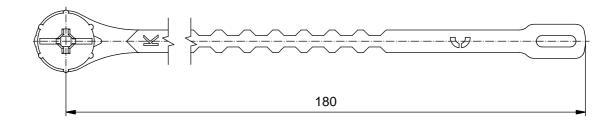



| Part no: | Description: | Colour: |
|----------|---|---------|
| 42-11773 | Protecting cap M8x1 female socket with loop | black |

OO NOT ALTER CAD DRAWING BY HAND Directive 2002/95/EC RoHS compliant

Index: b 11.11.13 Brü Ä4989 Data sheet revised, material changed

dim. in mm date name 18.01.13 Gitinow

21.01.13

title:

Protection cap M8x1 with loop, female socket

dwg no:

± 0,50mm ± 0,25mm ± 0,10mm 0 general tolerance: 0,0 0,00

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSIO OWNERSHIP AND COPYRIGHT OF CONEC GmbH

42K1A427

part no: see table

Kniesburges

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Circular Metric Connectors category:

Click to view products by CONEC manufacturer:

Other Similar products are found below:

600X518037X 6STD15PCR99B70A 8R4000A16M020 8R5000A16M005 1200910002 1203580030 1200910008 1200910011 1300140094 130203-0054 1300140026 1300150099 RF-12S1N8A90DU 1-3637-600-5205 1612618 21036836414 8R4006A16M010 8R5006A18A120 1604232 1R3006A20M005 RF-12P1N8A80DU RF-12P1N8A90DU 41-40011 42-01015 4-22279-4 4-22281-1 4-22284-9 43-01088 43-01203 41-40013 42-00008 43-00343 43-01032 43-01162 43-10000 600X518050X SACC-DSI-FS-5P-PG9-L180 SC 8R5006A16M020 8R5006A16M005 8R4000A16M010 6-22279-3 1605332 N03FA03144 1300140077 43-01338 XS2RD4265 RSC 4/9 XS2R-D426-1 XS8A-0441 859RD04-103R004