
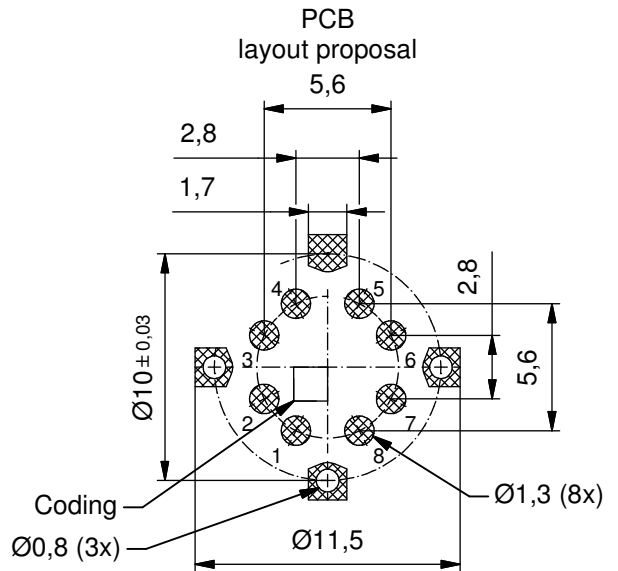


Tape & Reel - parts with adhesive pad Ø11mm

Cut-Out Front Panel



Technical specification:

Rated voltage:	8pos
IEC 61076-2-109	48 V
Current rating:	8pos
IEC 61076-2-109	0,5 A at 40°C
Transfer properties:	CAT 6A / 10 GBit/s
IEC 61076-2-109	
Insulation resistance:	>=100 MΩ
IEC 60512	
Pollution degree:	3
IEC 60664-1	
Degree of protection:	IP 67, in mated condition
IEC 60529	
Temperature range:	-25°C ... +95°C
EN 60512-11-10	-40°C
EN 60512-11-4	-40°C ... +85°C
Mating cycles:	>=100
IEC 60512-9a	
Total spring force:	max 10N

Materials:

Contact:	CuZn, Ni b / Au 0,2 gal.
Contact carrier:	LCP GF, UL 94 V-0
Shielding cross:	CuSn, Ni / sel. Sn
Socket housing:	CuZn, Ni
Sealing:	FPM

Coplanarity of all contacts max 0,1mm

Suitable for reflow soldering max. 60s / 250°C

Part no. packing unit Tape & Reel:	Part no. packing unit in bulk:	Description:	Pos
43-02759TR	43-02759	SAL - 12X - FK8 - X13 / SMT	8

DO NOT ALTER CAD DRAWING BY HAND	RoHS & REACH compliant	dim. in mm		title: Female socket M12x1 SMT, X-Cod., frontmounting, X13									
		date	name										
		drawn	23.03.16	Brüntrup	dwg no: 43K1A3042								
		appd.	23.03.16	Willer			part no: see table						
general tolerance: <table border="0" style="margin-left: 20px;"> <tr><td>0</td><td>± 0,50mm</td></tr> <tr><td>0,0</td><td>± 0,25mm</td></tr> <tr><td>0,00</td><td>± 0,10mm</td></tr> <tr><td>*</td><td>± 1,5°</td></tr> </table>		0	± 0,50mm	0,0	± 0,25mm	0,00	± 0,10mm	*	± 1,5°				
0	± 0,50mm												
0,0	± 0,25mm												
0,00	± 0,10mm												
*	± 1,5°												
<small>THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH</small>													

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Circular Metric Connectors](#) category:

Click to view products by [CONEC](#) manufacturer:

Other Similar products are found below :

[600X518037X](#) [6STD15PCR99B70A](#) [8R4000A16M020](#) [8R5000A16M005](#) [1200910002](#) [1203580030](#) [1200910008](#) [1200910011](#) [1300140094](#)
[130203-0054](#) [1300140026](#) [1300150099](#) [RF-12S1N8A90DU](#) [1-3637-600-5205](#) [1612618](#) [21036836414](#) [8R4006A16M010](#) [8R5006A18A120](#)
[1604232](#) [1R3006A20M005](#) [RF-12P1N8A80DU](#) [RF-12P1N8A90DU](#) [41-40011](#) [42-01015](#) [4-22279-4](#) [4-22281-1](#) [4-22284-9](#) [43-01088](#) [43-](#)
[01203](#) [41-40013](#) [42-00008](#) [43-00343](#) [43-01032](#) [43-01162](#) [43-10000](#) [600X518050X](#) [SACC-DSI-FS-5P-PG9-L180 SC](#) [8R5006A16M020](#)
[8R5006A16M005](#) [8R4000A16M010](#) [6-22279-3](#) [1605332](#) [N03FA03144](#) [1300140077](#) [43-01338](#) [XS2RD4265](#) [RSC 4/9](#) [XS2R-D426-1](#)
[XS8A-0441](#) [859RD04-103R004](#)