


HIGH GRAPHICS PERFORMANCE WITH LOW POWER CONSUMPTION

conga-BAF




- Based on AMD Embedded G-Series Processors
- Best price/performance ratio
- High performance graphics

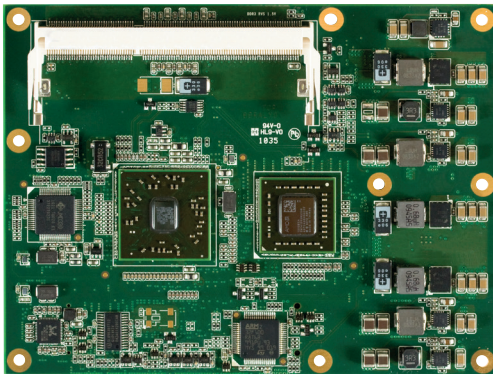

Formfactor	COM Express™ Basic (95 x 125 mm) Type II Connector Layout				
CPU	AMD G-T56N	1.6 GHz	Dual Core	cache 512 kB x2	18W
	AMD G-T40N	1.0 GHz	Dual Core	cache 512 kB x2	9W
	AMD G-T44R	1.2 GHz	Single Core	cache 512 kB	9W
	AMD G-T40R	1.0 GHz	Single Core	L2 cache 512 kB	5.5W
	AMD G-T40E	1.0 GHz	Dual Core	L2 cache 512 kB x2	6.4W
	AMD Embedded G-Series Processors				
DRAM	Single channel up to two 4 GB DDR3 SO-DIMM memory (up to 1066 MHz)				
Chipset	AMD A55E Controller Hub				
Ethernet	Gigabit Ethernet Realtek RTL8111E				
I/O Interfaces	6x PCI Express™ x1 lanes 4x Serial ATA® 1x EIDE (up to UDMA 6) 8x USB 2.0 PCI Bus (Rev. 2.3 compliant 33 MHz) 2x Express™ Card				
Sound	High Definition Audio Interface				
Graphics	Integrated High Performance Video DirectX®11 graphics with UVD 3.0 Integrated VGA DAC Dual Simultaneous Display Support no PEG support				
LVDS	2x24 Bit 800x600 to 1920x1200@60Hz; VESA standard or JEDIA data mapping; Automatic Panel Detection via EDID/EPI				
DisplayPort	2x DisplayPort 1.1a shared with HDMI ports second port multiplexed with LVDS resolutions up to 2560x1600 - 18W APU 1920x1200 - 9W APU				
HDMI or DVI	2x HDMI 1.3 Ports shared with DisplayPort second port multiplexed with LVDS resolutions up to 1920x1080 / 1920x1200 for DVI mode				
CRT	400 MHz RAMDAC resolutions up to 2560x1600 - 18W APU 1920x1200 9W APU				
congatec Board Controller	Multi Stage Watchdog non-volatile User Data Storage Manufacturing and Board Information Board Statistics BIOS Setup Data Backup I²C bus (fast mode 400 kHz multi-master) Power Loss Controll				
Embedded BIOS Features	AMI-Aptio UEFI BIOS with congatec Embedded BIOS features				
Security	The conga-BAF can be optionally equipped with a discrete "Trusted Platform Module" (TPM). It is capable of calculating efficient hash and RSA algorithms with key lengths up to 2,048 bits and includes a real random number generator. Security sensitive applications such as gaming and e-commerce will benefit also with improved authentication integrity and confidence levels.				
Power Management	ACPI 3.0 with battery support				
Operating Systems	Microsoft® Windows8 Microsoft® Windows7 Microsoft® Windows XP Microsoft® Windows® embedded Standard Microsoft® Windows CE 6.0 Microsoft® Windows Embedded Compact 7 Linux				
Power Consumption	Typ. application: tbd. see manual for full details CMOS Battery Backup				
Temperature	Operating: 0 .. +60°C Storage: -20 .. +80°C				
Humidity	Operating: 10 - 90% r. H. non cond. Storage: 5 - 95% r. H. non cond.				
Size	95 x 125 mm (3.74" x 4.92")				

conga-BAF | Block diagram

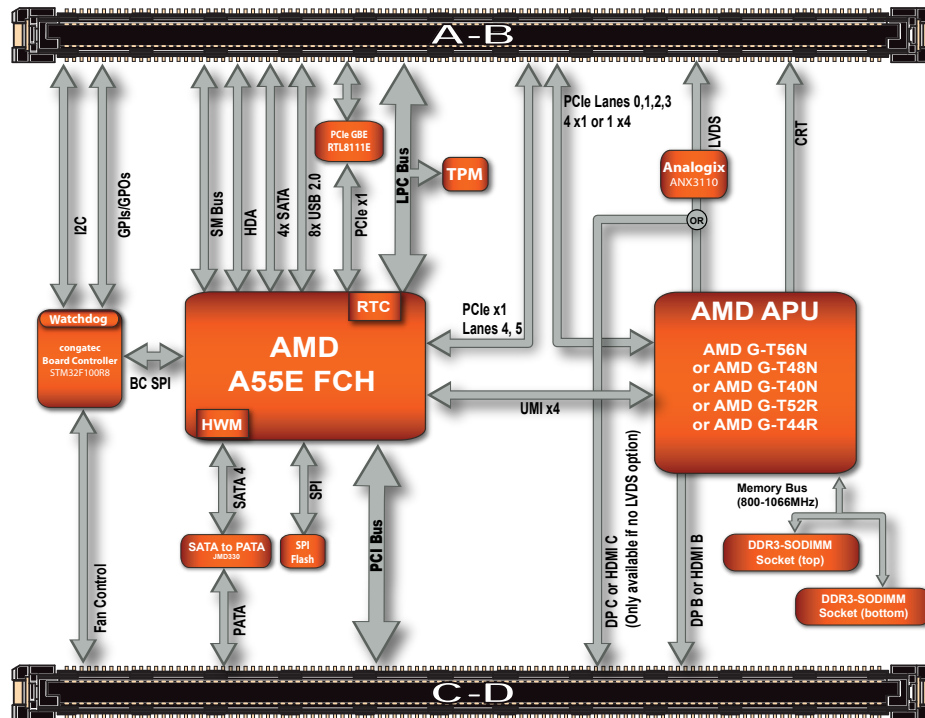

conga-BAF | Order Information

Article	PN	Description
conga-BAF/T56N	041001	AMD G-Series Dual Core Processor T56N 1.6GHz 1MB L2 cache and 1333MT/s DDR3 SODIMM memory interface for up to 8GB
conga-BAF/T40N	041003	AMD G-Series Dual Core Processor T40N 1.0GHz 1MB L2 cache and 1066MT/s DDR3 SODIMM memory interface for up to 8GB
conga-BAF/T44R	041005	AMD G-Series Single Core Processor T44R 1.2GHz 512kB L2 cache and 1066MT/s DDR3 SODIMM memory interface for up to 8GB
conga-BAF/T40R	041006	AMD G-Series Single Core Processor T40R 1.0GHz 5.5W 1MB L2 cache and 1066MT/s DDR3 SODIMM memory interface for up to 8GB
conga-BAF/T40E	041007	AMD G-Series Dual Core Processor T40E 1.0GHz 6.5W 1MB L2 cache and 1066MT/s DDR3 SODIMM memory interface for up to 8GB
conga-BAF/HSP-B	041020	Standard passive cooling solution for module conga-BAF. All standoffs are with 2.7mm bore hole
conga-BAF/HSP-T	041021	Standard heatspreader for COM Express Basic module conga-BAF. All standoffs are M2.5mm thread
conga-BAF/CSP-B	041025	Standard passive cooling solution for module conga-BAF. All standoffs are with 2.7mm bore hole
conga-BAF/CSP-T	041026	Standard passive cooling solution for module conga-BAF. All standoffs are M2.5mm thread
conga-BAF/CSA-B	041027	Standard active cooling solution for module conga-BAF. Integrated 12V fan. All standoffs are with 2.7mm bore hole
conga-BAF/CSA-T	041028	Standard active cooling solution for module conga-BAF. Integrated 12V fan. All standoffs are M2.5mm thread
DDR3-SODIMM-1066 (1GB)	068750	DDR3 SODIMM memory module with 1066MT/s and 1GB RAM
DDR3L-SODIMM-1600 (2GB)	068755	DDR3L SODIMM memory module with 1600 MT/s (PC3L-12800S) and 2GB RAM
DDR3L-SODIMM-1600 (4GB)	068756	DDR3L SODIMM memory module with 1600 MT/s (PC3L-12800S) and 4GB RAM

Accessories

conga-CEVAL	065749	Evaluation Carrier Board for COM Express Type 2 modules
conga-Cdebug	047854	COM-Express debugging platform. Including cable for COM PS/2 and VGA.
conga-LDVI/EPI	011115	LVDS to DVI converter board for digital flat panels with onboard EEPROM
conga-HDMI/Display Port adapter 4k	500030	The conga-DP/HDMI adapter 4k is used for evaluation of the DP/HDMI graphics interface of x86 Qseven and COM Express modules in combination with the congatec evaluation carrier boards conga-QEVAL and conga-TEVAL. It supports full 4k display resolution.
conga-FPA2	047250	Flatpanel prototype adapter to develop your own flatpanel adapter Including cables set.
COM-Express-carrierboard-Socket-5	400007	Connector for COM-Express carrier boards height 5mm packing unit 4 pieces
COM-Express-carrierboard-Socket-8	400004	Connector for COM-Express carrier boards height 8mm packing unit 4 pieces

© 2016 congatec AG. All rights reserved.

All data is for information purposes only. Although all the information contained within this document is carefully checked, no guarantee of correctness is implied or expressed. Product names, logos, brands, and other trademarks featured or referred are the property of their respective trademark holders. These trademark holders are not affiliated with congatec AG. Rev. July 03, 2018 WME

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Heat Sinks](#) category:

Click to view products by [Congatec](#) manufacturer:

Other Similar products are found below :

[581102B00000G](#) [656-15ABPE](#) [657-20ABPNE](#) [7020B-TC12-MTG](#) [73452PPBA](#) [7G0011A](#) [PF720G](#) [A22-4026](#) [120-1873-007](#) [HAH10L](#)
[HAH15L](#) [1542616-1](#) [HS-2506-F1](#) [HS-87M0-F2](#) [218-40CTE3](#) [231-69PAB-15V](#) [25-7520](#) [SW50-4G](#) [231-75PAB-13V](#) [231-75PAB-15V](#) [253-](#)
[122ABE-22](#) [PSC22CB](#) [HAF10L](#) [HAQ10T](#) [D10100-28](#) [BDN183CBA01](#) [3-21053-4](#) [32438](#) [TX0506-1B](#) [TX1806B](#) [LAE66A3CB](#) [WA-DT2-](#)
[101E](#) [511-3U](#) [73381PPBA](#) [73403PPBA](#) [7G0047C](#) [COMX-440-HSP](#) [510-12M](#) [D10650-40T5](#) [V8511 Y](#) [APF40-40-13CB/A01](#)
[780653U04500G](#) [ATS-54310K-C2-R0](#) [FK 216 CB SA](#) [FK 231 SA 220](#) [648-51AB](#) [657-20ABPESC](#) [2341BG](#) [679-25AG](#) [FK 212 CB SA](#)