

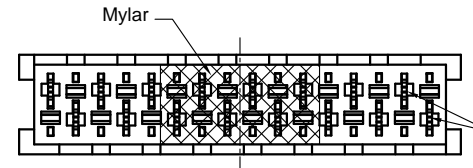
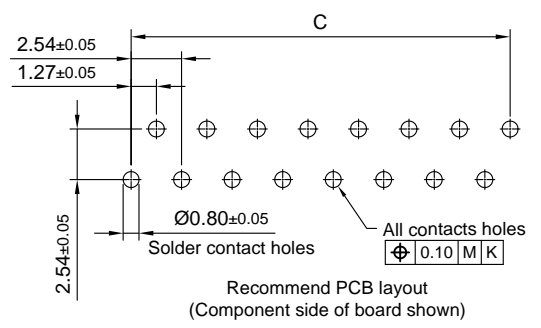
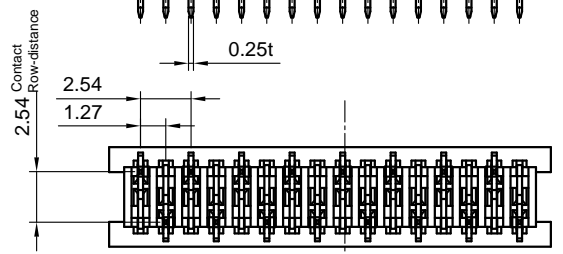


The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of any part of this document is strictly prohibited. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays in exercise of such rights does not constitute a waiver of such rights.

Dept	Qty
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1



Reference mating interface pattern  
1.27 staggered pitch x 1.5 row distance.

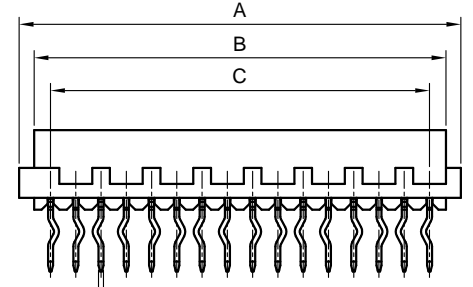

Positions	DIM A	DIM B	DIM C
4	6.96	5.46	3.81
6	9.50	8.00	6.35
8	12.04	10.54	8.89
10	14.58	13.08	11.43
12	17.12	15.62	13.97
14	19.66	18.16	16.51
16	22.20	20.70	19.05
18	24.74	23.24	21.59
20	27.28	25.78	24.13
22	29.82	28.32	26.67
24	32.36	30.86	29.21



(Series Image-Reference Only)

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	DGQ 06/14/11'		LJC 06/14/11'
B	ADD P/N CODE	JLZ 01/04/15'	HZW 01/04/15'	LJC 01/04/15'
C	PACKING TYPE CHANGE	JLZ 02/10/15'	HZW 02/10/15'	LJC 02/10/15'
D	DRAWING UPDATE	JLZ 08/28/18'		

NOTES:

- Materials
  - 1.1 Insulator: Thermoplastic (UL 94V-0).
  - 1.2 Contact: Copper alloy.
- Specification
  - 2.1 Temperature range: -40°C ~ +105°C.
  - 2.2 Contact resistance: 30mΩ max.
  - 2.3 Insulation resistance: 1000MΩ min.
  - 2.4 Dielectric withstanding voltage: AC 500V per minute.
  - 2.5 Voltage rating: 250V.
  - 2.6 Current rating: 1.2A.
- Product number code:
 

DS1015-04 - X X X X X

  - X: Packing type
  - B: Tube
  - R: Tape on reel
  - Mylar support
  - S: W/ Mylar
  - X: W/O Mylar
  - Contact plating
  - 6: Full matt tin
  - Housing color
  - R: Red
  - No. of contacts
  - 04 06 08 10 12 14
  - 16 18 20 22 24

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	MICRO MATCH FEMALE VERTICAL THROUGH HOLE TYPE
X.	±0.60	X.	±5°	UNITS	mm	SERIES	DS1015-04 SERIES
.X	±0.38	.X	±3°	SHEET SIZE	A4		
.XX	±0.25	.XX	±2°				
DRAWING TYPE		CUSTOMER		<b>晨翔电子有限公司</b> CONNELY ELECTRONIC CO. LTD			
SCALE		1:1					
DRAWING NO.		C-DS1015-04-XXXXX-D					

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [Connfly](#) manufacturer:*

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)  
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)  
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)  
[4853B](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#)  
[801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#)  
[820-22-008-30-001101](#) [821-22-002-10-001101](#)