



| | |
|------|---|
| Dept | |
| Qty | |
| DC | 1 |
| ED | 1 |
| IE | 1 |
| ISO | 1 |
| PD | 1 |
| R&D | 1 |
| SD | 1 |
| QA | 1 |
| QC | 1 |
| QE | 1 |

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of any part of this document is strictly prohibited. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

Housing with contact

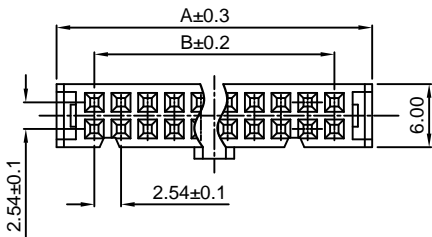


Contact Scale:2/1

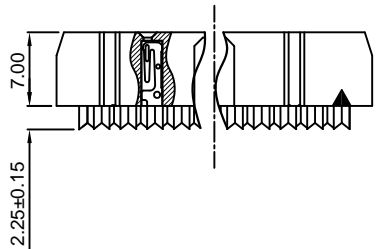

Upper cover



Top cover

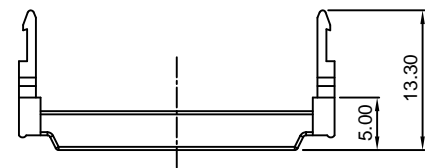


(Series Image-Reference Only)

| Position | Dimension | |
|----------|-----------|-------|
| | A | B |
| 06 | 12.28 | 5.08 |
| 08 | 14.82 | 7.62 |
| 10 | 17.36 | 10.16 |
| 12 | 19.90 | 12.70 |
| 14 | 22.44 | 15.24 |
| 16 | 24.98 | 17.78 |
| 20 | 30.06 | 22.86 |
| 24 | 35.14 | 27.94 |
| 26 | 37.68 | 30.48 |
| 30 | 42.76 | 35.56 |
| 34 | 47.84 | 40.64 |
| 40 | 55.46 | 48.26 |
| 44 | 60.54 | 53.34 |
| 50 | 68.16 | 60.96 |
| 60 | 80.86 | 73.66 |
| 64 | 85.94 | 78.74 |


| REV. | DESCRIPTION | DRAWN | CHECKED | APPROVED |
|------|------------------|---------------|---------------|---------------|
| A | NEW RELEASE | LJH 09/20/05' | | LJC 09/20/05' |
| B | ADD PACKING TYPE | JLZ 04/02/15' | HZW 04/02/15' | LJC 04/02/15' |
| D | DRAWING UPDATE | JLZ 03/31/22' | | |

NOTES:

- Electrical characteristics:
 - Contact resistance: 20mΩ Max. Initial.
 - Dielectric withstanding voltage: 500V AC(rms) for 1 minute.
 - Insulation resistance: 1000MΩ Min.
- Environment characteristics:
 - Temperature: -40°C~+105°C.
- Part number: DS1016
- Product number code:

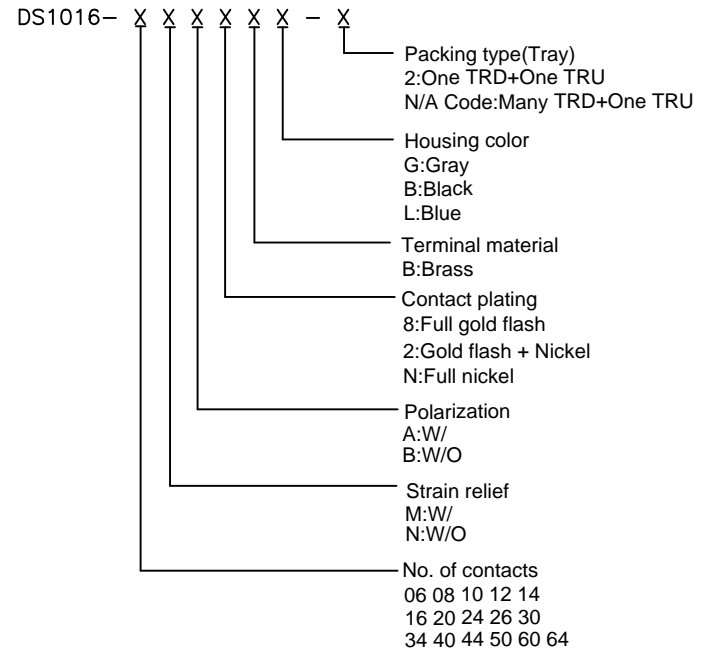

| | | | | | | |
|-------------------|---------------------|------------|--------|--------|---------------------------|--|
| GENERAL TOLERANCE | ANGLE TOLERANCE | PROJECTION | | TITLE | I.D.C SOCKET PITCH 2.54mm | |
| X. ±0.60 | X. ±5° | UNITS | mm | SERIES | DS1016 SERIES | |
| .X ±0.38 | .X ±3° | SHEET SIZE | A4 | | | |
| .XX ±0.25 | .XX ±2° | | | | | |
| DRAWING TYPE | CUSTOMER | | | | | |
| SCALE | 1:1 | SHEET | 1 OF 1 | | | |
| DRAWING NO. | C-DS1016-XXXXXX-X-D | | | | | |



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [I/O Connectors](#) category:

Click to view products by [Connfly](#) manufacturer:

Other Similar products are found below :

[571763P](#) [59811-0000](#) [61-168618-12P](#) [D20419-211](#) [76871-1403](#) [PCR-E36PM](#) [PCS-XE26LKA](#) [PCS-XES68MS+](#) [G38A71314B](#) [DX40-50P\(55\)](#) [1571250010](#) [157-22500-3](#) [MS3471L14-19P L/C](#) [192991-0703](#) [91-569786-35H](#) [FCN-260C008-A/L0](#) [FCN-260C024-AL0](#) [FCN-261Z008](#) [2000314-1](#) [200331-1](#) [PCS-E28FS+](#) [PCS-XE26SLFD+](#) [PCS-XE26SLFDT+](#) [G730VID08BDC24](#) [HDMR-29-01-S-SM-TR](#) [HDR-E14MSG1+](#) [54182-0605](#) [UE86K842720321](#) [38113800006](#) [DP3AR020WQ1R200](#) [DRA-26PC-F0R](#) [Z4.102.0680.0](#) [500-1040](#) [500-1052](#) [ZP-4008-66L](#) [10-565995-597N](#) [10-584459-12P](#) [DX40-20P\(55\)](#) [5554841-1](#) [SM3100F14S-12P](#) [SM3106F14S-7S-LC](#) [SM3106R18-18S](#) [U90B3054061110](#) [U65-E04-4020](#) [557-262M2-06C](#) [PCS-96LFD+](#) [60-042222-02S](#) [10099439-003C-TRLF](#) [226-0348-000](#) [10137239-0021LF](#)