
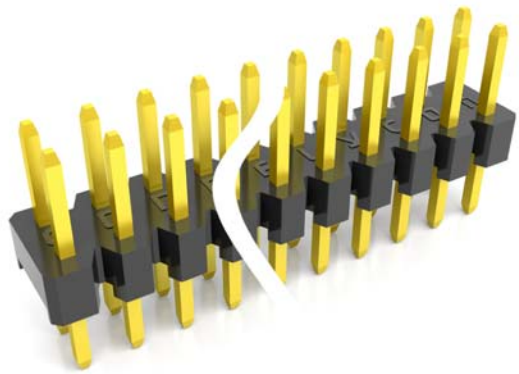
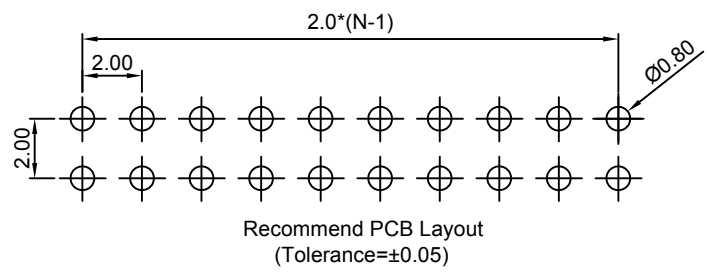

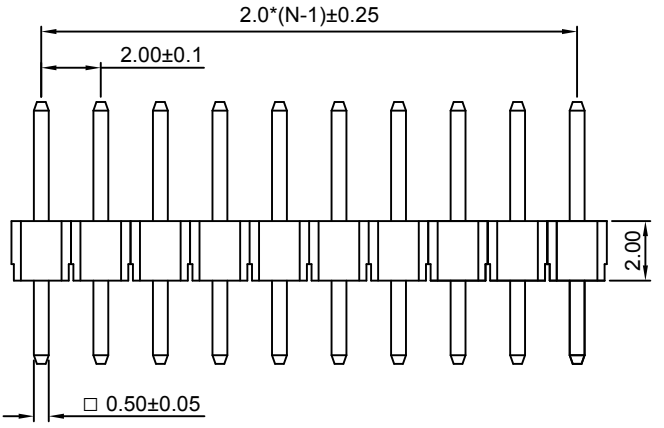


| | |
|------|---|
| Dept | |
| Qty | |
| DC | 1 |
| ED | 1 |
| IE | 1 |
| ISO | 1 |
| PD | 1 |
| R&D | 1 |
| SD | 1 |
| QA | 1 |
| QC | 1 |
| QE | 1 |

A&B:Customer length available
N=No.of contacts/2

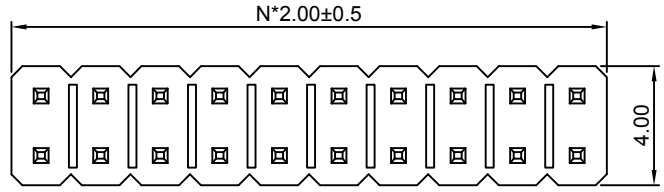

(Series Image-Reference Only)

| REV. | DESCRIPTION | DRAWN | CHECKED | APPROVED |
|------|----------------|---------------|---------|---------------|
| A | NEW RELEASE | LJH 06/21/05' | | LJC 06/21/05' |
| B | ADD DIM | LL 10/30/06' | | LJC 10/30/06' |
| E | DRAWING UPDATE | JLZ 04/10/20' | | |

Notes:

Specifications:

- Contact Resistance: 20mΩ Max.
- Insulation Resistance: 1000MΩ Min.
- Dielectric Withstanding Voltage: 500V AC(rms) For 1 Minute.
- Current Rating:1.5A.
- Temperature: -40°C~+105°C.

Materials:

- Contact Material: Copper Alloy.
- Contact Plating: Gold Plating Over Nickel.
- Insulator Material: PA-9T,Black,UL94-V0.

Product Number Code:

DS1025-05 - X X X X X X - X

- Plating level(For gold only)
3A: Level 3A
B: Level B
- Table A & Dim.A B type
1: Type 1
or A*-*B**
- Mounting type
V: V/T type
- Housing color
B: Black
- Contact plating
8: Full gold flash
6: Tin
- Connector type
P: Plug
- No.of contacts
2x2~2x40

Table A:

| TYPE | Dimension | | TYPE | Dimension | |
|------|-----------|-------|------|-----------|-------|
| | A | B | | A | B |
| 1 | 2.80 | 4.00 | 9 | 3.00 | 3.80 |
| 2 | 3.50 | 5.08 | 10 | 2.80 | 5.50 |
| 3 | 10.00 | 2.00 | 11 | 3.00 | 3.70 |
| 4 | 2.80 | 10.20 | 12 | 2.20 | 4.60 |
| 5 | 4.00 | 8.00 | 13 | 3.00 | 6.00 |
| 6 | 2.50 | 4.30 | 14 | 2.40 | 5.00 |
| 7 | 2.80 | 3.90 | 15 | 2.70 | 8.50 |
| 8 | 3.00 | 3.50 | 16 | 2.80 | 11.00 |

| | | | |
|-------------------|------------------------|-----------------|--------|
| GENERAL TOLERANCE | | ANGLE TOLERANCE | |
| X. | ±0.60 | X. | ±5° |
| .X | ±0.38 | .X | ±3° |
| .XX | ±0.25 | .XX | ±2° |
| DRAWING TYPE | | CUSTOMER | |
| SCALE | 1:1 | SHEET | 1 OF 1 |
| DRAWING NO. | C-DS1025-05-XXXXXX-X-E | | |

| | | | |
|------------|----|--------|---------------------|
| PROJECTION | | TITLE | 2.0mm Pin Header |
| UNITS | mm | | Double Row V/T Type |
| SHEET SIZE | A4 | SERIES | DS1025-05 SERIES |

晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD

The information provided herein is from CONNFLY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNFLY or its affiliates. Unauthorized use or reproduction of any part of this document is strictly prohibited. CONNFLY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights. Its use in any format or manner. CONNFLY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Connfly](#) manufacturer:

Other Similar products are found below :

[57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [009176003701906](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [644827-2](#) [65495-038](#) [65692-001LF](#)
[65781-018](#) [65781-047](#) [65817-010LF](#) [65817-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#)
[M90C108951C](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5028](#) [71.350.2428.0](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-](#)
[3052](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#) [803-41-018-10-001000](#)
[803-43-024-10-001000](#)