
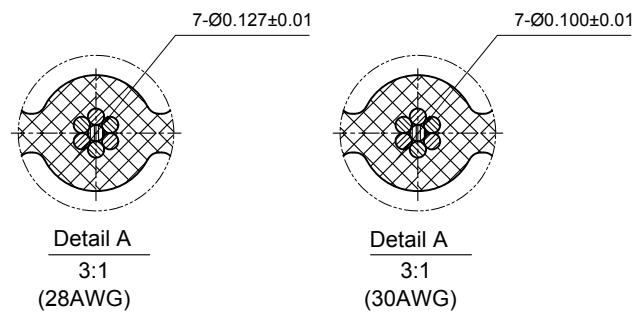
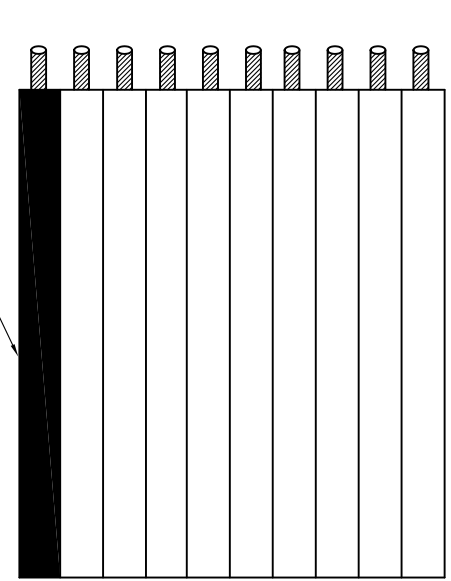


|      |   |
|------|---|
| Dept |   |
| Qty  |   |
| DC   | 1 |
| ED   | 1 |
| IE   | 1 |
| ISO  | 1 |
| PD   | 1 |
| R&D  | 1 |
| SD   | 1 |
| QA   | 1 |
| QC   | 1 |
| QE   | 1 |

| REV. | DESCRIPTION | DRAWN         | CHECKED | APPROVED |
|------|-------------|---------------|---------|----------|
| A    | NEW RELEASE | JLZ 08/28/20' |         |          |
|      |             |               |         |          |
|      |             |               |         |          |


The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of any part of this document is strictly prohibited. CONNELY reserves the right to make changes to this document without notice and to exercise such rights to exercise such rights does not constitute a waiver of such rights. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

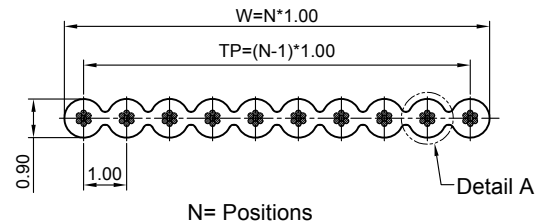

**NOTES:**

- 1. Materials:**
  - Insulation:PVC, Grey.
  - Conductor:Copper with tin plating.
- 2. Specification**
  - Rating: 300V
  - Conductor Size: 28~30AWG
  - Insulation resistance: 100MΩ/km min.
  - Operating temperature:-20°C~70°C.
- 3. Application**
  - Internal wiring of computers,electronic exchanges,measurement control devices, business machines,communication devices, and other electronic equipment.

**4. Product Number Code**

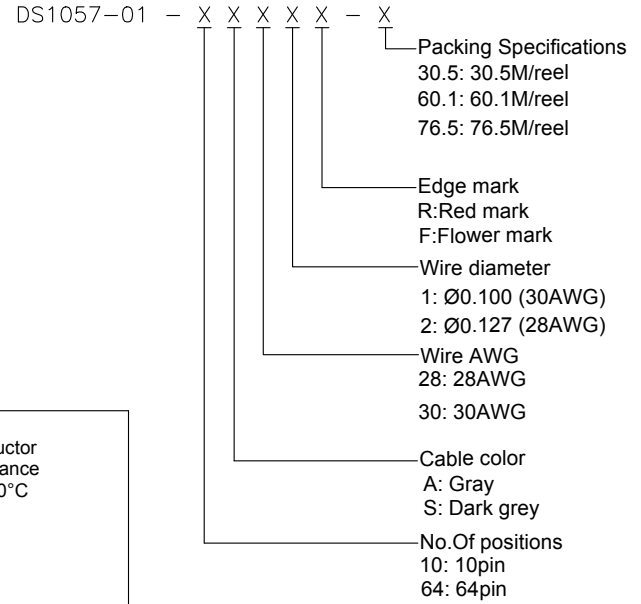


| Number | Dimensions |       |           | Max. conductor resistance<br>DC 20°C<br>Ω/m |
|--------|------------|-------|-----------|---|
|        | TP(mm)     | W(mm) | Tolerance |   |
| 10     | 9.00       | 10.00 | ±0.30     | Ø.100<0.397<br>Ø.127<0.237                  |
| 14     | 13.00      | 14.00 | ±0.30     |   |
| 16     | 15.00      | 16.00 | ±0.30     |   |
| 20     | 19.00      | 20.00 | ±0.30     |   |
| 24     | 23.00      | 24.00 | ±0.30     |   |
| 26     | 25.00      | 26.00 | ±0.30     |   |
| 30     | 29.00      | 30.00 | ±0.30     |   |
| 34     | 33.00      | 34.00 | ±0.40     |   |
| 40     | 39.00      | 40.00 | ±0.40     |   |
| 50     | 49.00      | 50.00 | ±0.40     |   |
| 60     | 59.00      | 60.00 | ±0.40     |   |
| 64     | 63.00      | 64.00 | ±0.40     |   |

|                   |                 |
|-------------------|-----------------|
| GENERAL TOLERANCE | ANGLE TOLERANCE |
| X. ±0.60          | X. ±5°          |
| .X ±0.38          | .X ±3°          |
| .XX ±0.25         | .XX ±2°         |

|            |    |            |                                 |
|------------|----|------------|---------------------------------|
| PROJECTION |    | TITLE      | UL 2651 PITCH 1.00mm FLAT CABLE |
| UNITS      | mm | SHEET SIZE | A4                              |
| SHEET SIZE | A4 | SERIES     | DS1057-01 SERIES                |

**FOR TME ONLY**

|              |                      |
|--------------|----------------------|
| DRAWING TYPE | CUSTOMER             |
| SCALE        | 1:1 SHEET 1 OF 1     |
| DRAWING NO.  | C-DS1057-01-XXXX-X-A |



**晨翔电子有限公司**  
CONNFLY CONNELY ELECTRONIC CO. LTD

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Ribbon Cables / IDC Cables](#) category:*

*Click to view products by [Connfly](#) manufacturer:*

Other Similar products are found below :

[FSK-12A](#) [AWG28-10G](#) [EHJ3C](#) [EHJ4C](#) [FSP-25A](#) [cab-LVDV-DAT-34-15](#) [49635-C62-S2](#) [1-3636-600-5204](#) [92315-1408](#) [426171120-3](#) [2-1589735-3](#) [JSM015PP2DCC23N](#) [92301-0283](#) [ACL-eSSI-2](#) [92301-0718](#) [MMSDT-06-20-S-05.5-D-K-LDX](#) [IDD-04-G](#) [NM-2J2-051-PS1-JJAB](#) [1700/26SF \(100FT\)](#) [1700/34SF \(100FT\)](#) [3801/09 \(100FT\)](#) [S30109](#) [96053-0000-00-0](#) [NM-2J2-065-SS1-JJ00-272](#) [7940098862](#) [IDMD-13-D-07.87](#) [166466](#) [HQCD-030-40.00-TTL-SBL-1-N](#) [HDR-201768-01-PCIEC](#) [DS1052-082B2NA201501](#) [DS1052-102B2NA201501](#) [DS1052-122B2MA201501](#) [DS1052-122B2NA201501](#) [DS1052-262B2NA201501](#) [DS1052-302B2MA201501](#) [DS1052-302B2MA203001](#) [DS1052-302B2MA206001](#) [DS1052-302B2NA201501](#) [DS1052-302B2NA203001](#) [DS1052-302B2NA206001](#) [DS1052-342B2MA201501](#) [DS1052-342B2MA203001](#) [DS1052-342B2NA201501](#) [DS1052-342B2NA203001](#) [DS1052-342B2NA206001](#) [DS1052-402B2MA201501](#) [DS1052-402B2MA203001](#) [DS1052-402B2MA206001](#) [DS1052-402B2NA201501](#) [DS1052-402B2NA203001](#)