





| REV. | DESCRIPTION | DRAWN         | CHECKED | APPROVED |
|------|-------------|---------------|---------|----------|
| A    | NEW RELEASE | JLZ 08/01/16' | ~       |          |

NOTES:

- ELECTRICAL CHARACTERISTICS:
  - CONTACT RESISTANCE: 20mΩ Max.
  - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
  - INSULATION RESISTANCE: 1000MΩ Min.
  - VOLTAGE RATING:125V.
  - CURRENT RATING:1.5A.
- ENVIRONMENT CHARACTERISTICS:
  - TEMPERATURE: -40°C~+85°C.
- MATERIALS
  - CONTACT MATERIAL: COPPER ALLOY.
  - CONTACT PLATING: GOLD.
  - INSULATOR MATERIALS: PBT BLACK.
- PRODUCT NUMBER CODE:

DS1129-05-X X X X X - X

- X:W/O Shrapnel
- P:PBT
- O:Gold Flash
- B:Black
- 8:8p8c
- S:Socket

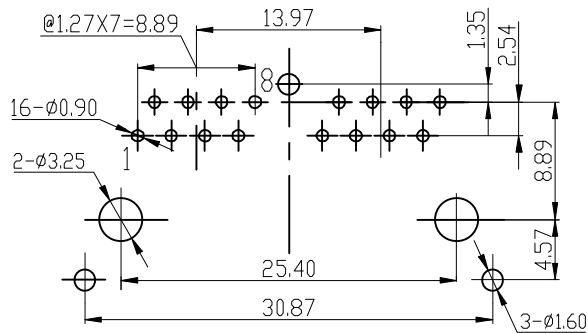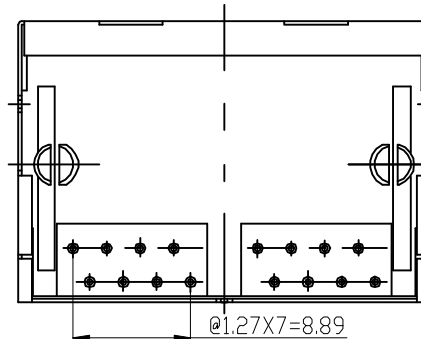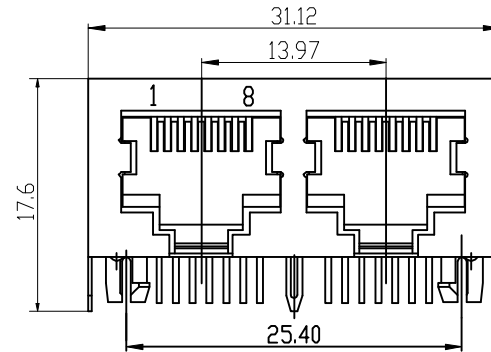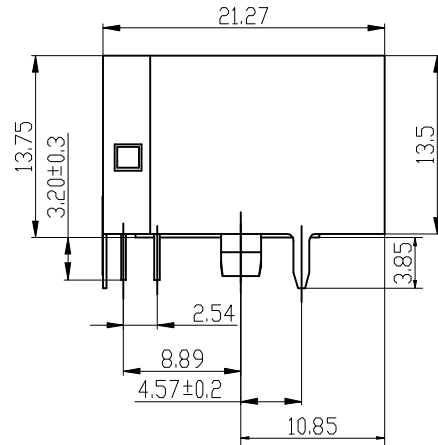

PCB LAYOUT  
THICKNESS=1.6mm

|                   |       |                       |     |  |    |                       |  |              |                  |
|-------------------|-------|-----------------------|-----|--|----|-----------------------|--|--------------|------------------|
| GENERAL TOLERANCE |       | ANGLE TOLERANCE       |     | PROJECTION   |    | TITLE                 | PCB Jack 8 Positions 1*2 Port W/ Shell 4.57mm Type |              |                  |
| X.                | ±0.60 | X.                    | ±5° | UNITS  | mm | SHEET SIZE            | A4   | SERIES       | DS1129-05 SERIES |
| .X                | ±0.38 | .X                    | ±3° | <b>晨翔电子有限公司</b><br><b>CONNFLY CONNFLY ELECTRONIC CO. LTD</b> |    |                       |  |              |                  |
| .XX               | ±0.25 | .XX                   | ±2° |  |    |                       |  |              |                  |
| DRAWING TYPE      |       | CUSTOMER              |     | SCALE  |    | 1:1                   |  | SHEET 1 OF 1 |                  |
| DRAWING NO.       |       | C-DS1129-05-XXXXX-X-A |     | DRAWING NO.  |    | C-DS1129-05-XXXXX-X-A |  |              |                  |

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Modular Connectors / Ethernet Connectors](#) category:*

*Click to view products by [Connfly](#) manufacturer:*

Other Similar products are found below :

[8949-H88/06BLKA/SN](#) [74441-0010/BKN](#) [PHP-6P6C-5](#) [GAX-3-66](#) [GAX-8-62](#) [GDCX-PN-66](#) [GLX-A-44](#) [GLX-N-1010M-BLK](#) [GMX-SMT4-N-88](#) [GSGX-N-2-88](#) [GSGX-N-4-88](#) [GSX-NS2-88-3.05](#) [GSX-NS-88-3.68](#) [PT-108A-8C-UL](#) [PTS-J531-8CS-50UL](#) [1-1775629-2](#) [A-2014-0-4](#) [GWLX-S9-88-YG](#) [DC-1021-8-WH-6](#) [1300530003](#) [1324640-4](#) [RJ11FTVC2G](#) [RJ11FTVC2N](#) [RJFTVX2SA1G](#) [132764-001](#) [1413235](#) [MPS88RX-5000](#) [E5288-S000K3-L](#) [155302-001](#) [AX101050](#) [AX101063](#) [AX101065](#) [AX101072](#) [AX101307](#) [AX101314](#) [AX101315](#) [AX101318](#) [AX102271](#) [AX102288](#) [AX102651](#) [AX102660](#) [HXJ5EOR](#) [J0012D21NL](#) [J0026D01ENL](#) [PC4D0018P](#) [8949-B88/6](#) [2-6609208-5](#) [937-SP-3088-2PC-A192](#) [303066VFL](#) [303068V](#)