



| REV. | DESCRIPTION | DRAWN         | CHECKED | APPROVED |
|------|-------------|---------------|---------|----------|
| A    | NEW RELEASE | JLZ 08/19/16' | ~       |          |

NOTES:

- ELECTRICAL CHARACTERISTICS:
  - CONTACT RESISTANCE: 20mΩ Max.
  - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
  - INSULATION RESISTANCE: 1000MΩ Min.
  - VOLTAGE RATING:125V.
  - CURRENT RATING:1.5A.
- ENVIRONMENT CHARACTERISTICS:
  - TEMPERATURE: -40°C~+85°C.
- MATERIALS
  - CONTACT MATERIAL: COPPER ALLOY.
  - CONTACT PLATING: GOLD.
  - INSULATOR MATERIALS: PBT OR NYLON BLACK.
- PRODUCT NUMBER CODE:

DS1131-02-X X X X X - X

- X Shell Type  
S:W/ Shrapnel  
N/A:W/O Shrapnel
- X Housing Materials  
N:Nylon  
P:PBT
- X Contact Plating  
8:Gold Flash
- X Housing Color  
B:Black
- X No.Of Contacts  
8:8p8c
- X Connector Type  
S:Socket

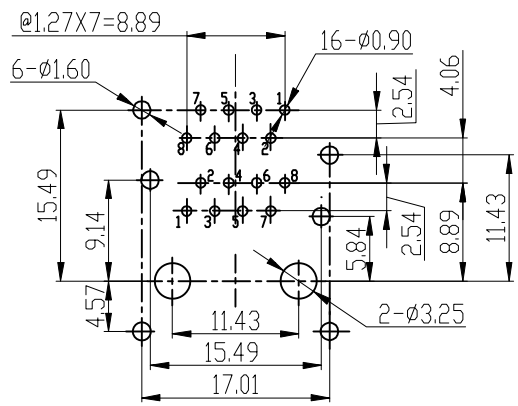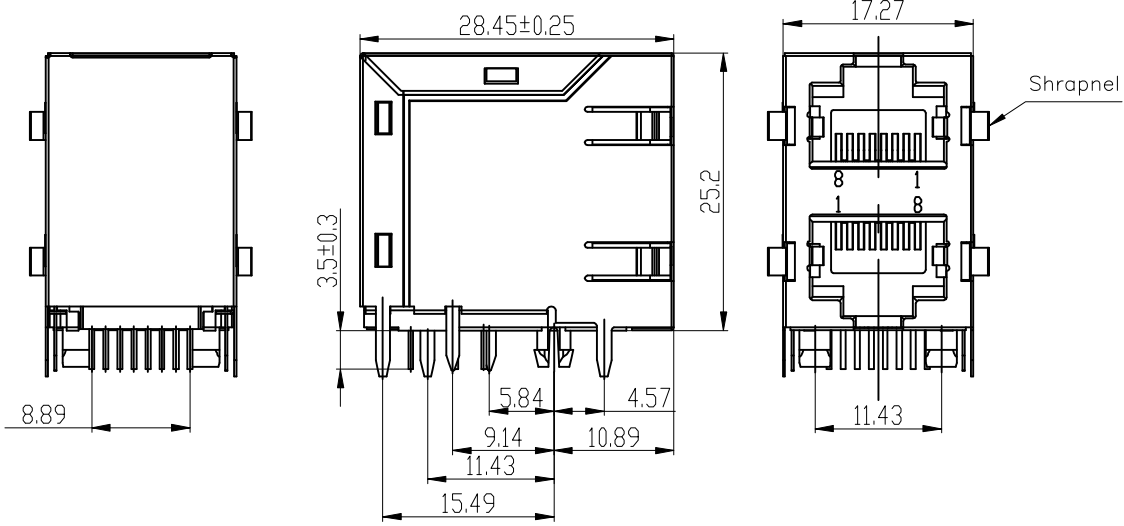

PCB LAYOUT  
THICKNESS=1.6mm

|                   |                       |                 |        |
|-------------------|-----------------------|-----------------|--------|
| GENERAL TOLERANCE |                       | ANGLE TOLERANCE |        |
| X.                | ±0.60                 | X.              | ±5°    |
| .X                | ±0.38                 | .X              | ±3°    |
| .XX               | ±0.25                 | .XX             | ±2°    |
| DRAWING TYPE      |                       | CUSTOMER        |        |
| SCALE             | 1:1                   | SHEET           | 1 OF 1 |
| DRAWING NO.       | C-DS1131-02-XXXXX-X-A |                 |        |

|            |    |        |  |  |
|------------|----|--------|--|--|
| PROJECTION |    | TITLE  | PCB Jack 8 Positions 2*1 Port W/ Shell 4.57mm Type |  |
| UNITS      | mm | SERIES | DS1131-02 SERIES                                   |  |
| SHEET SIZE | A4 |        |  |  |

**晨翔电子有限公司**  
**CONNFLY CONNFLY ELECTRONIC CO. LTD**

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Modular Connectors](#) / [Ethernet Connectors](#) category:*

*Click to view products by [Connfly](#) manufacturer:*

Other Similar products are found below :

[8949-H88/06BLKA/SN](#) [74441-0010/BKN](#) [PHP-6P6C-5](#) [GAX-3-66](#) [GDCX-PN-66](#) [GLX-A-44](#) [GLX-N-1010M-BLK](#) [GLX-S-88M-BLK](#)  
[GMX-SMT4-N-88](#) [GSGX-N-2-88](#) [GSGX-N-4-88](#) [GSX-NS2-88-3.05](#) [GSX-NS-88-3.68](#) [PT-108A-8C-UL](#) [PTS-J531-8CS-50UL](#) [A-2014-0-4](#)  
[GWLX-S9-88-YG](#) [DC-1021-8-WH-6](#) [1300530003](#) [1324640-4](#) [RJ11FTVC2N](#) [132764-001](#) [1413235](#) [MPS88RX-5000](#) [E5288-S000K3-L](#)  
[155302-001](#) [AX101050](#) [AX101063](#) [AX101065](#) [AX101072](#) [AX101307](#) [AX101315](#) [AX101318](#) [AX102271](#) [AX102288](#) [AX102651](#)  
[AX102660](#) [AX104024](#) [203475](#) [J0012D21NL](#) [J0026D01ENL](#) [PC4D0018P](#) [KIT38082NI](#) [8949-B88/6](#) [2-6609208-5](#) [303066VFL](#) [303068V](#)  
[303088LFLSA](#) [303088SBL](#) [30-8603](#)