

PMP

3.2Ø x 7.1 mm

Time-Lag Fuse



Agency Approvals

| Agency | Ampere Rating |
|--|----------------|
| Recognized Component for Canada and US | 375mA - 7A |
| PSE | 1A - 5A (125V) |

Electrical Characteristics

| Ampere Rating | Opening Time | | | | | | |
|---------------|--------------|-------|--------|--------|-------|-------|--------|
| | 1 In | 2 In | | 3 In | | 8 In | |
| | MIN | MIN | MAX | MIN | MAX | MIN | MAX |
| 375mA - 7A | 4 hr | 1 sec | 60 sec | 200 ms | 3 sec | 20 ms | 100 ms |

Interrupting Rating

| |
|--------------------------------|
| 50 amperes at 250V AC/ 125V DC |
|--------------------------------|

Product Characteristics


| | |
|-----------------------|---|
| Operating Temperature | -55 °C to 125 °C |
| Material | Body: Encapsulated, Epoxy-Coated Leads Wire: Tin Plated Copper |
| Leads Wire | Diameter Ø0.64mm |

| Catalog Number | Ampere Rating (A) | Voltage Rating (V) | Nominal Cold Resistance (Ohms) | Nominal Melting I ² t (A ² sec.) |
|----------------|-------------------|--------------------|--------------------------------|--|
| PMP .375 | 375mA | 250V | 0.3618 | 0.225 |
| PMP .500 | 500mA | | 0.2455 | 0.484 |
| PMP .600 | 600mA | | 0.2442 | 0.685 |
| PMP .750 | 750mA | | 0.1733 | 1.311 |
| PMP 001 | 1A | | 0.1109 | 2.304 |
| PMP 1.50 | 1.5A | | 0.0898 | 5.103 |
| PMP 002 | 2A | | 0.0457 | 8.748 |
| PMP 2.50 | 2.5A | | 0.0313 | 12.36 |
| PMP 003 | 3A | | 0.0242 | 13.37 |
| PMP 3.50 | 3.5A | | 0.0211 | 19.74 |
| PMP 004 | 4A | | 0.0158 | 22.18 |
| PMP 005 | 5A | | 0.0128 | 45.90 |
| PMP 007 | 7A | | 0.0090 | 91.26 |

Packaging

| Packaging Option | Quantity |
|------------------|-----------------|
| In Bulk | 2,000 pcs / box |

Mechanical Dimensions (mm)

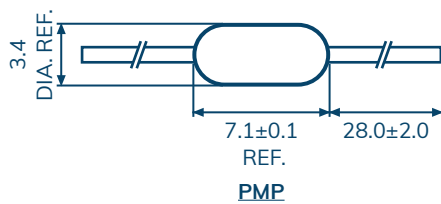

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Surface Mount Fuses](#) category:

Click to view products by [Conquer](#) manufacturer:

Other Similar products are found below :

[FHC20402ADTP](#) [NFVC6125S0R50TRF](#) [TF16SN2.00TTD](#) [FCC16501ABTP](#) [FCC16102ABTP](#) [FHC16322ADTP](#) [0308001.UR](#)
[FCC16202ABTP](#) [F0603G0R03FNTR](#) [7010.9962.63](#) [SEF 12A 65V \(G\)](#) [MST 250mA 250V](#) [TB60](#) [06 100.4](#) [TBF50](#) [TBF40](#)
[2010T315mA250V](#) [06 110.7](#) [12 100.1.5](#) [06 110.5](#) [1206FA-R250](#) [R06.100.6](#) [R12.100.15](#) [R06.000.0.375](#) [R06.000.6](#) [R06.100.0.25](#) [R12.000.8](#)
[R06.000.0.5](#) [R06.000.0.75](#) [R06.000.8](#) [R06.100.0.75](#) [R06.100.8](#) [R06.100.0.375](#) [R06.100.0.5](#) [R06.000.7](#) [R06.100.7](#) [S0603-S-2.0A](#) [F06F3.5](#)
[F12F20](#) [TA3VT2](#) [F12F1](#) [F06F7](#) [F06T3.5](#) [F06F0.375](#) [F06T8](#) [F12F30](#) [4T2A250V](#) [R12.100.7](#) [R12.100.30](#) [R06.000.0.25](#)