



CPS171

Consensic

Rev 0.0  
July 2018  
DAT-0021

# Data Sheet

## Manifold Absolute Pressure Sensor

# CPS171

Manifold Absolute Pressure Sensor



## Overview

The CPS171 is a resistive absolute pressure sensor solution with a fully calibrated pressure compensated analog output for low pressure applications, such as MAP (Manifold Absolute Pressure) systems.

The CPS171 solution comprises an ultra-small resistive MEMS pressure sensor and a conditioning ASIC for accurate pressure measurements in factory calibrated ranges for the MAP applications. An integrated sigma-delta based ADC combined with internal calibration logic provides a high level analog output signal that is proportional to the applied pressure.

## Applications

- Manifold Absolute Pressure
- Industrial Equipment
- Air Control Systems
- Vacuum Systems

## Benefits

- Low Power Consumption
- External Clock not Required
- High Resistance to Sensing Media

## Features

- Factory Calibrated Pressure Sensor
- Supply Voltage: 5.0V ±10%
- Operating Temperature Range: -40°C to +85°C
- Pressure Accuracy: <±0.8kPa (<±8.0mbar) @ 25°C


## Interfaces

- Analog Output: Typical 10% to 90% of V<sub>SUPPLY</sub>

## Physical Characteristics

- Small Form Factor, 3 x 5 x 1.2mm (w x l x h)
- LGA Package, 8 Lead
- Top Side Sensing Port

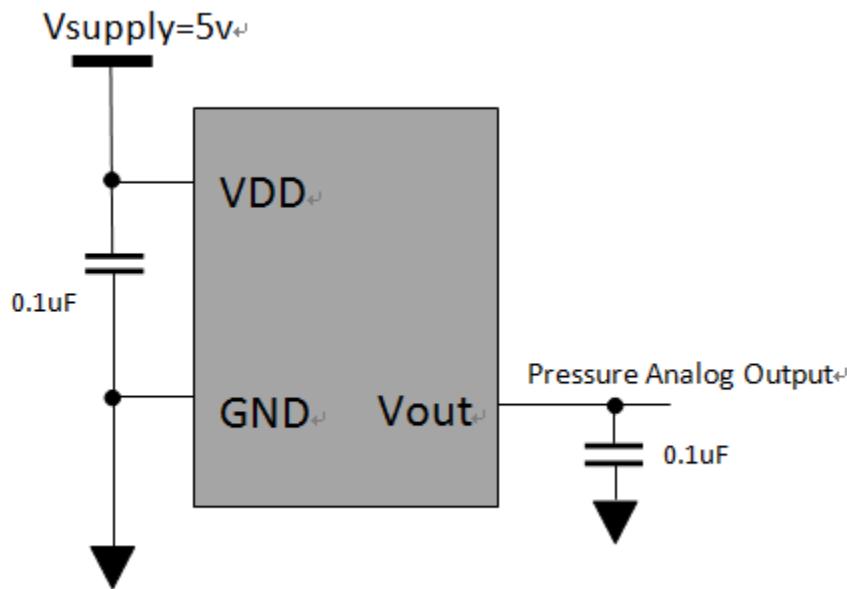

**FIGURE 1: CPS171 ANALOG OUTPUT CIRCUIT****TABLE1: ORDERING INFORMATION**

PART NUMBER	PRESSURE RANGE	OUTPUT	PACKAGE
CPS171	10 to 115kPa	Analog	8-Lead LGA, Metal Lid, PCB Substrate
<b>SALES and CONTACT INFORMATION</b> <a href="mailto:sales@consenstic.com">sales@consenstic.com</a> <a href="http://www.consenstic.com">www.consenstic.com</a>			
<b>United States</b> Consenic, Inc. 1900 Powell Street, Suite 600 Emeryville California, 94608, USA Ph: +1 510.588.8735	<b>China</b> Wuxi Consenstic Electronics Co., Ltd. 100 Dicui Road 530 Building B, Suite 704 Wuxi, Jiangsu Province, 214072 Ph: +86 510.85122279 Fax: +86 510.85122259		无锡康森斯克电子科技有限公司 无锡市滨湖区滴翠 路 100 号 530 大厦 B 栋 704 邮编 214072 電話: +86 510.85122279 传真: +86 510.85122259

## CONTENTS

1	OPERATING CHARACTERISTICS .....	6
1.1	ABSOLUTE RATINGS.....	6
1.2	OPERATING CONDITIONS .....	7
1.3	ELECTRICAL PARAMETERS .....	7
2	OUTPUT MODES.....	9
2.1	ANALOG OUTPUT .....	9
3	OPERATION MODE .....	10
4	OTP ROM.....	10
5	CALCULATING OUTPUT .....	10
5.1	PRESSURE OUTPUT .....	10
5.1.1	Pressure Output Transfer Function.....	10
6	PACKAGE AND ASSEMBLY .....	11
6.1	PIN LAYOUT .....	11
6.2	MECHANICAL DRAWING.....	12
6.3	SOLDERING CONDITIONS .....	13
7	DOCUMENT HISTORY .....	13
8	DISCLAIMER.....	14

## LIST OF TABLES

TABLE 1:	ORDERING INFORMATION .....	3
TABLE 2:	CPS171 PIN DESCRIPTION.....	12
TABLE 3:	MECHANICAL DIMENSIONS.....	13
TABLE 4:	PACKAGE REFLOW TEMPERATURE.....	13

## LIST OF FIGURES

FIGURE 1:	CPS171 ANALOG OUTPUT CIRCUIT.....	3
FIGURE 2:	EXAMPLE OF ANALOG OUTPUT VS. PRESSURE.....	9
FIGURE 3:	CPS171 PACKAGE PIN LAYOUT .....	11
FIGURE 4:	LGA WITH METAL LID PACKAGE .....	12

## 1 OPERATING CHARACTERISTICS

### 1.1 ABSOLUTE RATINGS

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Over Pressure					1000 (10)	kPa (bar)
Supply Voltage (with respect to GND)	$V_{DD}$		-0.3		6.0	V
Voltages at Analog I/O – In Pin	$V_{INA}$		-0.3		$V_{DD} +0.3$	V
Voltages at Analog I/O – Out Pin	$V_{OUTA}$		-0.3		$V_{DD} +0.3$	V
Storage Temperature	$T_{STOR}$		-50		130	°C

## 1.2 OPERATING CONDITIONS

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
<b>OPERATION</b>						
Supply Voltage to GND <sup>1</sup>	V <sub>S</sub>		4.75	5.0	5.25	V
Operating Temperature Range			-40		85	°C
<b>PRESSURE RANGE 1 CHARACTERISTICS (CPS171-JW001)</b>						
Range 1			10 (100)	—	115 (1150)	kPa (mbar)
Full Scale Output	V <sub>FSO</sub>	@V <sub>S</sub> =5.0V	—	4.7	—	V
Full Scale Span	V <sub>FSS</sub>	@V <sub>S</sub> =5.0V	—	4.5	—	V
Accuracy		(0 to 85°C)	—	—	±1.5	%V <sub>FSS</sub>
Sensitivity	V/P		—	45	—	mV/kPa

## 1.3 ELECTRICAL PARAMETERS

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
<b>SUPPLY CURRENT</b>						
Update Mode Current	I <sub>DD</sub>	Worst Case Settings: 12-bit, 0ms Power Down		1200	1500	µA
<b>ANALOG OUTPUT</b>						
CPS171	Analog_P	10 to 115kPa (100 to 1150mbar)	0.4		4.65	V
<b>Analog OUTPUT</b>						
Resolution	RES			12		Bits
Analog Additional Error (Including Ratiometricity Error)	Eout	-40 to 125°C		0.1	0.5	%
<b>SYSTEM</b>						
Trimmed System Frequency	f <sub>sys</sub>	All Timing in this Specification are Subject to this Variation		1.85		MHz
Start-Up-Time Power-On to Data Ready	t <sub>STA</sub>	Fastest and Slowest Settings	4.25		173	ms
Update Rate (Normal Mode)	T <sub>RESP_UP</sub>	Fastest and Slowest Settings	0.70		288	ms
Peak-to-Peak Noise @ Output (100 Measurements in 12-bit)	N <sub>OUT</sub>			5		LSB

# CPS171

Manifold Absolute Pressure Sensor




Consenic

## 2 OUTPUT MODES

### 2.1 ANALOG OUTPUT

The CPS171 provides a ratio metric analog output to applied pressure.

FIGURE 2: EXAMPLE OF ANALOG OUTPUT VS. PRESSURE

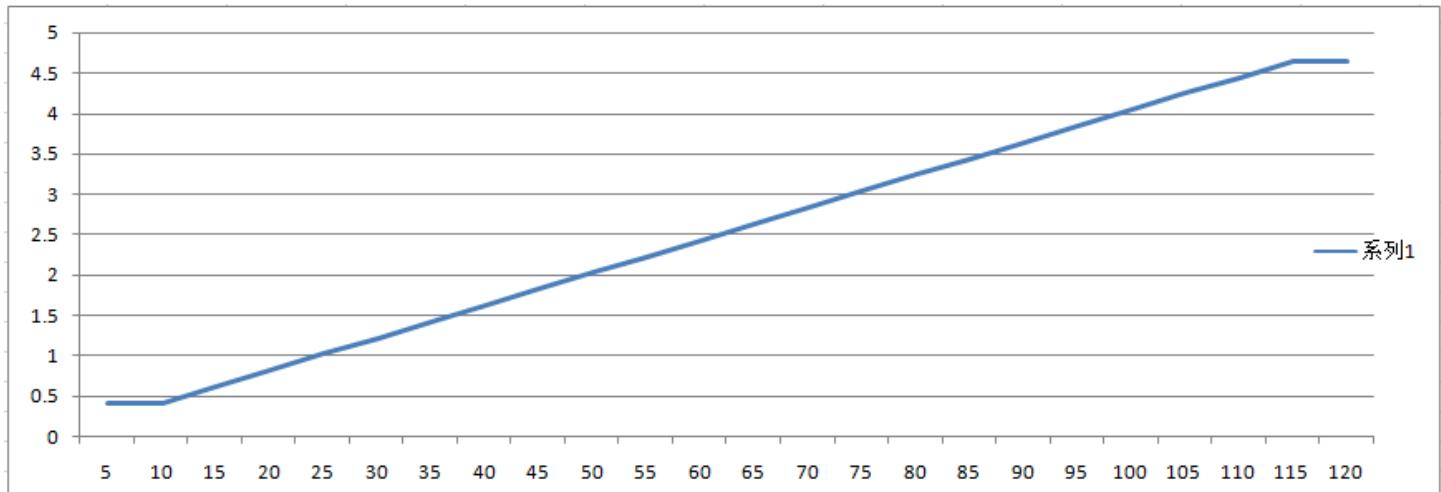

## 3 OPERATION MODE

The CPS171 is factory programmed in Update Mode only. Measurements are taken continuously.

## 4 OTP ROM

The OTP ROM array contains the sensor calibration coefficients and the configuration bits for the analog front end, output modes, measurement modes, etc.

## 5 CALCULATING OUTPUT

The pressure output is a linear transfer function between measured pressure and the input voltage.

### 5.1 PRESSURE OUTPUT

#### 5.1.1 Pressure Output Transfer Function


$$\text{Pressure (kPa)} = (\text{Vout} / 0.040476) + 0.117647$$

## 6 PACKAGE AND ASSEMBLY

The CPS171 is available in a small land grid array (LGA) package with a metal lid. There is a hole on the lid to allow for external pressure to the sensing diaphragm.

### 6.1 PIN LAYOUT


FIGURE 3: CPS171 PACKAGE PIN LAYOUT

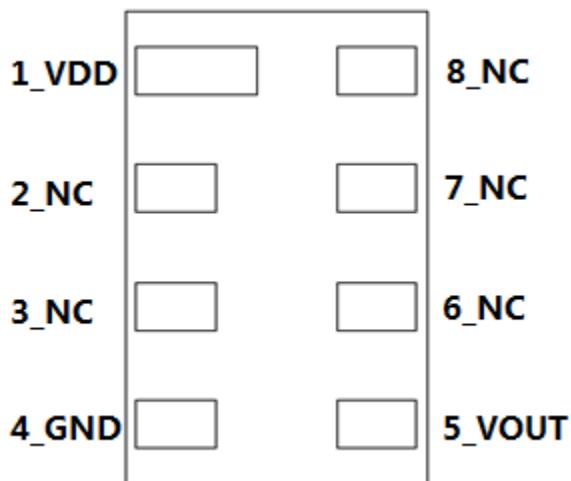

**TABLE 2: CPS171 PIN DESCRIPTION**

Pin	Name	Type	Function
1	VDD	P	Connect 0.1uF CAP to GND
2	NC	--	--
3	NC	--	--
4	GND	G	Ground
5	VOUT	O	Voltage output
6	NC	--	Factory use only
7	NC	--	Factory use only
8	NC	--	--

## 6.2 MECHANICAL DRAWING

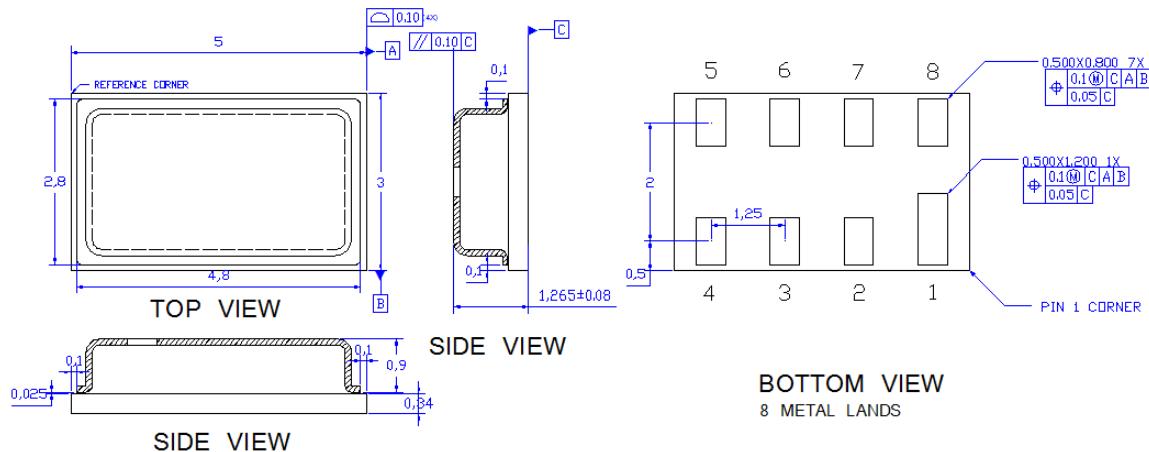**FIGURE 4: LGA WITH METAL LID PACKAGE**

**TABLE 3: MECHANICAL DIMENSIONS**

DIMENSION	MIN.	TYP.	MAX.	UNITS
Length		5		mm
Width		3		mm
Height		1.265		mm
Pad 1 Length		0.5		mm
Pad 1 Width		1.2		mm
Pad 2 to 8 Length		0.5		mm
Pad 2 to 8 Width		0.8		mm
Pad Pitch(Y-Axis)		2		mm
Pad Pitch(X-Axis)		1.25		mm
Port Hole Diameter		0.5		mm

## 6.3 SOLDERING CONDITIONS

**TABLE 4: PACKAGE REFLOW TEMPERATURE**

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
Soldering Peak Temperature	Less than 30 seconds (JEDEC-STD-020 Standard)			260	°C

## 7 DOCUMENT HISTORY

REVISION	DATE	DESCRIPTION
0.0	12-July-2018	Preliminary Release

## 8 DISCLAIMER

Information in this datasheet is provided solely to enable implementation and use of Consenic products. The specifications and characteristics are subject to change without notice. Consenic reserves the right to make changes without further notice to any products herein.

"Typical" parameters provided in this datasheet can and do vary in different applications and actual performance may vary over time. Customers must validate all operating parameters for their application.

Consenic is not responsible for direct, indirect, incidental or consequential damages resulting from any defect, error or failure to perform. In no event, regardless of cause, shall Consenic incur any liability for any damages of any kind, including, but not limited to, any direct, indirect, special, incidental, punitive or consequential damages arising out of, resulting from, or any way connected to the use of the product, whether arising under breach of contract, tort (including negligence), strict liability or otherwise, and whether based on this agreement or otherwise, even if advised of the possibility of such damages, and whether or not injury was sustained by persons or property or otherwise; and whether or not loss was sustained from, or arose out of, the results of, the product, or any services that may be provided by Consenic.

The customer assumes all responsibility and liability for proper and safe handling of the goods. It is the customer's responsibility to take any and all appropriate precautions with regard to electrostatic discharge. Also be aware that the products herein may not be regulatory compliant or agency certified (FCC, UL, CE, etc.).

No License is granted under any patent right or other intellectual property whatsoever. Consenic assumes no liability for applications assistance, customer product design, software performance, or infringement of patents or any other Intellectual property rights of any kind.

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for Board Mount Pressure Sensors category:***

***Click to view products by Consenstic manufacturer:***

Other Similar products are found below :

[80527-25.0H2-05](#) [80541-B00000150-01](#) [80541-B00000200-05](#) [80554-00700100-05](#) [80568-00300050-01](#) [81618-B00000040-01](#) [81739-B00000900-01](#) [81807-B00000020-01](#) [81808-B00000150-14](#) [82903-B00000020-01](#) [93.631.4253.0](#) [93.731.4353.0](#) [93.932.4553.0](#) [136PC150G2](#) [136PC15A1](#) [142PC95AW71](#) [142PC05DW70](#) [MPXV2202DPT1](#) [15PSI-G-4V](#) [1805-01A-L0N-B](#) [2000317-1](#) [26PCBKT](#) [26PCCFA6D26](#) [26PCCFS2G](#) [26PCCVA6D](#) [93.632.7353.0](#) [93.731.3653.0](#) [93.931.4853.0](#) [93.932.4853.0](#) [SCDA120-XSC05DC](#) [SP370-23-156-0](#) [185PC30DH](#) [192992-0059](#) [20INCH-G-MV-MINI](#) [26PCAFJ3G](#) [26PCAFS2G54](#) [26PCCEP5G24](#) [26PCJEU5G19](#) [30INCH-D1-MV-MINI](#) [ASCX15AN-90](#) [TSCSAAN001PDUCV](#) [DCAL401DN](#) [DCAL401GN](#) [XZ202798SSC](#) [XZ203676HSC](#) [SP370-25-116-0](#) [81717-00000050-05](#) [81794-B00001200-01](#) [HSCDLNN100PGAA5](#) [81618-B00000040-05](#)