


Coral

Environmental Sensor Board Datasheet

Version 1 (March 2019)

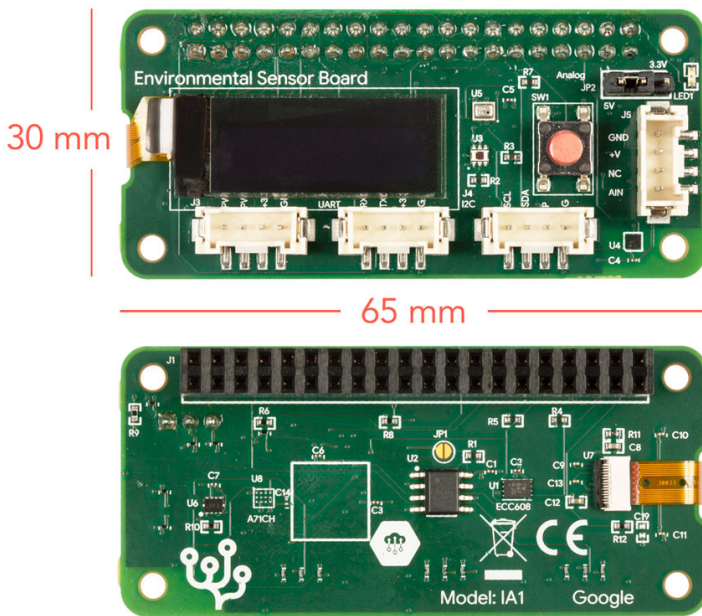

Features

- 128x32 OLED display
- Ambient light sensor (OPT3002)
- Barometric pressure sensor (BMP280)
- Humidity / temperature sensor (HDC2010)
- Cryptoprocessor (ATECC608A) with Google keys
- 40-pin GPIO female connector
- Four Grove connectors:
 - 1x UART
 - 1x I2C
 - 1x PWM
 - 1x 3.3/5V analog
- General purpose button
- General purpose LED

Overview

The Environmental Sensor Board is an add-on board (also known as a pHAT or bonnet) that adds sensing capabilities to your Coral Dev Board or Raspberry Pi projects. (It includes an EEPROM for compatibility with Raspberry Pi boards.)

The board provides atmospheric data such as light level, barometric pressure, temperature, and humidity. You can also attach additional sensors with the Grove connectors.

The board also includes a secure cryptoprocessor with Google keys to enable connectivity with [Google Cloud IoT Core](#) services, allowing you to securely connect to the device and then collect, process, and analyze the sensor data.

Table of contents

- Dimensions
- Requirements
- Sensors
- Grove connectors
- OLED display
- Secure cryptoprocessor
- Header pinout
- I2C address reference
- Certifications

Dimensions

Measurement	Value
Board size	Board w/ components: 65 x 30 x 18.46 mm 40-pin header height: 8.5 mm
Hole size/spacing	Diameter: 2.4 mm Horizontal spacing: 58 mm Vertical spacing: 23 mm
Weight	14 g

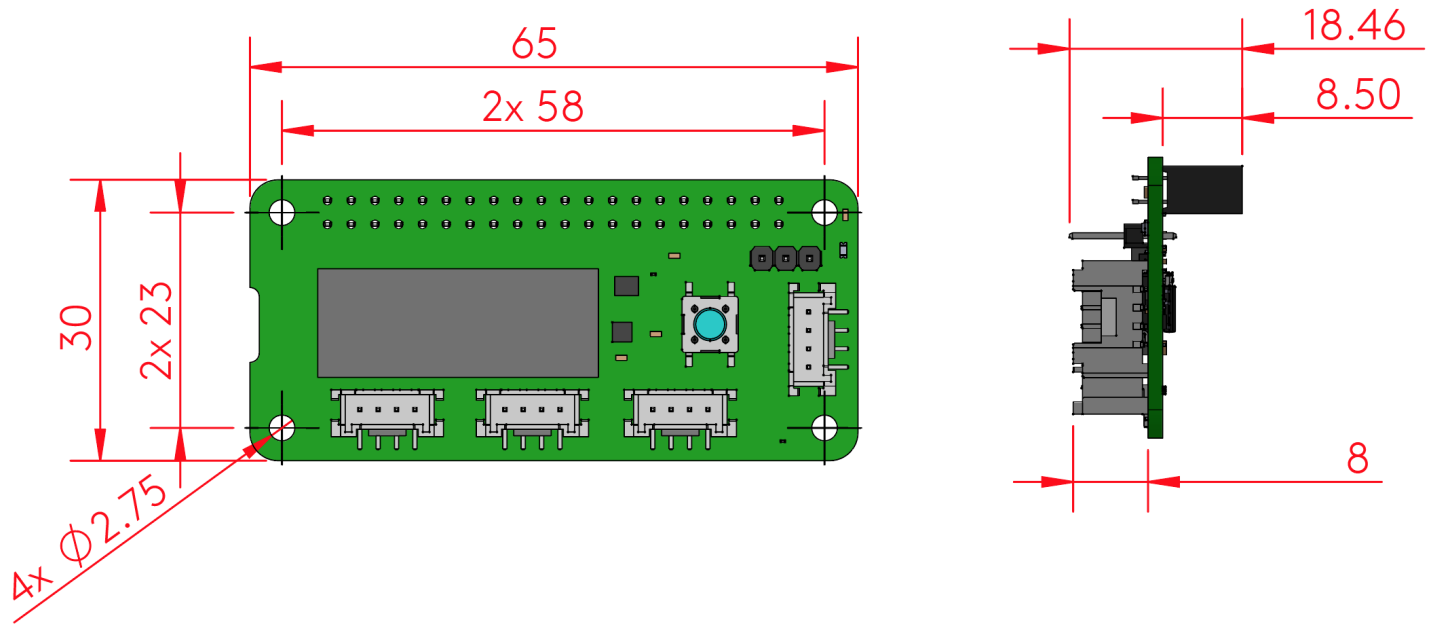


Figure 1. Board and mounting hole dimensions (in millimeters)

Requirements

The board must be connected to a host with I2C, SPI, and 3.3V power. The 40-pin GPIO header and provided software are designed to work with the Coral Dev Board or Raspberry Pi (running Mendel Linux or Raspbian, respectively).

Sensors

All sensors are connected to the I2C lines from header pins 3 and 5 (see the [header pinout](#)).

Sensor	Details
Humidity and temperature sensor	<p>Texas Instruments HDC2010:</p> <ul style="list-style-type: none">• Humidity range/accuracy: 0 - 100% \pm 2% (typical)• Temperature range/accuracy: -40 - 125°C (functional) \pm0.2°C (typical) <p>I2C address: 0x40</p>
Ambient light sensor	<p>Texas Instruments OPT3002:</p> <ul style="list-style-type: none">• Optical spectrum: 300 - 1000 nm• Measurement range: 1.2 - 10 mW/cm² <p>I2C address: 0x45</p>
Barometric pressure sensor	<p>Bosch Sensortec BMP280:</p> <ul style="list-style-type: none">• Operation range: 300 - 1100 hPa• Absolute accuracy (@ 0 - 65°C): \sim \pm1 hPa• Relative accuracy (@ 700-900 hPa; 25 - 40°C): \pm 0.12 hPa (typical) <p>I2C address: 0x76</p>

Grove connectors

The Grove connectors provide easy access to the PWM, UART, and I2C pins from the baseboard, plus an on-board analog-to-digital converter (ADC), as illustrated in figure 2.

To interact with the AIN0 analog source, use address 0x49 on the I2C lines from header pins 3 and 5 (see the [header pinout](#)).

Note: The VDD_A pin on the analog Grove connector can be powered by either the 5V or 3.3V power rail by the jumper pins indicated in figure 2 as the ANALOG VDD JUMPER.

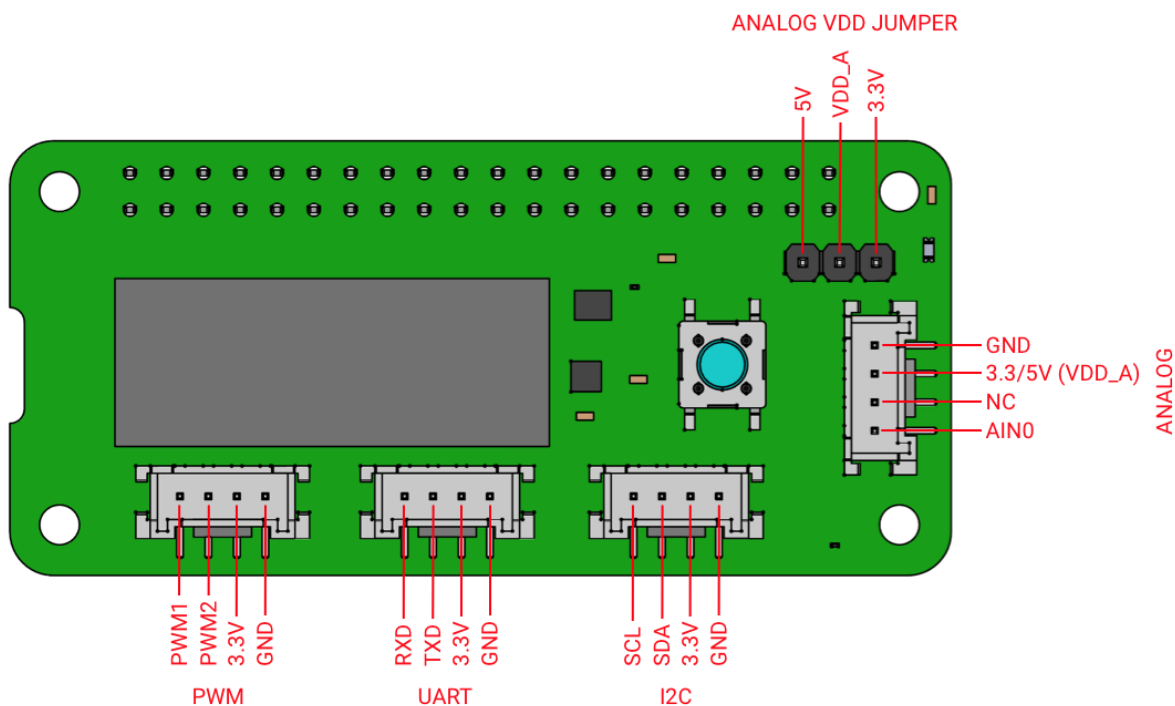


Figure 2. Pin functions for each Grove connector

OLED display

The 128x32 OLED display is driven by the SSD1306 control chip, connected with the SPI interface.

SPI function	Pin
MOSI	19
MISO	21
SCLK	23
CL	24
RESET	22
DC	18

Secure cryptoprocessor

The board includes a secure cryptoprocessor (ATECC608A) with an EEPROM that can store up to 16 keys (256-bit), certificates, or other data. Although this chip provides a range of cryptographic features, it is primarily included to provide secure key generation and management so you can securely authenticate with the device when deployed into the field.

The factory setting for the Environmental Sensor Board includes one Google key (private key, public key, and certificate) to enable communication with [Google Cloud IoT Core](#) right out of the box. This key slot is reusable, just like the rest of the memory, so you don't have to keep it.

Header pinout

Figure 3 shows which pins from the baseboard are used by the Environmental Sensor Board. Pins highlighted in dark green are used by the board and not available to you (except through software for the corresponding functions), while the pins in light green are used by the board but are still available to you through the Grove connectors.

RPI PIN NAME	FUNCTION	Environmental Sensor Board		FUNCTION	RPI PIN NAME
	3v3 Power	1		2	5v Power
GPIO 02	I2C SDA (Grove)	3		4	5v Power
GPIO 03	I2C SCL (Grove)	5		6	Ground
GPIO 04		7		8	UART TXD (Grove) GPIO 14
	Ground	9		10	UART RXD (Grove) GPIO 15
GPIO 17		11		12	PWM1 (Grove) GPIO 18
GPIO 27	(OPT3002_INT)	13		14	Ground
GPIO 22		15		16	GPIO (Button) GPIO 23
	3v3 Power	17		18	GPIO (OLED_DC) GPIO 24
GPIO 10	SPI MOSI (OLED)	19		20	Ground
GPIO 09	SPI MISO (OLED)	21		22	GPIO (OLED_RESET) GPIO 25
GPIO 11	SPI SCLK (OLED)	23		24	SPI CS (OLED) GPIO 08
	Ground	25		26	SPI CE1 GPIO 07
GPIO 00	I2C (EEPROM)			28	I2C (EEPROM) GPIO 01
GPIO 05	(A271CH_RST_N)	29		30	Ground
GPIO 06		31		32	GPIO 12
GPIO 13	PWM2 (Grove)	33		34	Ground
GPIO 19	(HDC2010_DRDY)	35		36	GPIO 16
GPIO 26		37		38	GPIO 20
	Ground	39		40	(LED1) GPIO 21

Figure 3. Pins used by the board

I2C address reference

Device	Address
Humidity/temp sensor	0x40
Ambient light sensor	0x45
Barometric pressure sensor	0x76
Analog Grove connector	0x49
Cryptoprocessor	0x30

Certifications

Market	Certifications
USA	FCC
European Union	CE

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Single Board Computers](#) category:

Click to view products by [Coral](#) manufacturer:

Other Similar products are found below :

[MANO882VPGGA-H81](#) [SSD3200W-S-SLC-INN 20-101-0738](#) [MVME61006E-2173R](#) [SHB230DGGA-RC](#) [IMB210VGGA](#) [MI958F-16C](#)
[S2600STB](#) [BBS2600BPS](#) [BLKNUC7I3DNHNC1978015](#) [IOT-LS1012A-OXALIS](#) [NITX-300-ET-DVI 102110548](#) [BEAGLEBOARD](#)
[POCKET](#) [BPI-M5](#) [GENE-APL5-A12-F002](#) [UPN-EHLCN2-A10-0232](#) [UPN-EHLPJ4-A10-0432](#) [MICROSOM I2 + WIFI/BT](#)
[HUMMINGBOARD-I2EX BASE + WIFI/BT](#) [HUMMINGBOARD-I4 PRO + WIFI/BT](#) [VAB-600-B](#) [RT5350F-OLINUXINO-EVB](#) [MITX-](#)
[440-DVI-2E](#) [ATCA-7365-D-24GB](#) [NITX-315-DEVKIT](#) [A13-SOM-512](#) [NITX-315](#) [BANANA PI BPI-M1+](#) [A13-SOM-WIFI-4GB](#) [AM3359-](#)
[SOM-EVB-IND](#) [UPS-APLC2-A10-0432](#) [DFR0419](#) [UPS-APLP4-A10-0864](#) [UPS-APLP4-A10-0432](#) [UPS-APLP4-A10-08128](#) [MI977F-Q27](#)
[BBBLUE](#) [IB811F-I30](#) [DFR0546](#) [DFR0470-ENT](#) [Nit6Q_i](#) [M2M \(TELIT\)](#) [RELAY PROFESSIONAL](#) [GCS22.2.080.2.2.I](#) [GCS22.8.100.4.2.I](#)
[GLS11.2.053.2.2.E](#) [SLS16Y2_792C_512R_SD_1WB_C_B](#) [A20-OLINUXINO-LIME-E16GS16M](#)