

SMH

Aluminum Electrolytic Capacitors

+105°C General Purpose Surface Mount



FEATURES


Small Size - Extended Life - Low Cost

APPLICATIONS

Filtering - Bypass - Coupling - Blocking

Operating Temperature Range		-55°C to +105°C								
Capacitance Tolerance		+20% at 120 Hz, 20°C								
Surge voltage	WVDC	6.3	10	16	25	35	50			
	SVDC	7.9	13	20	32	44	63			
Dissipation Factor	WVDC	6.3	10	16	25	35	50			
	tan δ	.3	.22	.18	.14	.12	.12			
Leakage current		2 Minutes								
		.01CV or 3uA, Whichever is greater								
Low temperature stability Impedance ratio (120 Hz)	Rated WVDC	6.3	10	16	25	35	50			
	-25°C to +20°C	4	3	2	2	2	2			
	-40°C to +20°C	8	6	4	4	3	3			
Load Life		1000 hours at 105°C with rated WVDC and ripple current applied								
		Capacitance change	≤25% of initial measured value							
		Dissipation factor	≤200% of maximum specified value							
		Leakage current	≤100% of maximum specified value							
Shelf Life		1000 hours at 85°C with no voltage applied								
		Capacitance change	≤25% of initial measured value							
		Dissipation factor	≤200% of maximum specified value							
		Leakage current	≤100% of maximum specified value							
Resistance to soldering heat		Capacitors placed on a 250°C hot plate for 30 seconds with their electrode terminations facing downward will fulfill the following conditions after being cooled to room temperature								
		Capacitance change	≤10% of initial measured value							
		Dissipation factor	≤100% of maximum specified value							
		Leakage current	≤100% of maximum specified value							
Ripple Current Multipliers		Frequency (Hz)					Temperature (°C)			
		50	120	400	1k	10k	100k	105	85	70
		0.8	1.0	1.0	1.1	1.3	1.5	1.0	1.0	1.0

Special Order Options

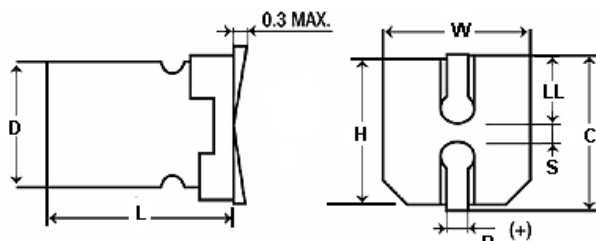

D	L	W±0.2	H±0.2	C±0.2	R	LL±0.2	S±0.2
4	5.4 +0.1/-0.2	4.3	4.3	5.0	0.5-0.8	1.8	1.0
5	5.4 +0.1/-0.2	5.3	5.3	6.0	0.5-0.8	2.1	1.4
6.3	5.4 +0.1/-0.2	6.6	6.6	7.3	0.5-0.8	2.4	2.2
6.3	5.8 +0.1/-0.2	6.6	6.6	7.3	0.5-0.8	2.4	2.2
6.3	7.7 +0.1/-0.2	6.6	6.6	7.3	0.5-0.8	2.4	2.2
8	6.2 +0.1/-0.2	8.3	8.3	9.0	0.7-1.0	2.9	3.2
8	10.5+0.1/-0.2	8.3	8.3	9.0	0.7-1.0	2.9	3.2
10	10.5+0.1/-0.2	10	10	11.0	0.7-1.0	3.2	4.6

SMH

+105°C, General Purpose,
1000 hours

WVDC	Capacitance (µF)	IC PART NUMBER	Maximum ESR (Ω) 120 Hz, +20°C	Maximum RMS Ripple Current (mA) 120 Hz, +105°C	Dims DxL (mm)
6.3	22	226SMH6R3M	21.1	29	4x5.4
6.3	47	476SMH6R3M	9.877	46	5x5.4
6.3	100	107SMH6R3M	4.642	71	6.3x5.4
6.3	330	337SMH6R3M	1.407	105	6.3x7.7
6.3	1000	108SMH6R3M	0.4642	340	8x10.5
6.3	1500	158SMH6R3M	0.3316	475	10x10.5
10	33	336SMH010M	12.06	34	5x5.4
10	150	157SMH010M	2.653	86	6.3x6
16	10	106SMH016M	33.157	28	4x5.4
16	22	226SMH016M	15.07	39	5x5.4
16	33	336SMH016M	33.158	35	5x5.4
16	47	476SMH016M	7.055	70	6.3x5.4
16	100	107SMH016M	3.3157	70	6.3x5.4
16	150	157SMH016M	2.21	95	6.3x7.7
16	220	227SMH016M	1.507	120	6.3x7.7
16	330	337SMH016ML10	1.005	195	10x10.5
16	470	477SMH016M	0.7055	340	8x10.5
16	680	687SMH016M	0.488	310	10x10.5
25	33	336SMH025M	8.038	65	6.3x5.4
25	100	107SMH025M	2.653	100	6.3x7.7
25	220	227SMH025MFE	1.2057	320	8x10.5
25	220	227SMH025ML10	1.2057	435	10x10.5
25	330	337SMH025M	0.8038	220	8x10.5
25	470	477SMH025M	0.5644	490	10x10.5
35	4.7	475SMH035M	49.383	22	4x5.4
35	10	106SMH035M	23.21	30	5x5.4
35	22	226SMH035M	10.55	60	6.3x5.4
35	33	336SMH035M	7.033	42	6.3x5.4
35	33	336SMH035MFT	23.211	84	8x6.5
35	47	476SMH035M	4.938	80	6.3x7.7
35	220	227SMH035M	1.06	190	8x10.5
35	330	337SMH035M	0.704	450	10x10.5
50	0.1	104SMH050M	1989.44	2.3	4x5.4
50	0.22	224SMH050M	904.29	3.4	4x5.4
50	0.33	334SMH050M	602.86	4.1	4x5.4
50	0.47	474SMH050M	423.28	5	4x5.4
50	1	105SMH050M	198.94	10	4x5.4
50	2.2	225SMH050M	90.43	16	4x5.4
50	3.3	335SMH050M	60.286	16	4x5.4
50	4.7	475SMH050M	42.33	23	5x5.4
50	10	106SMH050M	19.894	32	6.3x5.4
50	22	226SMH050M	9.04	32	6.3x5.8
50	33	336SMH050M	6.03	70	6.3x7.7
50	47	476SMH050M	4.23	80	6.3x7.7
50	100	107SMH050M	1.989	230	8x10.5
50	220	227SMH050M	0.904	375	10x10.5

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Aluminium Electrolytic Capacitors - SMD category](#):

Click to view products by [Cornell Dubilier manufacturer](#):

Other Similar products are found below :

[EEV-FK1E332W](#) [ULV2H1R8MNL1GS](#) [MAL214099813E3](#) [CA025M4R70REB-0405](#) [HUB1800-S](#) [34610](#) [RYK-50V101MG5TT-FL](#)
[107AXZ016MQ5](#) [RVJ-50V101MH10U-R](#) [EMVH101GRA221MMN0S](#) [MAL214097402E3](#) [MAL215375471E3](#) [MAL224699909E3](#)
[MAL224699813E3](#) [MAL215099017E3](#) [MAL215099818E3](#) [AEH1010331M025R](#) [AEA1010102M016R](#) [AEH1012471M016R](#)
[MAL213967339E3](#) [ZSC00AF2211EARL](#) [VB1E100MB054000CE0](#) [RVT1000UF10V34RV0081](#) [XT100UF50V90RV0067](#)
[RVE100UF16V67RV0046](#) [XT47UF50V90RV0082](#) [XT22UF50V90RV0083](#) [RST22UF50V026](#) [RST10UF16V013](#) [RST100UF25V004](#)
[RST100UF35V009](#) [RST47UF25V035](#) [RST47UF50V038](#) [RST220UF25V019](#) [RSL220UF25V021](#) [XT10UF25V90RV0068](#)
[FZ100UF50V90RV0066](#) [RST100UF16V003](#) [XT100UF10V90RV0060](#) [XT100UF16V90RV0061](#) [RT100UF35V90RV0102](#)
[XT100UF35V90RV0065](#) [FZ100UF35V90RV0064](#) [XT100UF25V90RV0062](#) [XT220UF10V90RV0073](#) [XT220UF35V90RV0076](#)
[XT470UF6.3V90RV0128](#) [LZ47UF35V90RV0123](#) [XT330UF25V90RV0127](#) [XT47UF35V90RV0081](#)