



## Aluminum Electrolytic Capacitors

+85°C 5mm Height, Low Profile, Radial Lead




### FEATURES

5mm Height - Lead Free Leads

### APPLICATIONS

Filtering - Bypass - Coupling - Blocking

Operating Temperature Range		-40°C to +85°C									
Capacitance Tolerance		+20% at 120 Hz, 20°C									
Surge voltage	WVDC	4	6.3	10	16	25	35	50			
	SVDC	5.2	7.9	13	20	32	44	63			
Dissipation Factor	WVDC	4	6.3	10	16	25	35	50			
	$\tan \delta$	.35	.35	.24	.2	.16	.12	.1			
Leakage current		2 Minutes									
		.01CV or 3uA, Whichever is greater									
Low temperature stability Impedance ratio (120 Hz)	Rated WVDC	4	6.3	10	16	25	35	50			
	-25°C to +20°C	7	4	3	2	2	2	2			
	-40°C to +20°C	15	8	6	4	4	3	3			
1000 hours at 85°C with rated WVDC applied											
Load Life		Capacitance change <20% of initial measured value									
		Dissipation factor <200% of maximum specified value									
		Leakage current <100% of maximum specified value									
Shelf Life		1000 hours at 85°C with no voltage applied									
		Capacitance change <20% of initial measured value									
		Dissipation factor <200% of maximum specified value									
		Leakage current <100% of maximum specified value									
Ripple Current Multipliers		Frequency (Hz)					Temperature (°C)				
		50	120	400	1k	10k	100k	85	70	60	30
		0.8	1.0	1.3	1.45	1.65	1.7	1.0	1.3	1.5	1.8

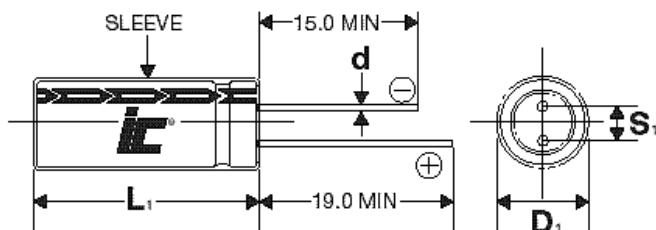

D+0.5	4	5	6.3	8
S	1.5	2	2.5	3.5
d	.45	.45	.45	.5

L<sub>1</sub>=L+1mm  
S<sub>1</sub>=S±0.5mm

Americas / EU  
Phone: 1-508-996-8561  
Email: cdema@cde.com



Asia  
Phone: 852-2793-0931  
Email: cdeasia@cde.com



Sep-20

# SVF

+85°C, 5mm Height Low  
Profile Radial Lead Aluminum  
Electrolytic Capacitors

WVDC	Capacitance ( $\mu$ F)	IC PART NUMBER	Maximum ESR ( $\Omega$ ) 120 Hz, +20°C	Maximum RMS Ripple Current (mA) 120 Hz, +85°C	Dims DxL (mm)
4	47	<b>476SVF004M</b>	12.346	33	4x5
4	68	<b>686SVF004M</b>	8.533	47	5x5
4	220	<b>227SVF004M</b>	2.638	96	6.3x5
6.3	330	<b>337SVF6R3M</b>	1.206	145	8x5
10	22	<b>226SVF010M</b>	15.072	36	4x5
10	33	<b>336SVF010M</b>	10.048	41	4x5
10	47	<b>476SVF010M</b>	7.055	52	5x5
10	220	<b>227SVF010M</b>	1.507	135	8x5
16	33	<b>336SVF016M</b>	8.038	49	5x5
16	68	<b>686SVF016M</b>	3.901	80	6.3x5
16	100	<b>107SVF016M</b>	2.653	80	6.3x5
25	6.8	<b>685SVF025M</b>	34.13	21	4x5
25	10	<b>106SVF025M</b>	23.21	25	4x5
25	15	<b>156SVF025M</b>	15.473	35	5x5
25	22	<b>226SVF025M</b>	10.55	37	5x5
25	47	<b>476SVF025M</b>	4.938	70	6.3x5
25	68	<b>686SVF025M</b>	3.413	100	8x5
25	100	<b>107SVF025M</b>	2.321	110	8x5
35	6.8	<b>685SVF035M</b>	29.256	26	5x5

WVDC	Capacitance ( $\mu$ F)	IC PART NUMBER	Maximum ESR ( $\Omega$ ) 120 Hz, +20°C	Maximum RMS Ripple Current (mA) 120 Hz, +85°C	Dims DxL (mm)
35	10	<b>106SVF035M</b>	19.894	29	5x5
35	33	<b>336SVF035M</b>	6.029	62	6.3x5
35	47	<b>476SVF035M</b>	4.233	80	8x5
50	0.1	<b>104SVF050M</b>	1989.4	1.5	4x5
50	0.15	<b>154SVF050M</b>	1326.29	4	4x5
50	0.22	<b>224SVF050M</b>	904.289	2.6	4x5
50	0.33	<b>334SVF050M</b>	602.86	3.2	4x5
50	0.47	<b>474SVF050M</b>	423.284	4	4x5
50	1	<b>105SVF050M</b>	198.94	8	4x5
50	2.2	<b>225SVF050M</b>	90.429	13	4x5
50	3.3	<b>335SVF050M</b>	60.286	17	4x5
50	4.7	<b>475SVF050M</b>	42.328	20	4x5
50	6.8	<b>685SVF050M</b>	29.259	4	6.3x5
50	10	<b>106SVF050M</b>	19.894	33	6.3x5
50	15	<b>156SVF050M</b>	13.263	48	6.3x5
50	22	<b>226SVF050M</b>	9.043	40	6.3x5
50	22	<b>226SVF050MD8</b>	9.043	52	8x5
50	33	<b>336SVF050M</b>	6.029	71	8x5

Americas / EU  
Phone: 1-508-996-8561  
Email: cdene@cde.com



Asia  
Phone: 852-2793-0931  
Email: cdeasia@cde.com

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for Aluminium Electrolytic Capacitors - Radial Leaded category:***

***Click to view products by Cornell Dubilier manufacturer:***

Other Similar products are found below :

[LXY50VB4.7M-5X11](#) [RFO-100V471MJ7P#](#) [B41041A2687M8](#) [B41041A7226M8](#) [B41044A7157M6](#) [EPA-201ELL151MM25S](#)  
[NCD681K10KVY5PF](#) [KM4700/16](#) [KME50VB100M-8X11.5](#) [SG220M1CSA-0407](#) [ES5107M016AE1DA](#) [ESMG160ETD102MJ16S](#)  
[ESRL25V330](#) [ESX472M16B](#) [SZ010M1500A5S-1015](#) [227RZS050M](#) [476CKH100MSA](#) [477CKR100M](#) [KME25VB100M-6.3X11](#)  
[XRL50V22](#) [052687X](#) [107CKR010M](#) [EKMA500ELL4R7ME07D](#) [NRE-S560M16V6.3X7TBSTF](#) [RGA221M1CTA-0611G](#)  
[ERZA630VHN182UP54N](#) [UPL1A331MPH](#) [MAL214658821E3](#) [MAL214658122E3](#) [SK106M016AC3KAKPLP](#) [SK107M025AE3EAKPLP](#)  
[B43827A1106M8](#) [B41022A5686M6](#) [EKMA160EC3101MF07D](#) [ESMG160ETD221MF11D](#) [EKZH160ETD152MJ20S](#) [RBD-25V100KE3#N](#)  
[EKMA350ELL100ME07D](#) [ESMG160ETD101ME11D](#) [EGXF500ELL561ML15S](#) [SK107M025AE3KAKPLP](#) [EKMG350ETD471MJ16S](#)  
[MEA562M2G--D130](#) [MEA562M2W--D130](#) [35YXA330MEFC10X12.5](#) [RGA221M2ABK-1320G](#) [ERR1HM1R0D11OT](#)  
[ERR1CM222W20OT](#) [TM1081EMF202RB](#) [RXQ271M2EBK-1836](#)