

Type MPF AC Motor Run Capacitors

Oval and Round, Oil Filled, 70 °C, Metallized Polypropylene Capacitors



Type MPF AC metallized polypropylene film dielectric capacitors offer a reliable option for alternating current applications. All devices are oil filled in metal cases with 4-prong quick disconnect terminals for easy assembly. These capacitors pack high capacitance and voltage capabilities into a small, light-weight package. The MPF is internally protected for fail-safe operation. These capacitors have extremely low DF that is ideal for AC motor-run applications.

Highlights

- Low DF
- Protected with a pressure sensitive interrupter
- Small size and light weight
- UL E71645
- CSA 219950
- Air conditioning and refrigeration applications
- Power factor correction
- Motors



Complies with the EU Directive 2002/95/EC requirement restricting the use of Lead (Pb), Mercury (Hg), Cadmium (Cd), Hexavalent chromium (Cr(VI)), PolyBrominated Biphenyls (PBB) and PolyBrominated Diphenyl Ethers (PBDE).


Specifications

Capacitance Range:	1 to 80 μ F
Voltage Ratings:	330 Vac, 370 Vac, 440 Vac
Capacitance Tolerance:	$\pm 10\%$
Operating Temperature Range:	-40 °C to +70 °C
Operating Frequency:	50 to 60 Hz
Dissipation Factor:	0.1% max @ 60 Hz

Outline Drawings


Oval				
Style	A	B	D	Industry Type
32	1 5/16"	2 5/32"	13/16"	1 1/4" Flat Oval
37	1 29/32"	2 29/32"	13/16"	1 3/4" Flat Oval
38	1 31/32"	3 21/32"	13/16"	2.0" Flat Oval

*See Ratings Table for "H" dimension

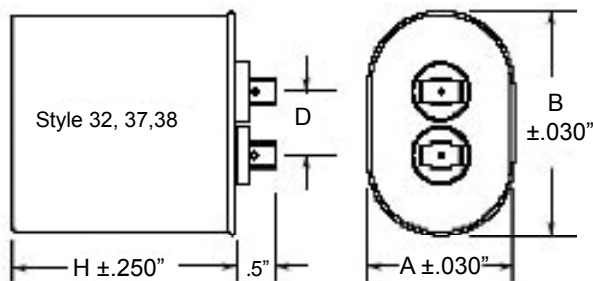

Round				
Style	A	B	D	Industry Type
21	1 3/4"	1 7/8"	13/16"	1 3/4" Round
23	2.0"	2 1/8"	13/16"	2.0" Round
24	2 1/2"	2 5/8"	13/16"	2 1/2" Round

*See Ratings Table for "H" dimension

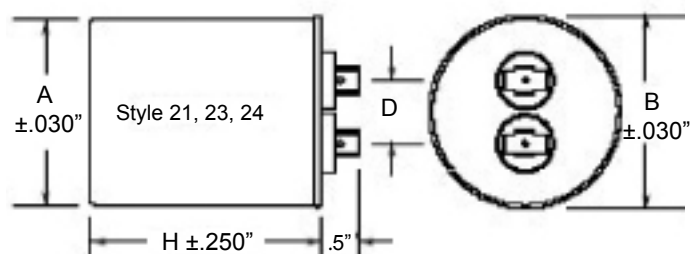

Type MPF AC Motor Run Capacitors

Ratings

Oval

Cap (μ F)	Volts (Vac)	Base Style	Height (In.)	Catalog Part Number
370 Vac				
1.0	370	32	2.13	32FD3701-F
2.0	370	32	2.13	32FD3702-F
3.0	370	32	2.13	32FD3703-F
4.0	370	32	2.13	32FD3704-F
5.0	370	32	2.38	32FD3705-F
6.0	370	32	2.38	32FD3706-F
7.5	370	32	2.38	32FD37075-F
10.0	370	32	2.63	32FD3710-F
12.5	370	32	3.00	32FD37125-F
12.5	370	37	2.63	37FD37125-F
15.0	370	37	2.63	37FD3715-F
17.5	370	37	2.63	37FD37175-F
20.0	370	37	2.63	37FD3720-F
22.5	370	37	2.63	37FD37225-F
25.0	370	37	2.63	37FD3725-F
27.5	370	38	3.00	38FD37275-F
30.0	370	37	3.00	37FD3730-F
30.0	370	38	3.00	38FD3730-F
35.0	370	37	3.75	37FD3735-F
35.0	370	38	3.00	38FD3735-F
40.0	370	37	3.75	37FD3740-F
40.0	370	38	3.00	38FD3740-F
45.0	370	37	3.75	37FD3745-F
45.0	370	38	3.00	38FD3745-F
50.0	370	38	3.00	38FD3750-F
70.0	370	38	3.75	38FD3770-F
440 Vac				
1.0	440	32	2.13	32FB4401-F
2.0	440	32	2.13	32FB4402-F
3.0	440	32	2.38	32FB4403-F
4.0	440	32	2.38	32FB4404-F
5.0	440	32	2.63	32FB4405-F
6.0	440	32	2.63	32FB4406-F
7.5	440	32	2.63	32FB44075-F
7.5	440	37	2.63	37FB44075-F
10.0	440	32	3.75	32FB4410-F
10.0	440	37	2.63	37FB4410-F
12.5	440	37	2.63	37FB44125-F
15.0	440	37	2.63	37FB4415-F
17.5	440	37	2.63	37FB44175-F
20.0	440	37	3.00	37FB4420-F
20.0	440	38	3.00	38FB4420-F
25.0	440	37	3.75	37FB4425-F
25.0	440	38	3.75	38FB4425-F
30.0	440	38	3.75	38FB4430-F
35.0	440	37	4.75	37FB4435-F
35.0	440	38	3.75	38FB4435-F
40.0	440	37	4.75	37FB4440-F
40.0	440	38	3.75	38FB4440-F
45.0	440	38	3.75	38FB4445-F
50.0	440	38	3.75	38FB4450-F
55.0	440	38	4.75	38FB4455-F
60.0	440	38	4.75	38FB4460-F

Round

Cap (μ F)	Volts (Vac)	Base Style	Height (In.)	Catalog Part Number
330 Vac				
3.0	330	23	2.63	23FD3303-F
4.0	330	23	2.63	23FD3304-F
5.0	330	23	2.63	23FD3305-F
6.0	330	23	2.63	23FD3306-F
7.0	330	23	2.63	23FD3307-F
8.0	330	23	2.63	23FD3308-F
10.0	330	23	2.63	23FD3310-F
370 Vac				
3.0	370	21	2.63	21FD3703-F
4.0	370	21	2.63	21FD3704-F
5.0	370	21	2.63	21FD3705-F
6.0	370	21	2.63	21FD3706-F
7.0	370	21	2.63	21FD3707-F
8.0	370	21	2.63	21FD3708-F
10.0	370	21	2.63	21FD3710-F
12.5	370	21	2.63	21FD37125-F
15.0	370	21	2.63	21FD3715-F
17.5	370	21	2.63	21FD37175-F
20	370	21	2.63	21FD3720-F
25	370	21	3.00	21FD3725-F
25	370	23	3.00	23FD3725-F
30	370	21	3.00	21FD3730-F
30	370	23	3.00	23FD3730-F
35	370	21	3.75	21FD3735-F
35	370	23	3.00	23FD3735-F
40	370	21	3.75	21FD3740-F
40	370	23	3.00	23FD3740-F
45	370	23	3.75	23FD3745-F
45	370	24	3.00	24FD3745-F
50	370	23	3.75	23FD3750-F
50	370	24	3.00	24FD3750-F
55	370	23	3.75	23FD3755-F
55	370	24	3.00	24FD3755-F
60	370	23	3.75	23FD3760-F
60	370	24	3.00	24FD3760-F
65	370	24	3.75	24FD3765-F
70	370	24	3.75	24FD3770-F
80	370	24	4.75	24FD3780-F
440 Vac				
15	440	21	2.63	21FB4415-F
20	440	21	3.00	21FB4420-F
20	440	23	3.00	23FB4420-F
22.5	440	21	3.00	21FB44225-F
22.5	440	23	3.00	23FB44225-F
25	440	21	3.75	21FB4425-F
25	440	23	3.00	23FB4425-F
30	440	23	3.75	23FB4430-F
30	440	24	3.00	24FB4430-F
35	440	23	3.75	23FB4435-F
35	440	24	3.00	24FB4435-F
40	440	23	3.75	23FB4440-F
40	440	24	3.75	24FB4440-F
45	440	24	3.75	24FB4445-F
50	440	24	3.75	24FB4450-F
55	440	24	3.75	24FB4455-F
60	440	24	4.75	24FB4460-F
70	440	24	4.75	24FB4470-F


Type MPF AC Motor Run Capacitors

Hardware for Round and Oval Metals Cans


Oval Capacitor Hardware

Mounting Brackets #32107


Case Code	Bracket
A	32107-1
C	32107-2
D	32107-3

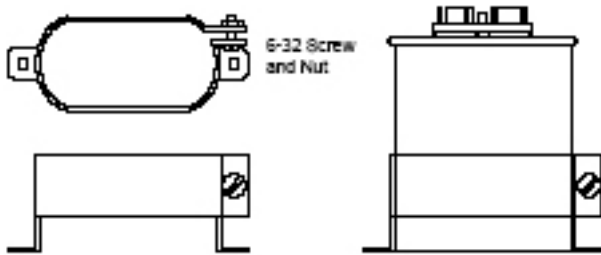

End Mount Footed Bracket (2 required) #30434




Side Mount Footed Bracket (2 required) #31762





H (Inches)	End Mount	Side Mount
2.13	30434-33	31762-45
2.38	30434-37	31762-46
2.63	30434-41	31762-47
2.88	30434-45	31762-48
3.13	30434-49	31762-49
3.50	30434-55	31762-50
3.75	30434-59	31762-83
3.88	30434-61	31762-51
4.25	30434-67	31762-52
4.75	30434-75	31762-54
5.13	30434-81	31762-132
5.25	30434-83	31762-55
5.75	30434-91	31762-56
6.25	30434-99	31762-59
6.75	30434-107	31762-60
7.25	30434-115	31762-62
8.00	30434-127	31762-63
9.00	30434-143	31762-78

Insulating Terminal Boots UL Approved Material

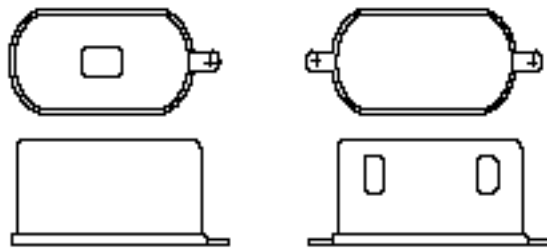

Wrap Around Bracket


Case Code	Bracket
A	30393-5
C	30393-9
D	OB3



Round Capacitor Hardware


3 Footed Round Mounting Bracket

Case Code	Bracket
P	VR6B
S	VR8B
T	VR10B

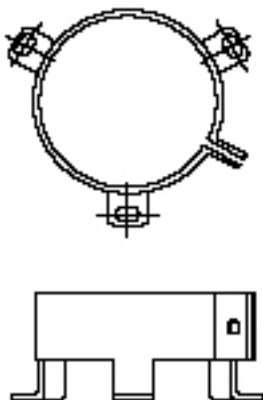


2 Footed Round Mounting Bracket

Case Code	Bracket
P	32107-6
S	32107-7
T	32107-8

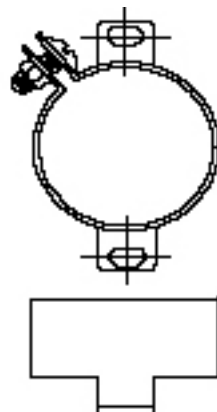

Wrap Around Bracket



Case Code	Bracket
P	RB175
S	RB200
T	RB250

Type MPF AC Motor Run Capacitors

Notice and Disclaimer: All product drawings, descriptions, specifications, statements, information and data (collectively, the "Information") in this datasheet or other publication are subject to change. The customer is responsible for checking, confirming and verifying the extent to which the Information contained in this datasheet or other publication is applicable to an order at the time the order is placed. All Information given herein is believed to be accurate and reliable, but it is presented without any guarantee, warranty, representation or responsibility of any kind, expressed or implied. Statements of suitability for certain applications are based on the knowledge that the Cornell Dubilier company providing such statements ("Cornell Dubilier") has of operating conditions that such Cornell Dubilier company regards as typical for such applications, but are not intended to constitute any guarantee, warranty or representation regarding any such matter – and Cornell Dubilier specifically and expressly disclaims any guarantee, warranty or representation concerning the suitability for a specific customer application, use, storage, transportation, or operating environment. The Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by Cornell Dubilier with reference to the use of any Cornell Dubilier products is given gratis (unless otherwise specified by Cornell Dubilier), and Cornell Dubilier assumes no obligation or liability for the advice given or results obtained. Although Cornell Dubilier strives to apply the most stringent quality and safety standards regarding the design and manufacturing of its products, in light of the current state of the art, isolated component failures may still occur. Accordingly, customer applications which require a high degree of reliability or safety should employ suitable designs or other safeguards (such as installation of protective circuitry or redundancies or other appropriate protective measures) in order to ensure that the failure of an electrical component does not result in a risk of personal injury or property damage. Although all product-related warnings, cautions and notes must be observed, the customer should not assume that all safety measures are indicated in such warnings, cautions and notes, or that other safety measures may not be required.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Cornell Dubilier](#) manufacturer:

Other Similar products are found below :

[474K400CS6](#) [107RZS016M](#) [CK06BX563K](#) [TDC226K035WSG-F](#) [CK05BX151K](#) [CK05BX472K](#) [TDC106K010NSF-F](#) [CK06BX223K](#)
[CK06BX332K](#) [106MABA02KJS](#) [CK05BX182K](#) [CK05BX181K](#) [CK05BX101K](#) [205QPC250KA3A1LL](#) [255QPC250KA3A1L](#) [CK05BX560K](#)
[CK05BX222K](#) [CK05BX270K](#) [CK05BX271K](#) [RJD2450ST1](#) [RJD3032](#) [RJD2430C1](#) [C0805C102K5RAC](#) [CK05BX822K](#) [ESRD100M06R](#)
[CK05BX104K](#) [EDLSG105V5R5C](#) [5AE-2000](#) [M39018/04-2181M](#) [M39018/06-0158M](#) [715P15456MA3](#) [EWF05047](#) [EWF1A147](#)
[MLP562M063EB0C](#) [MLS221M250EK0C](#) [MMW05W5-5.0MFD](#) [GM303M](#) [PSU4330](#) [PSU46030](#) [PVC16268](#) [PVC1628](#) [PVC2168](#) [124-](#)
[138MFD](#) [DCMX262T400BF2B](#) [AFK686M63G24T-F](#) [MR10KT](#) [150472K630AA](#) [155PHC600K](#) [160104J160C](#) [MTC52L4](#)