



## Aluminum Electrolytic Capacitors

+85°C Low Profile, Radial Lead




### FEATURES

Small Size - Low Profile - Lead Free Leads

### APPLICATIONS

Coupling - Blocking - Bypass - Filtering

| Operating Temperature Range                              |                | -40°C to +85°C                                      |     |     |                  |      |      |     |     |     |     |     |
|--|----------------|---|-----|-----|------------------|------|------|-----|-----|-----|-----|-----|
| Capacitance Tolerance                                    |                | +20% at 120 Hz, 20°C                                |     |     |                  |      |      |     |     |     |     |     |
| Surge voltage  | WVDC           | 6.3   | 10  | 16  | 25               | 35   | 50   |     |     |     |     |     |
|  | SVDC           | 7.9   | 13  | 20  | 32               | 44   | 63   |     |     |     |     |     |
| Dissipation Factor                                       | WVDC           | 6.3   | 10  | 16  | 25               | 35   | 50   |     |     |     |     |     |
|  | $\tan \delta$  | .25   | .2  | .17 | .15              | .12  | .1   |     |     |     |     |     |
| Leakage current  |                | 2 Minutes   |     |     |                  |      |      |     |     |     |     |     |
|  |                | .01CV or 3uA, Whichever is greater                  |     |     |                  |      |      |     |     |     |     |     |
| Low temperature stability<br>Impedance ratio<br>(120 Hz) | Rated WVDC     | 6.3   | 10  | 16  | 25               | 35   | 50   |     |     |     |     |     |
|  | -25°C to +20°C | 5   | 4   | 3   | 2                | 2    | 2    |     |     |     |     |     |
|  | -40°C to +20°C | 10  | 8   | 6   | 4                | 4    | 4    |     |     |     |     |     |
| Load Life  |                | 1000 hours at 85°C with rated WVDC applied          |     |     |                  |      |      |     |     |     |     |     |
|  |                | Capacitance change <20% of initial measured value   |     |     |                  |      |      |     |     |     |     |     |
|  |                | Dissipation factor <200% of maximum specified value |     |     |                  |      |      |     |     |     |     |     |
| Shelf Life   |                | Leakage current ≥100% of maximum specified value    |     |     |                  |      |      |     |     |     |     |     |
|  |                | 1000 hours at 85°C with no voltage applied          |     |     |                  |      |      |     |     |     |     |     |
|  |                | Capacitance change <20% of initial measured value   |     |     |                  |      |      |     |     |     |     |     |
| Ripple Current Multipliers                               |                | Dissipation factor <200% of maximum specified value |     |     |                  |      |      |     |     |     |     |     |
|  |                | Leakage current ≥100% of maximum specified value    |     |     |                  |      |      |     |     |     |     |     |
|  |                | Frequency (Hz)                                      |     |     | Temperature (°C) |      |      |     |     |     |     |     |
|  |                | 50  | 120 | 400 | 1k               | 10k  | 100k | 85  | 70  | 65  | 60  | 45  |
|  |                | 0.85  | 1.0 | 1.1 | 1.13             | 1.15 | 1.4  | 1.0 | 1.4 | 1.6 | 1.7 | 1.8 |

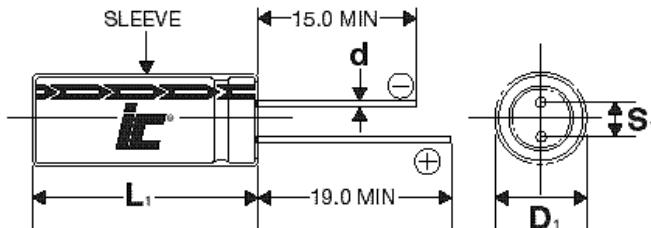

|      |     |     |     |     |     |      |     |
|------|-----|-----|-----|-----|-----|------|-----|
| D+.5 | 4   | 5   | 6.3 | 8   | 10  | 12.5 | 16  |
| S    | 1.5 | 2   | 2.5 | 3.5 | 5   | 5    | 7.5 |
| d    | .45 | .45 | .45 | .6  | .6  | .6   | .8  |
| B    | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.8  | 0.5 |

L<sub>1</sub>=L+1mm  
S<sub>1</sub>=S±0.5mm

# RSS

+85°C, 7 to 15mm Height,  
1000 hours

| WVDC | Capacitance<br>( $\mu$ F) | IC PART NUMBER    | Maximum<br>ESR ( $\Omega$ )<br>120 Hz,<br>+20°C | Maximum<br>RMS Ripple<br>Current<br>(mA)<br>120 Hz,<br>+85°C | Dims DxL<br>(mm) |
|------|---------------------------|-------------------|---|--|------------------|
| 6.3  | 47                        | <b>476RSS6R3M</b> | 8.818   | 80   | 5x7              |
| 6.3  | 100                       | <b>107RSS6R3M</b> | 4.145   | 90   | 6.3x7            |
| 6.3  | 470                       | <b>477RSS6R3M</b> | 0.882   | 238  | 10x9             |
| 10   | 33                        | <b>336RSS010M</b> | 10.0477   | 50   | 5x7              |
| 10   | 220                       | <b>227RSS010M</b> | 1.507   | 165  | 8x9              |
| 16   | 10                        | <b>106RSS016M</b> | 28.184  | 40   | 4x7              |
| 16   | 22                        | <b>226RSS016M</b> | 12.811  | 45   | 5x7              |
| 16   | 47                        | <b>476RSS016M</b> | 5.997   | 80   | 6.3x7            |
| 16   | 220                       | <b>227RSS016M</b> | 1.281   | 202  | 10x9             |
| 16   | 1000                      | <b>108RSS016M</b> | 0.282   | 655  | 12.5x15          |
| 16   | 2200                      | <b>228RSS016M</b> | 0.1583  | 940  | 16x15            |
| 25   | 33                        | <b>336RSS025M</b> | 7.536   | 70   | 6.3x7            |

| WVDC | Capacitance<br>( $\mu$ F) | IC PART NUMBER    | Maximum<br>ESR ( $\Omega$ )<br>120 Hz,<br>+20°C | Maximum<br>RMS Ripple<br>Current<br>(mA)<br>120 Hz,<br>+85°C | Dims DxL<br>(mm) |
|------|---------------------------|-------------------|---|--|------------------|
| 25   | 100                       | <b>107RSS025M</b> | 2.487   | 135  | 8x9              |
| 35   | 4.7                       | <b>475RSS035M</b> | 42.328  | 25   | 4x7              |
| 35   | 10                        | <b>106RSS035M</b> | 19.894  | 45   | 5x7              |
| 35   | 22                        | <b>226RSS035M</b> | 9.043   | 70   | 6.3x7            |
| 35   | 100                       | <b>107RSS035M</b> | 1.989   | 160  | 10x9             |
| 35   | 470                       | <b>477RSS035M</b> | 0.423   | 524  | 10x12.5          |
| 35   | 1000                      | <b>108RSS035M</b> | 0.199   | 1000   | 16x15            |
| 50   | 1                         | <b>105RSS050M</b> | 165.786   | 10   | 4x7              |
| 50   | 2.2                       | <b>225RSS050M</b> | 75.358  | 20   | 4x7              |
| 50   | 3.3                       | <b>335RSS050M</b> | 50.238  | 25   | 4x7              |
| 50   | 4.7                       | <b>475RSS050M</b> | 35.274  | 30   | 5x7              |
| 50   | 10                        | <b>106RSS050M</b> | 16.579  | 50   | 6.3x7            |

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for Aluminum Electrolytic Capacitors - Leaded category:***

***Click to view products by Cornell Dubilier manufacturer:***

Other Similar products are found below :

[LXY50VB4.7M-5X11](#) [MAL203125221E3](#) [MAL204216159E3](#) [ESMG101ETD100MF11S](#) [RBC-25V-10UF-4X7](#) [RE3-35V222MJ6#](#) [RFO-100V471MJ7P#](#) [B41041A2687M8](#) [B41041A7226M8](#) [B41044A7157M6](#) [EKRG250ELL100MD07D](#) [EKXG201EC3101ML20S](#) [EKXG351ETD6R8MJ16S](#) [EKZM160ETD471MHB5D](#) [EPA-201ELL151MM25S](#) [NCD681K10KVY5PF](#) [NRLF103M25V35X20F](#) [KM4700/16](#) [KME50VB100M-8X11.5](#) [RXJ222M1EBK-1625](#) [SG220M1CSA-0407](#) [ES5107M016AE1DA](#) [ESX472M16B](#) [MAL211929479E3](#) [40D506F050DF5A](#) [TE1202E](#) [36DA273F050BB2A](#) [KME25VB100M-6.3X11](#) [511D336M250EK5D](#) [511D337M035CG4D](#) [515D477M035CG8PE3](#) [052687X](#) [EKMA500ELL4R7ME07D](#) [EKRG100ETC221MF09D](#) [NRE-S560M16V6.3X7TBSTF](#) [ERZA630VHN182UP54N](#) [MAL214099813E3](#) [MAL211990518E3](#) [MAL204281229E3](#) [NEV680M35EF](#) [686KXM050M](#) [ERS1VM222L30OT](#) [EGW2GM150W16OT](#) [EGS2GM6R8G12OC](#) [EHS2GM220W20OT](#) [ERF1VM222L30OT](#) [ERF1KM151G20OT](#) [EKZE500ELL101MHB5D](#) [EKMM251VSN221MP25S](#) [RGA221M1HBK-1016G](#)