

ILLINOIS CAPACITOR INC.

8/7/2015W

3757 W. Touhy Ave. Lincolnwood, IL 60712 (847)-675-1760 FAX (847)-673-2850 www.illcap.com
Illinois Capacitor (HK) Ltd., Tel: 85227930931, Fax: 85227930731, www.illcap.com.hk

I.C. PART NUMBER: 337KCZ035MGBW

High Frequency Low Impedance/ESR Radial Lead Aluminum Electrolytic Capacitor
Parts are RoHS compliant

ELECTRICAL SPECIFICATIONS

CAPACITANCE:

330 μ F

TOLERANCE:

-20 %, +20 %

DISSIPATION FACTOR:

0.12 Max at 120 Hz and 20°C

ESR

0.603 Ohms Max at 20°C and 120 Hz

0.04 Ohms Max at 20°C and 100kHz

TEMPERATURE RANGE:

-40°C to +105°C

WVDC:

35 Volts DC

SVDC:

44 Volts DC

RIPPLE CURRENT:

1980 mA at 100 kHz and +105°C

IMPEDANCE RATIOS

-40°C/20°C - 6

LEAKAGE CURRENT

.01CV or 3uA, whichever is greater

115.5 uA after 2 Minutes

RIPPLE CURRENT FREQUENCY MULTIPLIERS

50 Hz:	120 Hz:	400 Hz:	1 kHz:	10 kHz:	100 kHz:
0.4	0.5	0.5	0.8	0.9	1

LOAD LIFE

10000 hours at 105°C with 100 % of rated voltage
and with 100 % of rated ripple current

SHELF LIFE:


1000 hours at rated temperature

Max Cap Change: $\leq 20\%$ of initially measured values
DF Change: $\leq 200\%$ of maximum specified value
LC change: $\leq 100\%$ of maximum specified value

Capacitance Change: $< 20\%$ of initially measured value
D.F. Change: $< 200\%$ of maximum specified value
L.C. Change: $< 200\%$ of maximum specified value

PHYSICAL SPECIFICATIONS

DIAMETER (D): 10 mm + 0.5 mm
LENGTH (L): 16 mm + 1.5 mm
LEAD SPACING (S): 5 mm, +/- 0.5 mm
LEAD WIRE DIAMETER (d): 0.6 mm +/- 0.05 mm
LEAD LENGTH (LL): 15 mm Min
Sleeving: BROWN PET
Lead Finish: sleeving Matte Tin

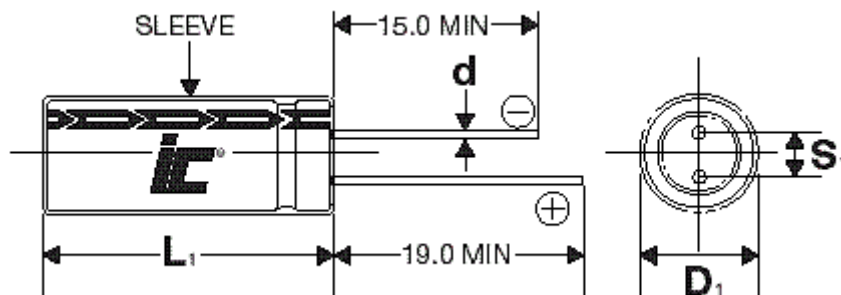

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Aluminium Electrolytic Capacitors - Radial Leaded](#) category:

Click to view products by [Cornell Dubilier](#) manufacturer:

Other Similar products are found below :

[LXY50VB4.7M-5X11](#) [RFO-100V471MJ7P#](#) [B41041A2687M8](#) [B41041A7226M8](#) [B41044A7157M6](#) [EPA-201ELL151MM25S](#)

[NCD681K10KVY5PF](#) [KM4700/16](#) [KME50VB100M-8X11.5](#) [SG220M1CSA-0407](#) [ES5107M016AE1DA](#) [ESMG160ETD102MJ16S](#)

[ESRL25V330](#) [ESX472M16B](#) [SZ010M1500A5S-1015](#) [227RZS050M](#) [476CKH100MSA](#) [477CKR100M](#) [KME25VB100M-6.3X11](#)

[XRL50V22](#) [052687X](#) [107CKR010M](#) [EKMA500ELL4R7ME07D](#) [NRE-S560M16V6.3X7TBSTF](#) [RGA221M1CTA-0611G](#)

[ERZA630VHN182UP54N](#) [UPL1A331MPH](#) [MAL214658821E3](#) [MAL214658122E3](#) [SK106M016AC3KAKPLP](#) [SK107M025AE3EAKPLP](#)

[B43827A1106M8](#) [B41022A5686M6](#) [EKMA160EC3101MF07D](#) [ESMG160ETD221MF11D](#) [EKZH160ETD152MJ20S](#) [RBD-25V100KE3#N](#)

[EKMA350ELL100ME07D](#) [ESMG160ETD101ME11D](#) [EGXF500ELL561ML15S](#) [SK107M025AE3KAKPLP](#) [EKMG350ETD471MJ16S](#)

[MEA562M2G--D130](#) [MEA562M2W--D130](#) [35YXA330MEFC10X12.5](#) [RGA221M2ABK-1320G](#) [ERR1HM1R0D11OT](#)

[ERR1CM222W20OT](#) [TM1081EMF202RB](#) [RXQ271M2EBK-1836](#)