

Type 932 Polypropylene Film Capacitors

**Metallized
Axial Leads**




**High Voltage/High Frequency
Switching Power Supplies**

Type 932 axial-leaded, metallized polypropylene capacitors are available in a wide range of capacitance values in reduced sizes. Flame-retardant tape wrap and epoxy end seals provide moisture resistance. Used most frequently in high-voltage/high-frequency switching power supplies where superior stability and AC performance characteristics are important.

Specifications

Capacitance Range	1.0 to 30.0 μ F
Capacitance Tolerance	\pm 5% (J) standard, \pm 10% (K) optional
Rated Voltage	250—700 Vdc (160-400 Vac, 60 Hz)
Operating Temperature Range	-55 °C to 105 °C* *Full-rated voltage at 85 °C—Derate linearly to 50%-rated voltage at 105 °C
Dielectric Strength	200% (1 minute)
Dissipation Factor @ 120 Hz, +25 °C	..10% Max. (25 °C, 1kHz)
Insulation Resistance	200,000 M. x μ F 400,000 M. Min.
Life Test	2,000 Hours at 85 °C at 125% Rated Voltage
RoHS Compliant	

Outline Drawing

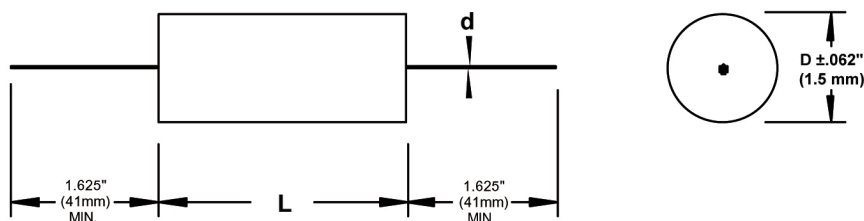


Ratings

Cap. (μ F)	Catalog Part Number	D \pm .062(1.5) Inches(mm)		L \pm .062(1.5) Inches(mm)		d Inches(mm)	Typical ESR @ 100 KHz milliohms	dV/dt V/ μ s	I peak A	I _{RMS} 70 °C 100 kHz (A)	
250 Vdc(160 Vac)											
1	932C2W1J-F	0.433	11.0	0.748	19.0	0.040	1.0	2.7	90	90	5
1.5	932C2W1P5J-F	0.394	10.0	1.220	31.0	0.040	1.0	5.4	50	75	7
2.2	932C2W2P2J-F	0.453	11.5	1.220	31.0	0.040	1.0	3.7	50	110	9
2.5	932C2W2P5J-F	0.472	12.0	1.220	31.0	0.040	1.0	3.3	50	125	9
3	932C2W3J-F	0.531	13.5	1.220	31.0	0.040	1.0	2.9	50	150	9
5	932C2W5J-F	0.669	17.0	1.220	31.0	0.040	1.0	2.1	50	250	9
6.8	932C2W6P8J-F	0.787	20.0	1.220	31.0	0.040	1.0	1.8	50	340	9
10	932C2W10J-F	0.787	20.0	1.654	42.0	0.040	1.0	2.1	30	300	9
15	932C2W15J-F	0.965	24.5	1.654	42.0	0.047	1.2	1.6	30	450	11
20	932C2W20J-F	1.102	28.0	1.654	42.0	0.047	1.2	1.5	30	600	11
25	932C2W25J-F	1.240	31.5	1.654	42.0	0.047	1.2	1.5	30	750	11
30	932C2W30J-F	1.161	29.5	2.165	55.0	0.047	1.2	2.6	20	600	11
400 Vdc (250 Vac)											
0.68	932C4P68J-F	0.394	10.0	1.220	31.0	0.040	1.0	7.4	70	48	6
1.00	932C4W1J-F	0.472	12.0	1.220	31.0	0.040	1.0	5.1	70	70	8

Type 932 Polypropylene Film Capacitors

Cap. (μ F)	Catalog Part Number	D $\pm 0.062(1.5)$ Inches(mm)		L $+0.062(1.5)$ Inches(mm)		d Inches(mm)		Typical ESR @100 KHz milliohms	dV/dt V/ μ s	I peak A	I _{RMS} 70 °C 100 kHz (A)
400 Vdc (250)											
1.50	932C4W1P5J-F	0.571	14.5	1.220	31	0.040	1.0	3.6	70	105	9
2.00	932C4W2J-F	0.650	16.5	1.220	31	0.040	1.0	2.9	70	140	9
2.20	932C4W2P2J-F	0.689	17.5	1.220	31	0.040	1.0	2.8	70	155	9
2.50	932C4W2P5J-F	0.728	18.5	1.220	31	0.040	1.0	2.5	70	175	9
3.00	932C4W3J-F	0.787	20.0	1.220	31	0.040	1.0	2.3	70	210	9
4.00	932C4W4J-F	0.768	19.5	1.654	42	0.040	1.0	3	50	200	9
4.70	932C4W4P7J-F	0.827	21.0	1.654	42	0.040	1.0	2.7	50	235	9
5.00	932C4W5J-F	0.846	21.5	1.654	42	0.040	1.0	2.6	50	250	9
6.80	932C4W6P8J-F	0.984	25.0	1.654	42	0.047	1.0	2.1	50	340	11
10.00	932C4W10J-F	1.181	30.0	1.654	42	0.047	1.2	1.8	50	500	11
15.00	932C4W15J-F	1.260	32.0	2.165	55	0.047	1.2	3.1	30	450	11
600 Vdc (330 Vac)											
1.00	932C6W1J-F	0.61	15.5	1.220	31	0.040	1.0	4.2	100	100	9
2.00	932C6W2J-F	0.728	18.5	1.654	42	0.040	1.0	4.1	75	150	9
2.20	932C6W2P2J-F	0.768	19.5	1.654	42	0.040	1.0	3.9	75	165	9
3.00	932C6W3J-F	0.886	22.5	1.654	42	0.047	1.2	3.1	75	225	9
4.70	932C6W4P7J-F	1.083	27.5	1.654	42	0.047	1.2	2.3	75	350	11
5.00	932C6W5J-F	1.122	28.5	1.654	42	0.047	1.2	2.2	75	375	11
6.80	932C6W6P8J-F	1.122	28.5	2.165	55	0.047	1.2	4.5	50	340	11
10.00	932C6W10J-F	1.258	34.5	2.165	55	0.047	1.2	3.5	50	500	11
700 Vdc (400Vac)											
0.68	932C7P68J-F	0.669	17.0	1.220	31	0.040	1.0	4.6	125	85	9
1.00	932C7W1J-F	0.807	20.5	1.220	31	0.040	1.0	3.4	125	125	9
1.50	932C7W1P5J-F	0.807	20.5	1.654	42	0.040	1.0	4.2	90	135	9
2.00	932C7W2J-F	0.925	23.5	1.654	42	0.047	1.2	3.3	90	180	11
2.20	932C7W2P2J-F	0.965	24.5	1.654	42	0.047	1.2	3.1	90	200	11
3.00	932C7W3J-F	1.122	28.5	1.654	42	0.047	1.2	2.6	90	270	11
4.00	932C7W4J-F	1.299	33.0	1.654	42	0.047	1.2	2.2	90	360	11
4.70	932C7W4P7J-F	1.181	30.0	2.165	55	0.047	1.2	5.2	60	280	11
5.00	932C7W5J-F	1.201	30.5	2.165	55	0.047	1.2	4.9	60	300	11

Part Numbering System

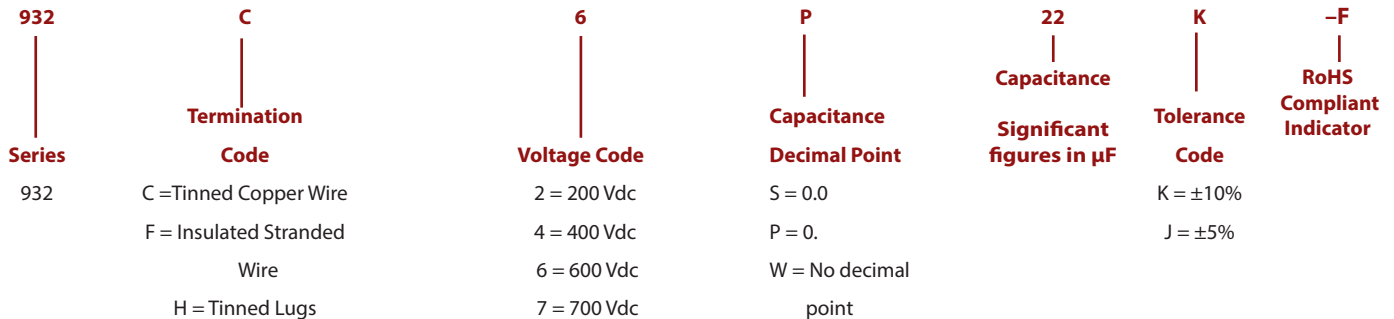

Notice and Disclaimer: All product drawings, descriptions, specifications, statements, information and data (collectively, the "Information") in this datasheet or other publication are subject to change. The customer is responsible for checking, confirming and verifying the extent to which the Information contained in this datasheet or other publication is applicable to an order at the time the order is placed. All Information given herein is believed to be accurate and reliable, but it is presented without any guarantee, warranty, representation or responsibility of any kind, expressed or implied. Statements of suitability for certain applications are based on the knowledge that the Cornell Dubilier company providing such statements ("Cornell Dubilier") has of operating conditions that such Cornell Dubilier company regards as typical for such applications, but are not intended to constitute any guarantee, warranty or representation regarding any such matter – and Cornell Dubilier specifically and expressly disclaims any guarantee, warranty or representation concerning the suitability for a specific customer application, use, storage, transportation, or operating environment. The Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by Cornell Dubilier with reference to the use of any Cornell Dubilier products is given gratis (unless otherwise specified by Cornell Dubilier), and Cornell Dubilier assumes no obligation or liability for the advice given or results obtained. Although Cornell Dubilier strives to apply the most stringent quality and safety standards regarding the design and manufacturing of its products, in light of the current state of the art, isolated component failures may still occur. Accordingly, customer applications which require a high degree of reliability or safety should employ suitable designs or other safeguards (such as installation of protective circuitry or redundancies or other appropriate protective measures) in order to ensure that the failure of an electrical component does not result in a risk of personal injury or property damage. Although all product-related warnings, cautions and notes must be observed, the customer should not assume that all safety measures are indicated in such warnings, cautions and notes, or that other safety measures may not be required.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Film Capacitors](#) category:

Click to view products by [Cornell Dubilier](#) manufacturer:

Other Similar products are found below :

[F450KG153J250ALH0J](#) [750-1018](#) [FKP1-1000160010P15](#) [FKP1-1500160010P15](#) [82EC1100DQ50K](#) [MMWAF150KME](#)
[PFR5101J100J11L16.5TA18](#) [PME261JB5220KR19T0](#) [A521HH333M035C](#) [QXJ2E474KTPT](#) [QXL2B333KTPT](#) [QXM2G104K](#) [DMT2P22](#)
[EEC2G505HQA406](#) [B32520C6332K000](#) [B32522C6104K000](#) [B32523Q3155J](#) [B32676E6755K](#) [C3B2AD44400B20K](#) [217-0716-001](#) [KP1830-](#)
[247/061-G](#) [SCD105K122A3-22](#) [2N3155](#) [F601BL225K063CL60A](#) [FKP1-2202KV5P15](#) [FKS3-680040010P10](#) [445450-1](#) [B32523Q0475K000](#)
[46KR415050M1K](#) [4BSNBX4100ZBFJ](#) [4DCNAQ4450ZA0J](#) [MKP383510063JKP2T0](#) [MKT 1813-368-015](#) [MKT182022263473](#) [4055292001](#)
[WMC08P22](#) [WMF1S15](#) [WMF4S68](#) [EEC2E106HQA405](#) [EEC2G805HQA415](#) [82DC3100DQ50J](#) [82DC4100AA60K](#) [82EC2150DQ50K](#)
[WMF4D68](#) [WMF1D68](#) [PHE841ED6150MR17T0](#) [B25620B118K883](#) [B25620B158K883](#) [66MD2100CK7AK](#) [97F8038](#)