

# P R B X

POWERBOX **Industrial Line**  
OFI700A Series  
700W Single Output  
AC/DC Baseplate Power Supply

OFI700A – a powerful a powerful baseplate cooling power supply for demanding applications. The design of transfer heat to the baseplate makes it suitable for none ventilated applications as in sealed enclosures. A product that is suitable for wide application areas in industrial and others. Ruggedized construction makes it ideal for harsh environmental applications.

## Features

Conductive cooling
Output active ORing (optional)
Redundancy operation
Vibration/shock according MIL-STD-810H
Cover (optional)
Low EMI
DC-OK
Remote sense
Remote On/Off
OCP, OVP, OTP, SCP
AUX voltage 12Vdc

## Input

Input voltage range	85-264VAC
Nominal input voltage	100-240VAC
Input voltage DC <sup>1)</sup>	120-350VDC
Input frequency	47-63Hz
Protection class	I (with ground)
Power factor	0.95/0.92 (110VAC/230VAC)
Inrush current	30A typ.
Input current	8.2A@110VAC, 3.9A@230VAC
Hold up time	20ms (230VAC, Full load)
Input fuse	Yes
Turn on time	600ms typ. (Remote on 500ms)
Leakage current	<0.75mA at 264VAC/60Hz

## Output

Output volt./Cur./Power	See table
Output peak power	See table
Minimum load	0A
Line regulation	0.5% mV max
Load regulation	0.5% mV max. 10-90% load change
Temp. coefficient	± 0.02%/°C
Ripple & noise (20MHz BW)	1% (2% below 0°C)
Output voltage adj.	potentiometer, see table



## Environmental

Operating temperature	-40°C to +95°C
Baseplate assembly	
Derating	See manual
Operating humidity	20-95%RH (Non condensing)
Altitude operation	max. 5000m
Storage temperature	-40°C to +85°C
Storage humidity	20-95%RH (Non condensing)
Vibration	MIL-STD-810H, Cat. 4 Fig. 514.8C-3
Shock	MIL-STD-810H, Procedure 1, 20G 11ms, Ground material

## Mechanical

Size WxHxD	With cover option: 126x40x250mm Without cover: 126x38x250mm
IP class	IPX0
Weight	0.95kg (1.1kg with cover)
Connectors	Input: Phoenix GMKDS 1,5/ 3-7,62 (1717732) Output: Studs/M6 Screw Signals: Molex 818311041
Connector placement	Input and Output on each side

## General

MTBF Telcordia	>789000h @ 25°C, full load
Life time expectations	See manual

Model Number	Output Voltage	Output Current	Output Voltage adj.	Efficiency 110VAC/230VAC
OFI700A12	12VDC	58.4A	9.6-14.4VDC	82% / 85.5%
OFI700A28	28VDC	25A	22.4-33.6VDC	85% / 88.5%
OFI700A48	48VDC	14.6A	38.4-57.6VDC	86% / 89.5%

### Note

1. DC input is not UL certified. For DC input external fuse shall be used, see manual.

### Protection Circuit and Others

Over current protection	Yes, works over 105% of rating auto recovery
Type of current limit	Hiccup
Over voltage protection	Yes
Over temp. protection	Yes
Remote sensing	Yes
Remote ON/OFF	Yes
Output LED	Yes, green
Active ORing	Yes (optional)
AUX Voltage	12Vdc/0.1A (regulation 10-14Vdc)

### Control and Communication

DC OK	Yes
IOG	Yes

### Isolation

Input -Output, RC, AUX	3000VAC
Input-FG	2000VAC
Output, RC, AUX-FG	500VAC
Output - RC, AUX	100VAC

### Safety Standards

UL certificate	UL 62368-1 2 <sup>nd</sup> ed. 2014 CSA/CSA-22.2 No. 62368-1
CB certificate evaluated to	IEC 62368-1:2014 EN 62368-1:2014 + A11:2017 BS EN 62368-1:2014 + A11:2017 AS/NZS 62368.1:2018 J62368-1 (2020)
Certification mark	CE, UKCA, cURus
RoHS	Yes, Directive 2011/65/EU (2015/863)


### EMC

Harmonic attenuator	EN61000-3-2 class A
Flicker	EN61000-3-3
Conducted noise	EN55032 class B
Radiated noise	EN55032 class A, models with cover: Class B
EMS immunity	Compliance to EN61000-4-2, 3, 4, 5, 6, 8, 11


### Part numbers and options

OFI700A	12	-	NO
	O/p Voltage		Option
	12: 12VDC		N: Cover
	28: 28VDC		O: ORing
	48: 48VDC		

**Block diagram**

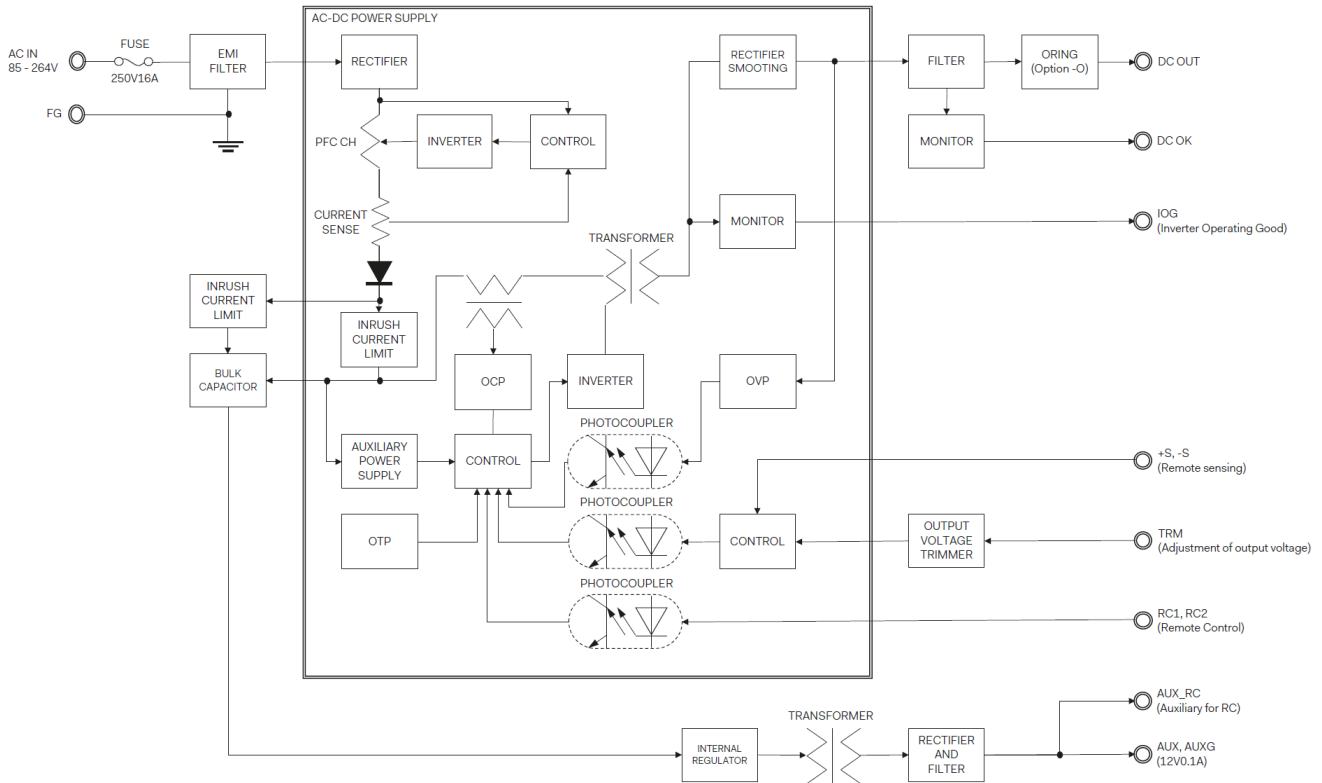

**Mechanical dimensions**

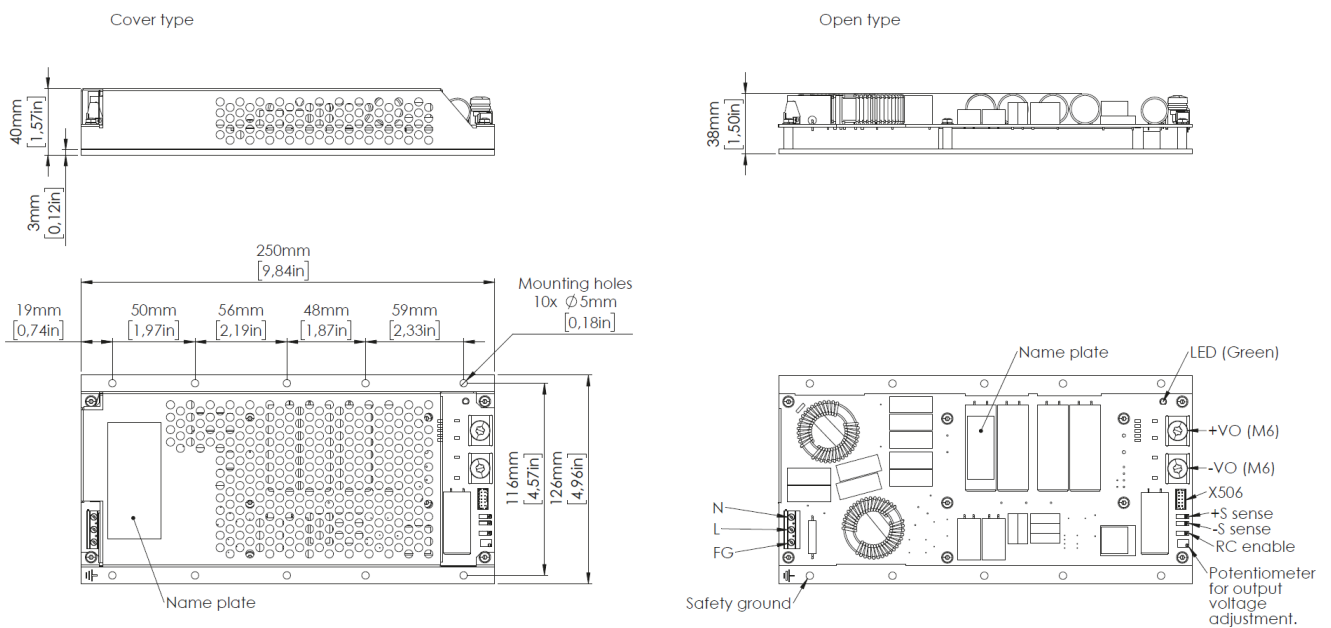

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Switching Power Supplies](#) category:*

*Click to view products by [Cosel](#) manufacturer:*

Other Similar products are found below :

[70841011](#) [73-551-0005](#) [73-551-0048](#) [EVS57-5R3/A](#) [AAD600S-4-OP](#) [MS924](#) [HWS50A-5/RA](#) [KD0204](#) [LDIN100150](#) [FP80](#) [FRV7000G](#)  
[22929](#) [PS3E-F12F](#) [CQM1IA121](#) [VI-PU22-EXX](#) [LDIN5075](#) [432703037161](#) [09-160CFG](#) [LPM000-BBAR-08](#) [LPM000-BBAR-07](#) [08-30466-](#)  
[1055G](#) [DMB-EWG](#) [CQM1IPS01](#) [SP-300-5](#) [CQM1-IPS02](#) [VI-MUL-ES](#) [22829](#) [08-30466-0028G](#) [09-250CFG](#) [CA400](#) [H47251](#) [96PSR-](#)  
[A460WOTH-2](#) [VP-E2935648E](#) [G08-L](#) [G06-Q01](#) [GHA300F-12-SNF](#) [MTA040009A](#) [FSA150024A](#) [VI-RUR22-EWXX](#) [VI-PU03-EYW](#)  
[PM1-03B-48-2](#) [VI-LUF-EW](#) [VI-QCWB3-CSV](#) [HLS30ZE-NT8](#) [UT1404-7](#) [ERP-350-12](#) [S8FSG01512C](#) [S8FSG03012C](#) [VI-PU22-EYY](#)  
[XPFM201A+](#) [S8FS-G15015C](#)