
-200 -223

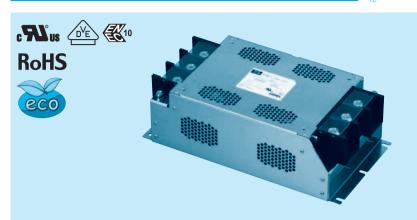

- ①Model Name ②Rated Current
- ③Line to ground capacitor code:See table 1.1.

table1.1 Line to ground capacitor code

Code	Leakage Current (Input 250/500V 60Hz)	Line to ground capacitor (nominal value)
103	1.0mA/2.0mA max	10,000pF
223	2.5mA/5.0mA max	22,000pF
333	3.5mA/7.0mA max	33,000pF

- \*When the line to ground capacitor code is different, the attenuation characteristic is
- 4 Option U:Improve differential mode attenuation (Rated voltage 250V)

#### **Features of TAC series**

# High-attenuation type of common mode noise from 150kHz to 1MHz (1-stage filter)


- · Three phase rated voltage 500 VAC (voltage range:528V max)
- · Selectable leakage current value


### **Specifications**

No.	Items	TAC-200-223	TAC-250-223	TAC-300-223
1	Rated Voltage[V]	AC Three Phase 500 (voltage range:528 max) 50/60Hz *1		
2	Rated Current[A]	200	250	300
3	Test Voltage (Terminal-Mounting Plate)	2,500 VAC (Cutoff Current = 100mA), 1 minute at room temperature and humidity		
4	Isolation Resistance (Terminal-Mounting Plate)	500 VDC 100M $\Omega$ min at room temperature and humidity		
5	Leakage current 250/500V 60Hz	2.5mA/5.0mA max		
6	DC resistance	2mΩ max	1.5mΩ max	1mΩ max
7	Safety agency approval temperatures	-25 to +85℃ (Refer to Derating Curve)		
8	Operating temperature	-40 to +85°C (Refer to Derating Curve)		
9	Operating humidity 20 to 95%RH (Non condensing)			
10	Storage temperature/humidity	-40 to +85°C/20 to 95%RH (Non condensing)		
11	Vibration	10 to 55Hz, 19.6m/s² (2G), 3min. Period, 1hour each X, Y and Z axis		
12	Impact	196.1m/s² (20G), 11ms Once each X, Y and Z axis		
13	Safety agency approvals	UL1283, CSA C22.2 No.8 (C-UL) , DIN EN60939 VDE0565 Teil3-1, ENEC		
14	Case size (without projection)	190×110×360 mm [7.48×4.33×14.17 inches] (W×H×D)		
15	Weight	8.0kg max		


<sup>\*1</sup> Only "TAC-\_\_\_-U", Three Phase 250 (275 max)

#### **Circuit Diagram**

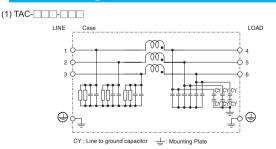

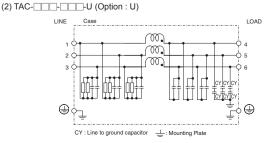


# **Derating Curve**

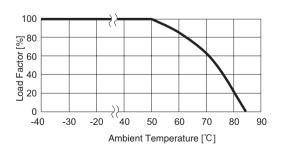

\*Keep free ventilation holes for cooling.

#### **External view**

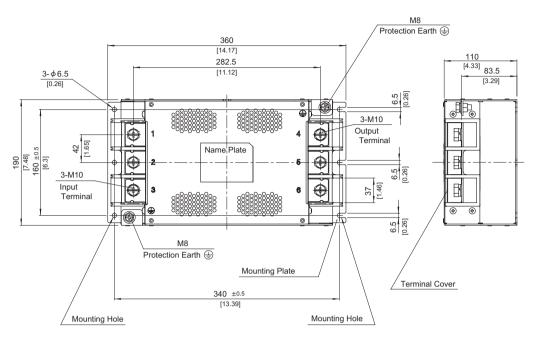

\* Can not be mounted upside-down. (mounted the top surface)

- % Tolerance : ±1 [±0.04]
- \* Weight: 8.0kg max
- Mounting Plate: Stainless steel t=2.0 [0.08]
- ※ Dimensions in mm, [ ]=inches
- \*\* Terminal block screw tightening torque M10 : 14.2N · m (144.9kgf · cm) max
- % Protection Earth screw tightening torque M8 : 9.2N  $\cdot$  m (93.9kgf  $\cdot$  cm) max

# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Power Line Filters category:

Click to view products by Cosel manufacturer:

Other Similar products are found below:

6609019-3 6609026-5 6609030-6 6609973-2 D30A 7-1609090-5 F2810 F4456A F7382Z F7863Z FAHAV3100ZC000 806276 FN2020B
1-06 FN2080B-10-06 FN2410H-32-33 FN2410H-80-34 FP144 FS4153-20-06 FS4353-500-99 12-MMB-030-11-D DB4-393 15811T200

20B1 LC630 2B1 1609080-2 1609993-8 1-6609070-1 F1100AA02 F1150CC10 F1500CA10 F1500CA15 F4041Z F7585E 1B1

FN2070A-16-06 FN2090A-20-06 FN2090B-12-06 FN2090Z-1-06 FN2410H-25-33 FN2410H-60-34 FN2410H-8-44 FN2412H-8-44

FN323B-6-01 FN3258H-130-35 FN610R-3-06 20EHQ7 20EHZ7 20K1 30B6