


# TEPS-series

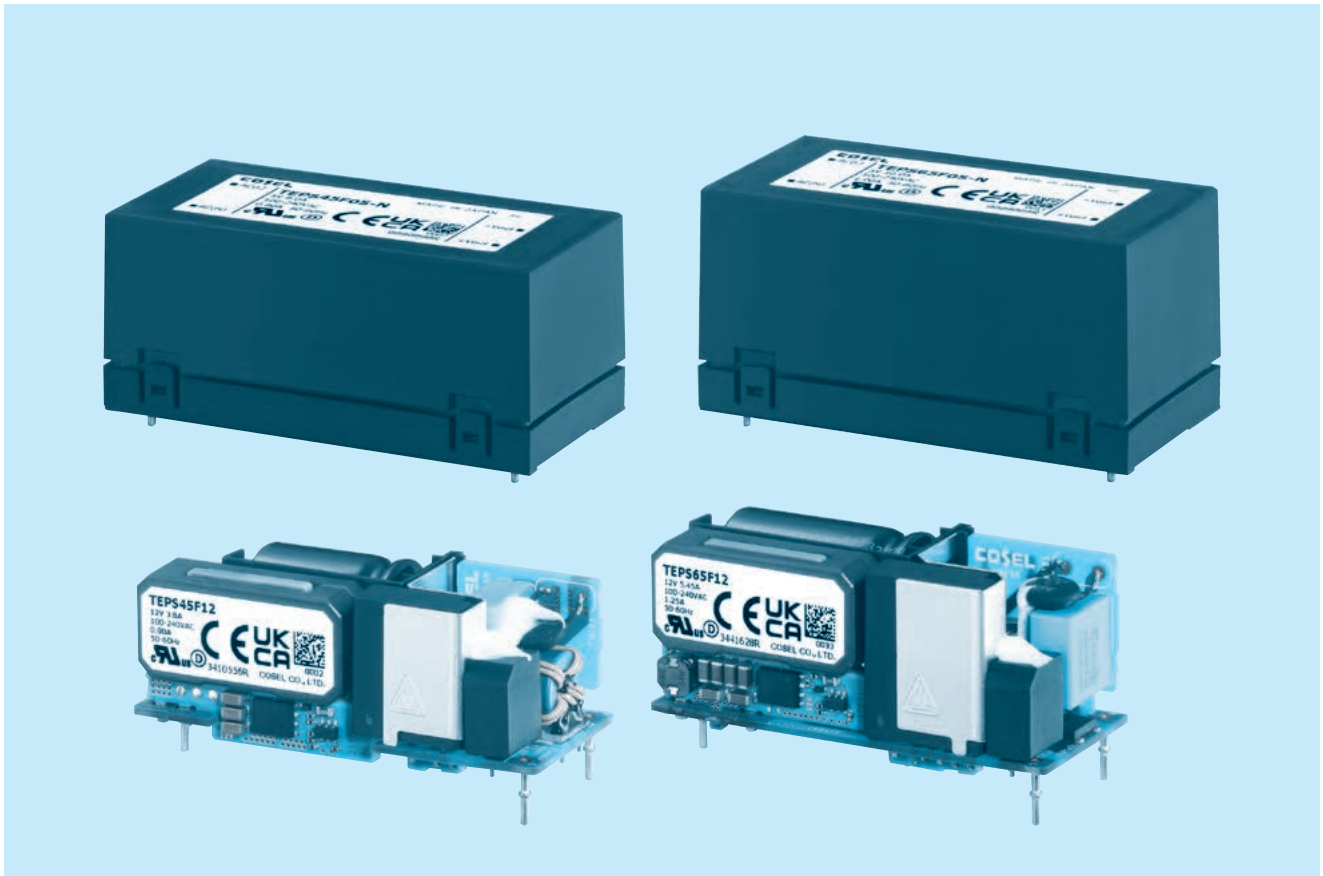

## Feature

- Small and Lightweight
- High efficiency
- Harmonic attenuator (Complies with IEC61000-3-2)
- Universal input (85-264VAC)
- Built-in inrush current, overcurrent and overvoltage protection circuits
- Class II

## Safety agency approvals

- UL62368-1, C-UL (equivalent to CAN/CSA-C22.2 No.62368-1), EN62368-1
- Complies with DEN-AN

## 5-year warranty (refer to Instruction Manual)

## CE marking

- Low Voltage Directive
- RoHS Directive

## UKCA marking

- Electrical Equipment Safety Regulations
- RoHS Regulations

## EMI

- Complies with CISPR11-B, CISPR32-B, EN55011-B, EN55032-B, FCC Part 15-B, FCC Part 18-B, VCCI-B


## EMS Compliance : EN61204-3, EN61000-6-2

- EN61000-4-2
- EN61000-4-3
- EN61000-4-4
- EN61000-4-5
- EN61000-4-6
- EN61000-4-8
- EN61000-4-11

# TEPS45F

TEP S 45 F   -

① ② ③ ④ ⑤ ⑥

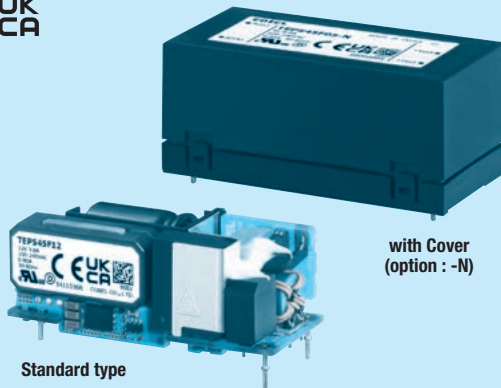

Example recommended EMI/EMC filter  
**EAM-03-000**

High voltage pulse noise type : EAP series 150KHz-1MHz (To safety ground the secondary side) : EAC serie

\*A higher current rating EMI/EMC filter may be recommended in view of the other devices that could be connected in parallel with the power supply.

- ① Series name
- ② Single output
- ③ Output wattage
- ④ Universal input
- ⑤ Output voltage
- ⑥ Optional \*1
- E2: Low leakage current
- H : with output peak current (12V,24V)
- N : with cover

ClassII

This power supply is manufactured by SMD technology. The stress to PCB like twisting or bending causes the defect of the unit, so handle the unit with care.  
\*Make sure necessary tests will be carried out on your end equipment with the power supply installed in accordance with any required EMC/EMI regulations.


| MODEL                 | TEPS45F05 | TEPS45F12 | TEPS45F12-H     | TEPS45F24 | TEPS45F24-H     |
|-----------------------|-----------|-----------|-----------------|-----------|-----------------|
| MAX OUTPUT WATTAGE[W] | 40.0      | 45.6      | 45.6 (65.4)     | 45.6      | 45.6 (66.0)     |
| DC OUTPUT             | 5V 8.0A   | 12V 3.8A  | 12V 3.8 (5.45)A | 24V 1.9A  | 24V 1.9 (2.75)A |

## SPECIFICATIONS

|                               | MODEL   | TEPS45F05   | TEPS45F12      | TEPS45F12-H    | TEPS45F24      | TEPS45F24-H     |         |
|-------------------------------|---|---|----------------|----------------|----------------|-----------------|---------|
| INPUT                         | VOLTAGE [VAC]   | *2 85 - 264 1 φ (Refer to "Derating" and Instruction Manual 3.1)                                    |                |                |                |                 |         |
|                               | CURRENT [A]   | ACIN 100V   | 0.80typ        | 0.90typ        |                |                 |         |
|                               |   | ACIN 230V   | 0.45typ        | 0.50typ        |                |                 |         |
|                               | FREQUENCY [Hz]  | 50 / 60 (45 - 66)   |                |                |                |                 |         |
|                               | EFFICIENCY [%]  | ACIN 100V   | 90.0typ        | 90.5typ        | 90.5typ        | 91.5typ         | 91.5typ |
|                               |   | ACIN 230V   | 90.5typ        | 91.5typ        | 91.5typ        | 92.5typ         | 92.5typ |
| INRUSH CURRENT [A]            | ACIN 100V   | 30typ (Io=100%) Ta=25°C at cold start   |                |                |                |                 |         |
|                               | ACIN 230V   | 65typ (Io=100%) Ta=25°C at cold start   |                |                |                |                 |         |
| LEAKAGE CURRENT[mA]           | 0.25max (ACIN 240V, 60Hz, Io=100%, According to IEC62368-1, and DEN-AN) |   |                |                |                |                 |         |
| OUTPUT                        | VOLTAGE [V]   | 5   | 12             | 12             | 24             | 24              |         |
|                               | CURRENT [A]   | *2 8.0  | 3.8            | 3.8 (Peak5.45) | 1.9            | 1.9 (Peak 2.75) |         |
|                               | LINE REGULATION [mV]  | *3 20max  | 48max          | 48max          | 96max          | 96max           |         |
|                               | LOAD REGULATION [mV]  | *3 40max  | 100max         | 100max         | 150max         | 150max          |         |
|                               | RIPPLE[mVp-p]   | *4 -10 to +50°C *5 240max   | 300max         | 300max         | 360max         | 360max          |         |
|                               | RIPPLE NOISE[mVp-p]   | *4 -10 to +50°C *5 300max   | 380max         | 380max         | 480max         | 480max          |         |
|                               | TEMPERATURE REGULATION [mV]   | 0 to +50°C *5 50max   | 120max         | 120max         | 240max         | 240max          |         |
|                               |   | -10 to +50°C *5 60max   | 150max         | 150max         | 290max         | 290max          |         |
|                               | DRIFT [mV]  | *6 20max  | 48max          | 48max          | 96max          | 96max           |         |
|                               | START-UP TIME [ms]  | 200typ (ACIN 100V, Io=100%)   |                |                |                |                 |         |
|                               | HOLD-UP TIME [ms]   | 10typ (ACIN 100V, Io=80%) / 60typ (ACIN 230V, Io=100%)  |                |                |                |                 |         |
| OUTPUT VOLTAGE SETTING [V]    | 4.90 to 5.30  | 11.50 to 12.50  | 11.50 to 12.50 | 23.00 to 25.00 | 23.00 to 25.00 |                 |         |
| PROTECTION CIRCUIT AND OTHERS | OVERCURRENT PROTECTION  | Works over 105% of rating (works over 101% of peak current at option -H) and recovers automatically |                |                |                |                 |         |
|                               | OVERVOLTAGE PROTECTION [V]  | 5.50 to 6.50  | 13.20 to 15.60 | 13.20 to 15.60 | 26.40 to 31.20 | 26.40 to 31.20  |         |
|                               | OPERATING INDICATION  | Not provided  |                |                |                |                 |         |
|                               | REMOTE SENSING  | Not provided  |                |                |                |                 |         |
| ISOLATION                     | INPUT-OUTPUT  | 3,000VAC 1minute, Cutoff current = 10mA, 500VDC 50MΩ min (At Room Temperature)                      |                |                |                |                 |         |
| ENVIRONMENT                   | OPERATING TEMP., HUMID. AND ALTITUDE                                    | *2 -10 to +70°C, 20 - 90%RH (Non condensing), (Refer to "Derating"), 5,000m (16,500feet) max        |                |                |                |                 |         |
|                               | STORAGE TEMP., HUMID. AND ALTITUDE                                      | -20 to +75°C, 20 - 90%RH (Non condensing), 9,000m (30,000feet) max                                  |                |                |                |                 |         |
|                               | VIBRATION   | 10 - 55Hz 19.6m/s <sup>2</sup> (2G), 3minutes period, 60minutes each along X, Y and Z axis          |                |                |                |                 |         |
|                               | IMPACT  | 196.1m/s <sup>2</sup> (20G), 11ms, once each X, Y and Z axis  |                |                |                |                 |         |
| SAFETY AND NOISE REGULATIONS  | AGENCY APPROVALS  | UL62368-1, C-UL(equivalent to CAN/CSA-C22.2 No.62368-1), EN62368-1, Complies with DEN-AN            |                |                |                |                 |         |
|                               | CONDUCTED NOISE   | *7 Complies with CISPR11-B, CISPR32-B, EN55011-B, EN55032-B, FCC Part 15-B, FCC Part 18-B, VCCI-B   |                |                |                |                 |         |
|                               | HARMONIC ATTENUATOR   | *8 Complies with IEC61000-3-2 (Class A) (No built-in power factor correction)                       |                |                |                |                 |         |
| OTHERS                        | CASE SIZE/WEIGHT  | 25.4 X 24.0 X 58.5mm [1.00 X 0.94 X 2.30 inches] (W X H X D) / 60g max (with cover : 80g max)       |                |                |                |                 |         |
|                               | COOLING METHOD  | *2 Convection/Forced air (Requires external fan)(Refer to "Derating")                               |                |                |                |                 |         |


- \*1 The listed options may affect the published standard specifications. Please contact us for detailed product specifications.
- \*2 Derating is required. ( ) means peak current. There is a possibility that an internal device is damaged when the specification is exceeded. Please contact us about the detail.
- \*3 At low load conditions, the burst mode operation will start. To check load regulation, you will need to measure the characteristics at average mode with instruments.
- \*4 This is the value that measured on measuring board with capacitor of 22μF and 0.1μF at 50mm from output terminal. (Refer to Instruction Manual)
- \*5 5V, 12V output product, the maximum temperature of 40°C.
- \*6 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C, with the input voltage held constant at the rated input/output.
- \*7 When secondary circuit will be connected to earth, the spec will be changed. (Refer to Instruction Manual 2)
- \*8 Please contact us about another class. When two or more units are operating it may not comply with the IEC61000-3-2. Please contact us for details.
- \* To meet the specification, do not operate overload condition.
- \* Parallel operation is not possible.
- \* Sound noise may be emitted from the power supply depending on operating conditions.

External view

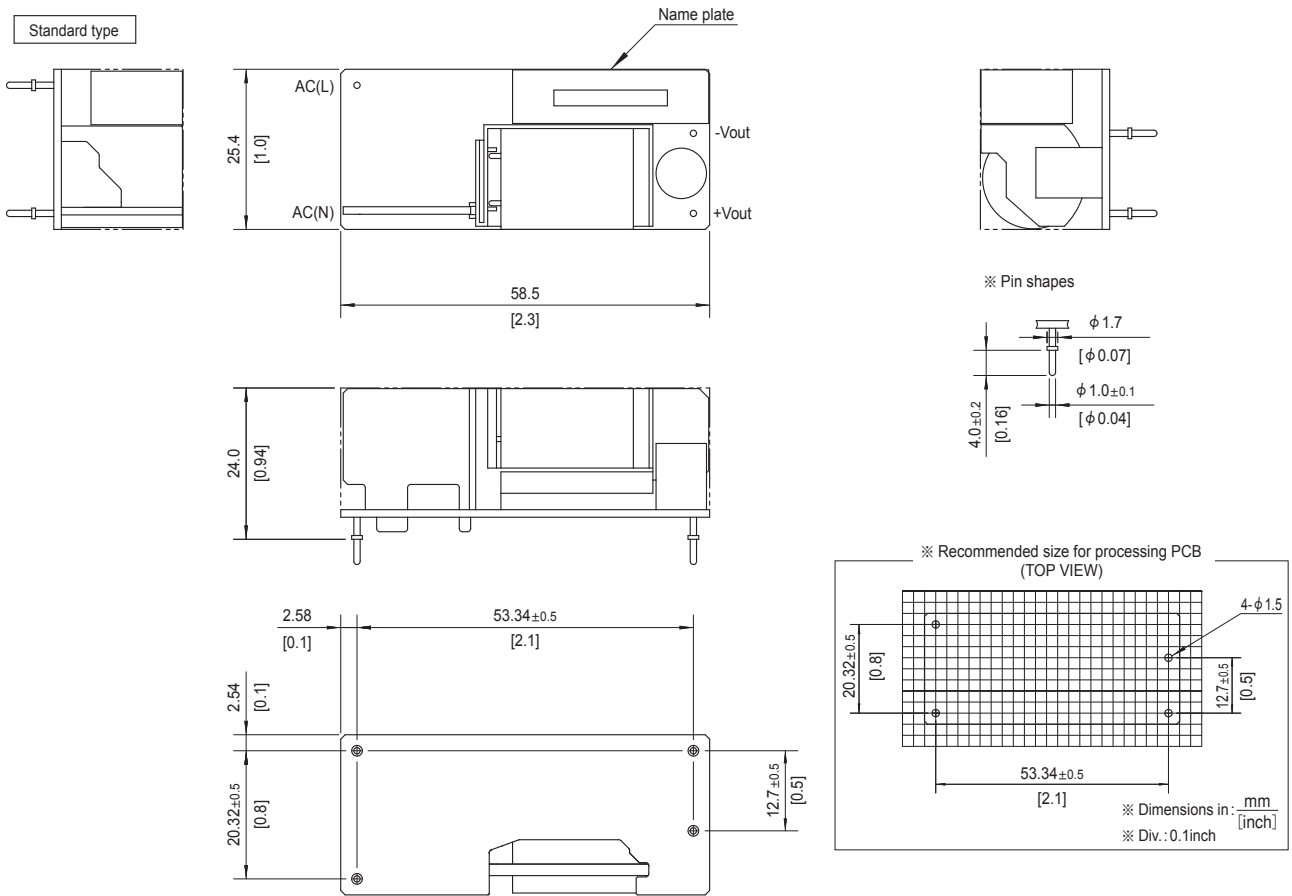

- ※ Dimensions in mm, [ ]=inches
- ※ Tolerance : ±1.5 [±0.06]
- ※ Weight : 60g max
- ※ PCB Material / thickness : FR-4 / 1.1 [0.04]
- ※ Pin material : Copper
- ※ Plating treatment of pin : Lead free plating

# External view


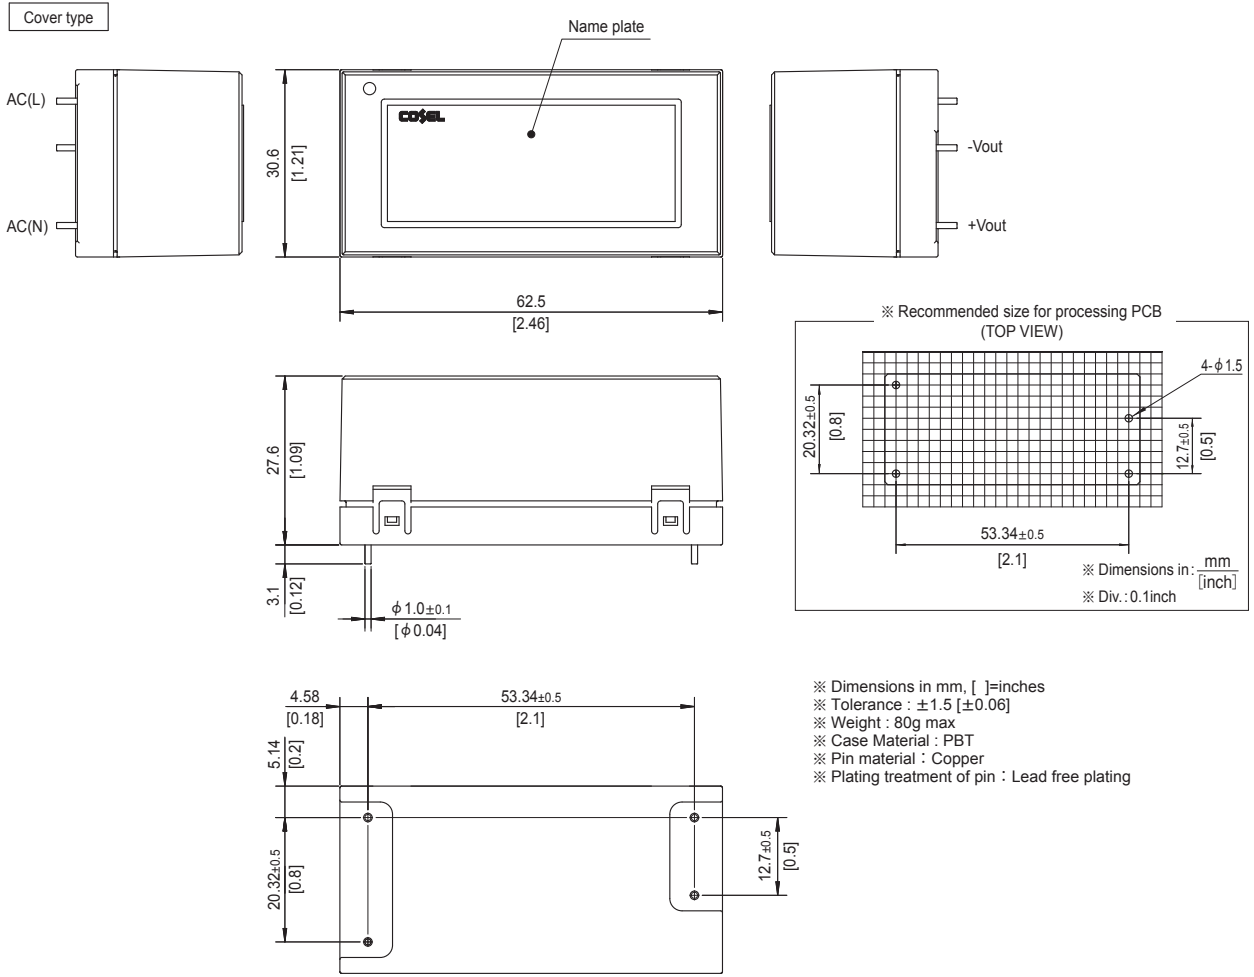




# TEPS65F

TEP S 65 F   -

① ② ③ ④ ⑤ ⑥

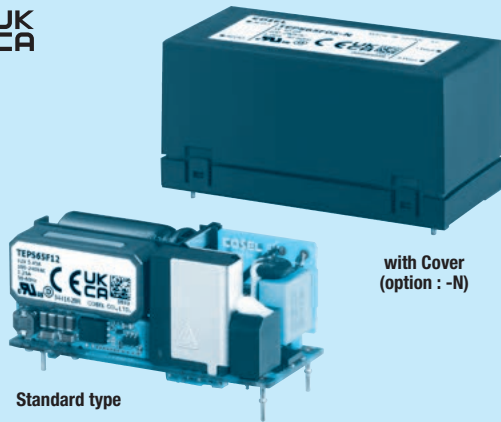

- ① Series name
- ② Single output
- ③ Output wattage
- ④ Universal input
- ⑤ Output voltage
- ⑥ Optional \*1
- E2: Low leakage current
- H : with output peak current (12V,24V)
- N : with cover

ClassII

This power supply is manufactured by SMD technology. The stress to PCB like twisting or bending causes the defect of the unit, so handle the unit with care.  
\*Make sure necessary tests will be carried out on your end equipment with the power supply installed in accordance with any required EMC/EMI regulations.


| MODEL                  | TEPS65F05 | TEPS65F12 | TEPS65F12-H      | TEPS65F24 | TEPS65F24-H      |
|------------------------|-----------|-----------|------------------|-----------|------------------|
| MAX OUTPUT WATTAGE [W] | 50.0      | 65.4      | 65.4 (90.0)      | 66.0      | 66.0 (90.0)      |
| DC OUTPUT              | 5V 10.0A  | 12V 5.45A | 12V 5.45 (7.50)A | 24V 2.75A | 24V 2.75 (3.75)A |

## SPECIFICATIONS

|                               | MODEL  | TEPS65F05   | TEPS65F12      | TEPS65F12-H      | TEPS65F24      | TEPS65F24-H      |         |
|-------------------------------|--|---|----------------|------------------|----------------|------------------|---------|
| INPUT                         | VOLTAGE [VAC]  | *2 85 - 264 1 φ (Refer to "Derating" and Instruction Manual 3.1)                                    |                |                  |                |                  |         |
|                               | CURRENT [A]  | ACIN 100V   | 1.00typ        | 1.25typ          |                |                  |         |
|                               |  | ACIN 230V   | 0.55typ        | 0.70typ          |                |                  |         |
|                               | FREQUENCY [Hz]   | 50 / 60 (45 - 66)   |                |                  |                |                  |         |
|                               | EFFICIENCY [%]   | ACIN 100V   | 90.0typ        | 91.5typ          | 91.5typ        | 92.5typ          | 92.5typ |
|                               |  | ACIN 230V   | 91.5typ        | 93.0typ          | 93.0typ        | 93.5typ          | 93.5typ |
| INRUSH CURRENT [A]            | ACIN 100V  | 30typ (I <sub>o</sub> =100%) Ta=25°C at cold start  |                |                  |                |                  |         |
|                               | ACIN 230V  | 65typ (I <sub>o</sub> =100%) Ta=25°C at cold start  |                |                  |                |                  |         |
| LEAKAGE CURRENT [mA]          | 0.25max (ACIN 240V, 60Hz, I <sub>o</sub> =100%, According to IEC62368-1, and DEN-AN) |   |                |                  |                |                  |         |
| OUTPUT                        | VOLTAGE [V]  | 5   | 12             | 12               | 24             | 24               |         |
|                               | CURRENT [A]  | *2 10.0   | 5.45           | 5.45 (Peak 7.50) | 2.75           | 2.75 (Peak 3.75) |         |
|                               | LINE REGULATION [mV]   | *3 20max  | 48max          | 48max            | 96max          | 96max            |         |
|                               | LOAD REGULATION [mV]   | *3 40max  | 100max         | 100max           | 150max         | 150max           |         |
|                               | RIPPLE [mVp-p]   | *4 -10 to +50°C *5 240max   | 300max         | 300max           | 360max         | 360max           |         |
|                               | RIPPLE NOISE [mVp-p]   | *4 -10 to +50°C *5 300max   | 380max         | 380max           | 480max         | 480max           |         |
|                               | TEMPERATURE REGULATION [mV]  | 0 to +50°C *5 50max   | 120max         | 120max           | 240max         | 240max           |         |
|                               |  | -10 to +50°C *5 60max   | 150max         | 150max           | 290max         | 290max           |         |
|                               | DRIFT [mV]   | *6 20max  | 48max          | 48max            | 96max          | 96max            |         |
|                               | START-UP TIME [ms]   | 500typ (ACIN 100V, I <sub>o</sub> =100%)  |                |                  |                |                  |         |
|                               | HOLD-UP TIME [ms]  | 10typ (ACIN 100V, I <sub>o</sub> =80%) / 60typ (ACIN 230V, I <sub>o</sub> =100%)                    |                |                  |                |                  |         |
| OUTPUT VOLTAGE SETTING [V]    | 4.90 to 5.30   | 11.50 to 12.50  | 11.50 to 12.50 | 23.00 to 25.00   | 23.00 to 25.00 |                  |         |
| PROTECTION CIRCUIT AND OTHERS | OVERCURRENT PROTECTION   | Works over 105% of rating (works over 101% of peak current at option -H) and recovers automatically |                |                  |                |                  |         |
|                               | OVERVOLTAGE PROTECTION [V]   | 5.50 to 6.50  | 13.20 to 15.60 | 13.20 to 15.60   | 26.40 to 31.20 | 26.40 to 31.20   |         |
|                               | OPERATING INDICATION   | Not provided  |                |                  |                |                  |         |
|                               | REMOTE SENSING   | Not provided  |                |                  |                |                  |         |
| ISOLATION                     | INPUT-OUTPUT   | 3,000VAC 1minute, Cutoff current = 10mA, 500VDC 50MΩ min (At Room Temperature)                      |                |                  |                |                  |         |
| ENVIRONMENT                   | OPERATING TEMP., HUMID. AND ALTITUDE *2  | -10 to +70°C, 20 - 90%RH (Non condensing), (Refer to "Derating"), 5,000m (16,500feet) max           |                |                  |                |                  |         |
|                               | STORAGE TEMP., HUMID. AND ALTITUDE   | -20 to +75°C, 20 - 90%RH (Non condensing), 9,000m (30,000feet) max                                  |                |                  |                |                  |         |
|                               | VIBRATION  | 10 - 55Hz 19.6m/s <sup>2</sup> (2G), 3minutes period, 60minutes each along X, Y and Z axis          |                |                  |                |                  |         |
| SAFETY AND NOISE REGULATIONS  | IMPACT   | 196.1m/s <sup>2</sup> (20G), 11ms, once each X, Y and Z axis  |                |                  |                |                  |         |
|                               | AGENCY APPROVALS   | UL62368-1, C-UL (equivalent to CAN/CSA-C22.2 No.62368-1), EN62368-1, Complies with DEN-AN           |                |                  |                |                  |         |
| OTHERS                        | CONDUCTED NOISE *7   | Complies with CISPR11-B, CISPR32-B, EN55011-B, EN55032-B, FCC Part 15-B, FCC Part 18-B, VCCI-B      |                |                  |                |                  |         |
|                               | HARMONIC ATTENUATOR *8   | Complies with IEC61000-3-2 (Class A) (No built-in power factor correction)                          |                |                  |                |                  |         |
| OTHERS                        | CASE SIZE/WEIGHT   | 25.4 X 27.5 X 58.5mm [1.00 X 1.08 X 2.30 inches] (W X H X D) / 70g max (with cover : 90g max)       |                |                  |                |                  |         |
|                               | COOLING METHOD *2  | Convection/Forced air (Requires external fan) (Refer to "Derating")                                 |                |                  |                |                  |         |


- \*1 The listed options may affect the published standard specifications. Please contact us for detailed product specifications.
- \*2 Derating is required. ( ) means peak current. There is a possibility that an internal device is damaged when the specification is exceeded. Please contact us about the detail.
- \*3 At low load conditions, the burst mode operation will start. To check load regulation, you will need to measure the characteristics at average mode with instruments.
- \*4 This is the value that measured on measuring board with capacitor of 22μF and 0.1μF at 50mm from output terminal. (Refer to Instruction Manual)
- \*5 12V output product, the maximum temperature of 45°C.
- \*6 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C, with the input voltage held constant at the rated input/output.
- \*7 When secondary circuit will be connected to earth, the spec will be changed. (Refer to Instruction Manual 2)
- \*8 Please contact us about another class. When two or more units are operating it may not comply with the IEC61000-3-2. Please contact us for details.
- \* To meet the specification, do not operate overload condition.
- \* Parallel operation is not possible.
- \* Sound noise may be emitted from the power supply depending on operating conditions.

External view

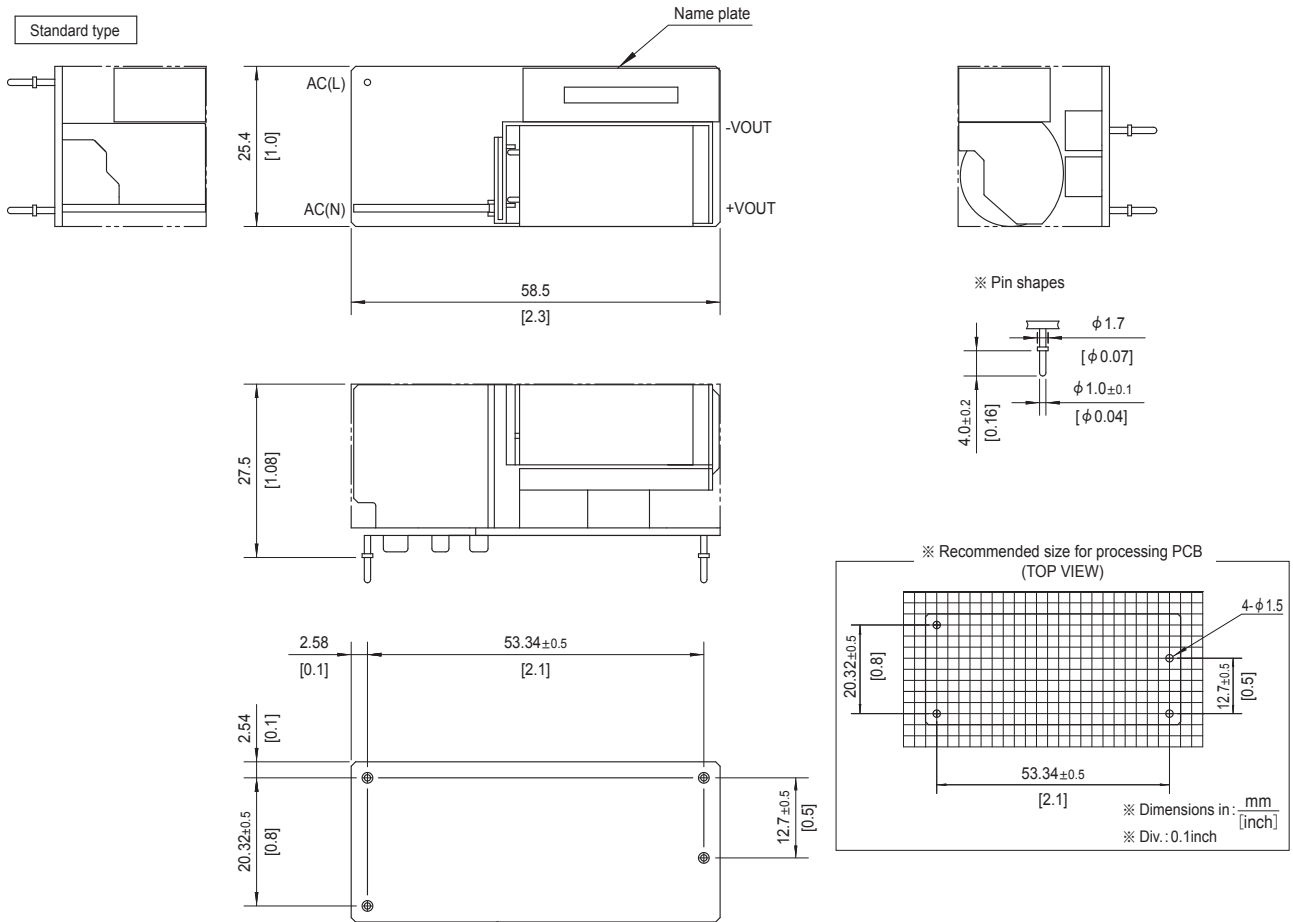

- ※ Dimensions in mm, [ ]=inches
- ※ Tolerance : ±1.5 [±0.06]
- ※ Weight : 70g max
- ※ PCB Material / thickness : FR-4 / 1.1 [0.04]
- ※ Pin material : Copper
- ※ Plating treatment of pin : Lead free plating


# External view

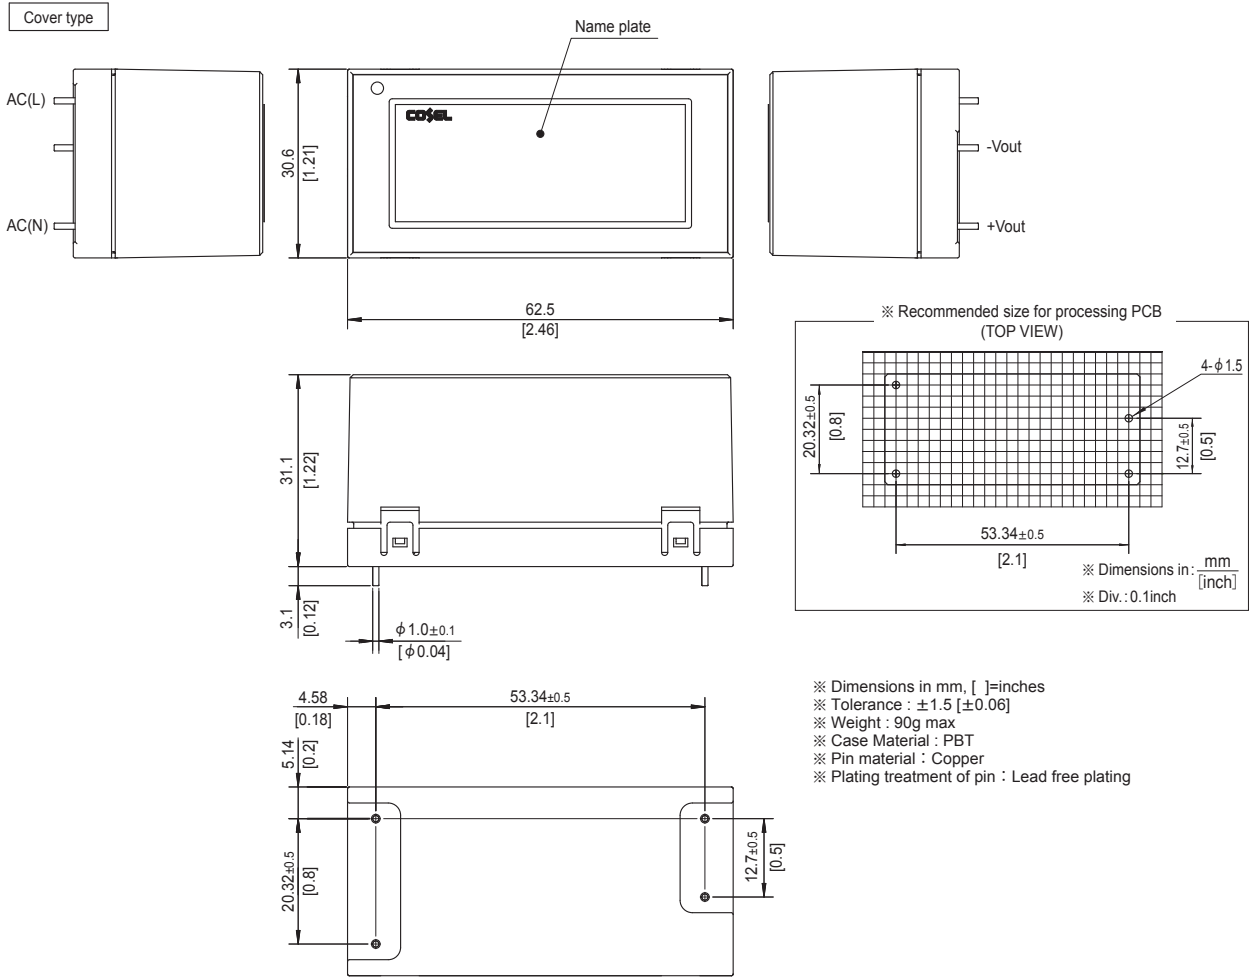



Pin Configuration

TEPS45F/TEPS65F

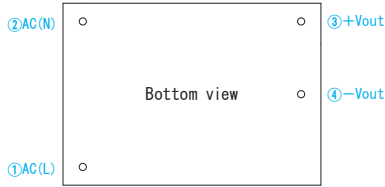


| No. | Pin connection | Function   |
|-----|----------------|------------|
| ①   | AC (L)         | AC input   |
| ②   | AC (N)         |            |
| ③   | +Vout          | +DC output |
| ④   | -Vout          | -DC output |


Implementation • Mounting Method

Mounting method


- When two or more power supplies are used side by side, position them with proper intervals to allow enough air ventilation. The temperature around each power supply should not exceed the temperature range shown in derating curve.
- Standard model can be mounted in the mounting position shown in the figure below.

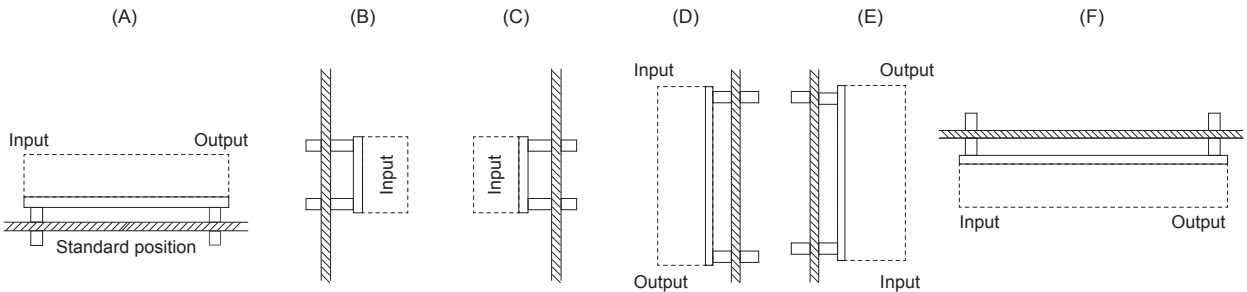

- Option-N model can be mounted in the mounting position shown in the figure below. The installation of (F) possible only forced air cooling.

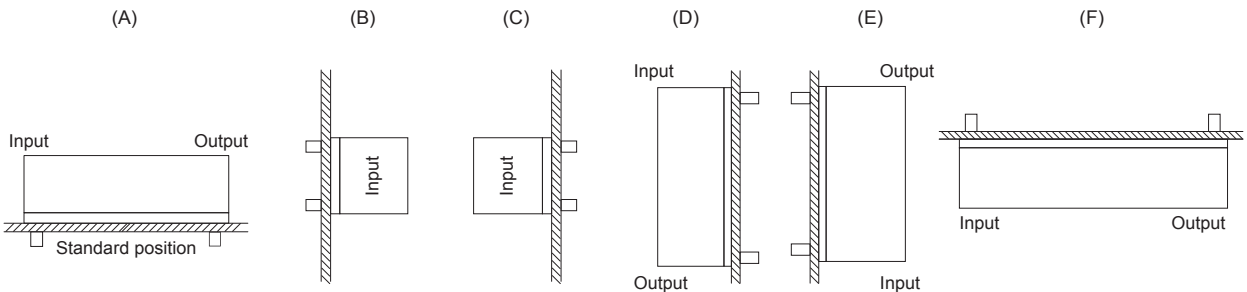

- Avoid placing the AC input line pattern layout underneath the unit. It will increase the line conducted noise. Make sure to leave an ample distance between the line pattern layout and the unit. Also avoid placing the DC output line pattern underneath the unit because it may increase the output noise. Lay out the pattern away from the unit.
- When installing the components (inclusive chassis) or pattern which is a foreign potentials around the unit, keep the distance for more than 5mm (except -N model).

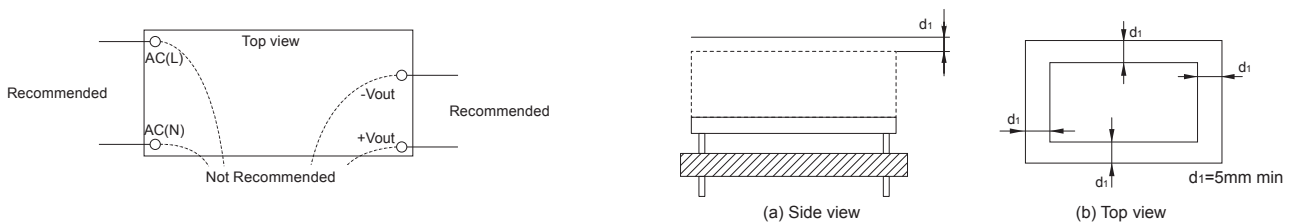

- Do not touch any SMD components on the unit and soldering points.


Soldering

- Flow soldering: 260°C for up to 15 seconds.
- Soldering iron (26W): 450°C for up to 5 seconds.

Implementation • Mounting Method


Stress to the pins

- Applying excessive stress to the input or output pins of the power module may damage internal connections. Avoid applying stress in excess of that shown in right figure.
- Input/output pin are soldered to the PCB internally. Do not pull or bend a lead powerfully.
- If it is expected that stress is applied to the input/output pin due to vibration or impact, reduce the stress to the pin by taking such measures as fixing the unit to the PCB by silicone rubber, etc.




Derating

● Derating curve for input voltage



● TEPS45F

Ambient temperature derating curve at rated input (Reference value)

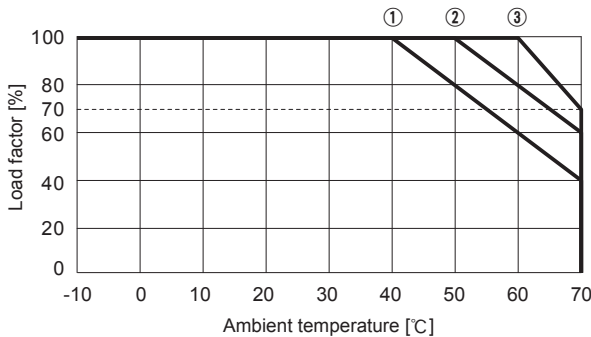


| Cooling method                      | Output voltage | Mounting method  |
|-------------------------------------|----------------|------------------|
|                                     |                | A, B, C, D, E, F |
| Convection                          | 5V             | ①                |
|                                     | 12V            | ①                |
|                                     | 24V            | ②                |
| Forced air (0.5m <sup>3</sup> /min) | 5V, 12V, 24V   | ③                |

■As example, these derating curves have been decided at the below PCB condition.

- FR-4 (Double-sided)
- 203.2mm×76.2mm×1.6mm
- Copper foil thickness : 70μm

● TEPS65F

Ambient temperature derating curve at rated input (Reference value)

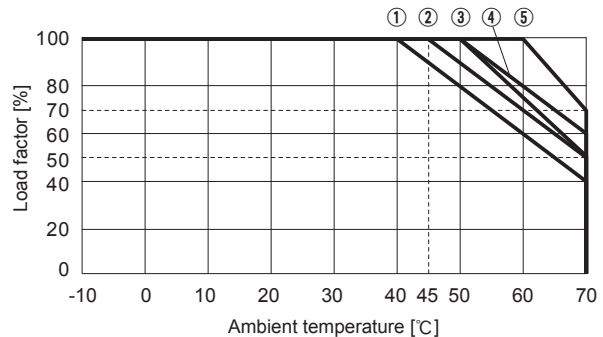


| Cooling method                      | Output voltage | Mounting method |   |   |
|-------------------------------------|----------------|-----------------|---|---|
|                                     |                | A, B, C, E      | D | F |
| Convection                          | 5V             | ③               | ③ | ② |
|                                     | 12V            | ②               | ① | ① |
|                                     | 24V            | ④               | ② | ② |
| Forced air (0.5m <sup>3</sup> /min) | 5V, 12V, 24V   | ⑤               |   |   |

■As example, these derating curves have been decided at the below PCB condition.

- FR-4 (Double-sided)
- 203.2mm×76.2mm×1.6mm
- Copper foil thickness : 70μm

● TEPS45F-N

Ambient temperature derating curve at rated input (Reference value)

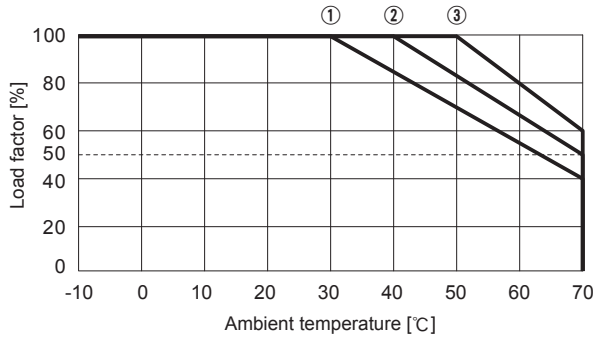


| Cooling method                      | Output voltage | Installation condition |   |
|-------------------------------------|----------------|------------------------|---|
|                                     |                | A, B, C, D, E          | F |
| Convection                          | 5V             | ①                      | - |
|                                     | 12V            | ①                      |   |
|                                     | 24V            | ②                      |   |
| Forced air (0.5m <sup>3</sup> /min) | 5V, 12V, 24V   | ③                      |   |

■ In case of forced air cooling, ventilation must be uniform.

● TEPS65F-N

Ambient temperature derating curve at rated input (Reference value)

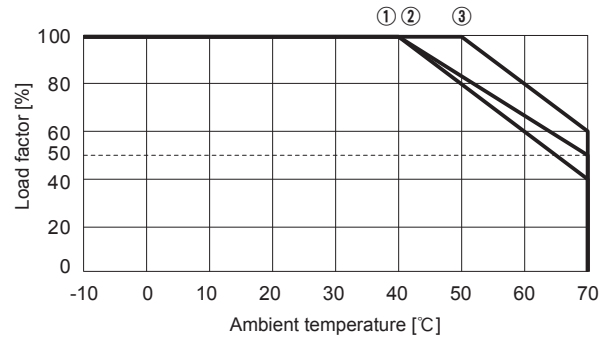

| Cooling method                      | Output voltage | Installation condition |   |
|-------------------------------------|----------------|------------------------|---|
|                                     |                | A, B, C, D, E          | F |
| Convection                          | 5V             | ②                      | - |
|                                     | 12V            | ①                      |   |
|                                     | 24V            | ①                      |   |
| Forced air (0.5m <sup>3</sup> /min) | 5V, 12V, 24V   | ③                      |   |

■ In case of forced air cooling, ventilation must be uniform.

Instruction Manual

◆ Please see catalog and instructionmanual before you use.

Instruction Manual <https://www.cosel.co.jp/redirect/catalog/en/TEPS/>  
 Before using our product <https://en.cosel.co.jp/technical/caution/index.html>

TEPS



NOTICE



Basic Characteristics Data

| Model   | Circuit method    | Switching frequency [kHz] | Input current *1 [A] | Inrush current protection | PCB/Pattern |              |              | Series/Parallel operation availability |                    |
|---------|-------------------|---------------------------|----------------------|---------------------------|-------------|--------------|--------------|--|--------------------|
|         |                   |                           |                      |                           | Material    | Single sided | Double sided | Series operation                       | Parallel operation |
| TEPS45F | Flyback converter | 20 to 250                 | 0.9                  | Thermistor                | FR-4        |              | Yes          | Yes                                    | No                 |
| TEPS65F | Flyback converter | 20 to 800                 | 1.25                 | Thermistor                | FR-4        |              | Multilayer   | Yes                                    | No                 |

\*1 The value of input current is at ACIN 100V and rated load.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Switching Power Supplies](#) category:*

*Click to view products by [Cosel](#) manufacturer:*

Other Similar products are found below :

[70841011](#) [73-551-0005](#) [73-551-0048](#) [73-558-0015I](#) [EVS57-5R3/A](#) [FAS-002](#) [AAD600S-4-OP](#) [MS924](#) [HWS50A-5/RA](#) [KD0204](#) [9021](#)  
[LDIN100150](#) [FAP-001](#) [FP80](#) [FRV7000G](#) [22929](#) [PS3E-F12F](#) [CQM1IA121](#) [LDIN5075](#) [432703037161](#) [VI-LUL-IU](#) [LPM000-BBAR-08](#)  
[LPM000-BBAR-07](#) [08-30466-1055G](#) [DMB-EWG](#) [CQM1IPS01](#) [SP-300-5](#) [MAP40-S233](#) [CQM1-IPS02](#) [73-551-0024I](#) [VI-MUL-ES](#) [22829](#)  
[08-30466-0028G](#) [96PSR-A460WOTH-2](#) [G06-Q01](#) [GHA300F-12-SNF](#) [MP650-2K2K](#) [MTA040009A](#) [FSA150024A](#) [VI-RUR22-EWXX](#)  
[HLS30ZE-NT8](#) [UT1404-7](#) [ERP-350-12](#) [S8FSG01512C](#) [S8FSG03012C](#) [XPFM201A+](#) [S8FS-G15015C](#) [S8FS-G05005C](#) [S8FS-G03015C](#) [08-](#)  
[30466-020WG](#)