


### Features

1. High current transfer ratio ( $V_{CE0}:300V$  MIN)  
(CTR:MIN.600% at  $I_F=1mA$ ,  $V_{ce}=2V$ )
2. High isolation voltage between input and output  
(Viso:5000Vrms).
3. Compact dual-in-line package.
4. Available package : DIP/ SMD/ H. (For Package Dimension please refer to page 82 )


### Applications

1. System appliances, measuring instruments.
2. Industrial robots.
3. Copiers, automatic vending machines.
4. Signal transmission between circuits of different potentials and impedances.
5. Telephone sets.
6. Copiers, facsimiles.
7. Interface with various power supply circuits, power distribution boards.
8. Numerical control machines.

### Outside Dimension : Unit (mm)

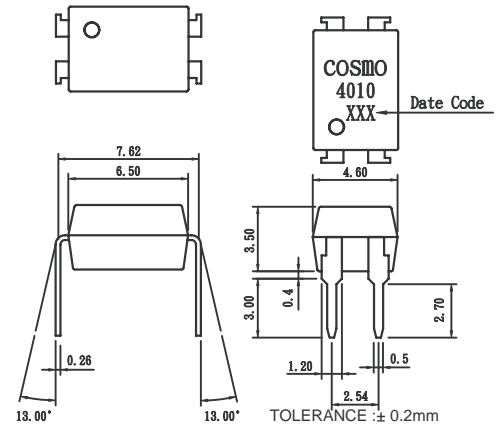

### Schematic : Top View

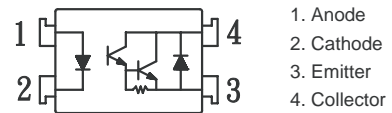

### Absolute Maximum Ratings

( $T_a=25^{\circ}C$ )

| Parameter                       |                             | Symbol    | Rating      | Unit        |
|---------------------------------|-----------------------------|-----------|-------------|-------------|
| Input                           | Forward current             | $I_F$     | 50          | mA          |
|                                 | Peak forward current        | $I_{FM}$  | 1           | A           |
|                                 | Reverse voltage             | $V_R$     | 6           | V           |
|                                 | Power dissipation           | $P_D$     | 70          | mW          |
| Output                          | Collector-emitter voltage   | $V_{CE0}$ | 300         | V           |
|                                 | Emitter-collector voltage   | $V_{ECO}$ | 0.1         | V           |
|                                 | Collector current           | $I_C$     | 150         | mA          |
|                                 | Collector power dissipation | $P_C$     | 200         | mW          |
| Total power dissipation         |                             | $P_{tot}$ | 200         | mW          |
| Isolation voltage 1 minute      |                             | Viso      | 5000        | Vrms        |
| Operating temperature           |                             | $T_{opr}$ | -30 to +100 | $^{\circ}C$ |
| Storage temperature             |                             | $T_{stg}$ | -55 to +125 | $^{\circ}C$ |
| Soldering temperature 10 second |                             | $T_{sol}$ | 260         | $^{\circ}C$ |

### Electro-optical Characteristics

( $T_a=25^{\circ}C$ )


| Parameter                |                                      | Symbol        | Conditions                        | MIN.               | TYP. | MAX. | Unit    |
|--------------------------|--------------------------------------|---------------|-----------------------------------|--------------------|------|------|---------|
| Input                    | Forward voltage                      | $V_F$         | $I_F=20mA$                        | —                  | 1.2  | 1.4  | V       |
|                          | Peak forward voltage                 | $V_{FM}$      | $I_{FM}=0.5A$                     | —                  | —    | 3.5  | V       |
|                          | Reverse current                      | $I_R$         | $V_R=4V$                          | —                  | —    | 10   | $\mu A$ |
|                          | Terminal capacitance                 | $C_t$         | $V=0, f=1kHz$                     | —                  | 30   | —    | pF      |
| Output                   | Collector dark current               | $I_{CEO}$     | $V_{CE}=200V, I_F=0$              | —                  | —    | 1.0  | $\mu A$ |
| Transfer characteristics | Current transfer ratio               | CTR           | $I_F=1mA, V_{CE}=2V$              | 600                | —    | 9000 | %       |
|                          | Collector-emitter saturation voltage | $V_{CE(sat)}$ | $I_F=20mA, I_C=5mA$               | —                  | —    | 1.5  | V       |
|                          | Isolation resistance                 | Riso          | DC500V                            | $5 \times 10^{10}$ | —    | —    | ohm     |
|                          | Floating capacitance                 | $C_f$         | $V=0, f=1MHz$                     | —                  | 0.6  | 1.0  | pF      |
|                          | Cut-off frequency                    | $f_c$         | $V_{CC}=5V, I_C=2mA, R_L=100ohm$  | —                  | 7    | —    | kHz     |
|                          | Response time (Rise)                 | $t_r$         | $V_{CE}=2V, I_C=20mA, R_L=100ohm$ | —                  | 60   | 300  | $\mu s$ |
|                          | Response time (Fall)                 | $t_f$         |                                   | —                  | 50   | 250  | $\mu s$ |

Classification table of current transfer ratio is shown below.


| Model NO. | CTR (%)      |
|-----------|--------------|
| *KP4010 A | 600 TO 2000  |
| KP4010 B  | 1500 TO 4000 |
| KP4010 C  | 3000 TO 6000 |
| *KP4010 D | 5000 TO 9000 |
| KP4010 E  | 600 TO 9000  |

\*SPECIAL OPTION


**Fig.1** Current Transfer Ratio vs. Forward Current

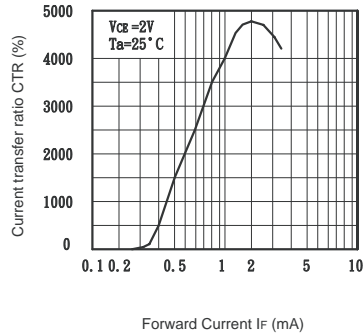


**Fig.2** Collector Power Dissipation vs. Ambient Temperature

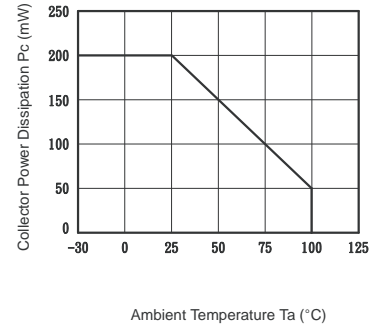


**Fig.3** Collector Dark Current vs. Ambient Temperature

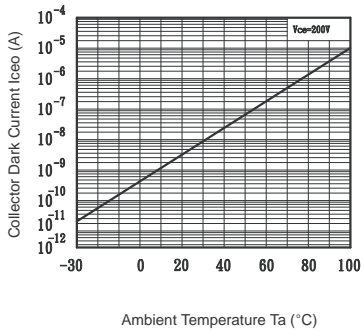


**Fig.4** Forward Current vs. Ambient Temperature

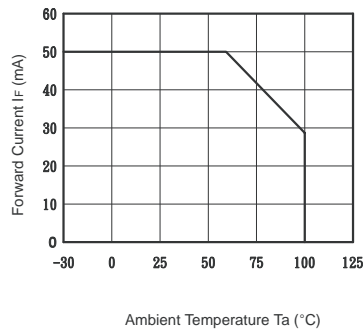


**Fig.5** Forward Current vs. Forward Voltage

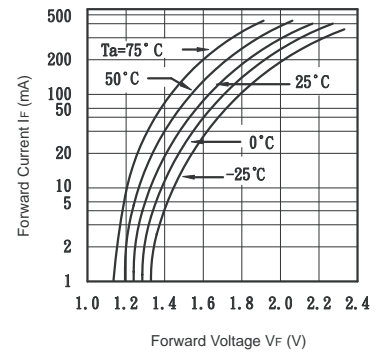


**Fig.6** Collector Current vs. Collector-emitter Voltage

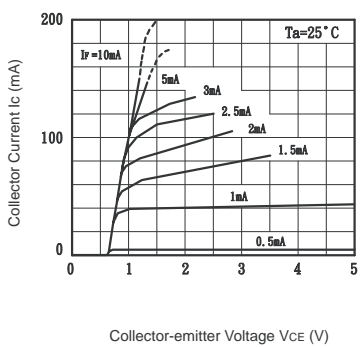


**Fig.7** Relative Current Transfer Ratio vs. Ambient Temperature

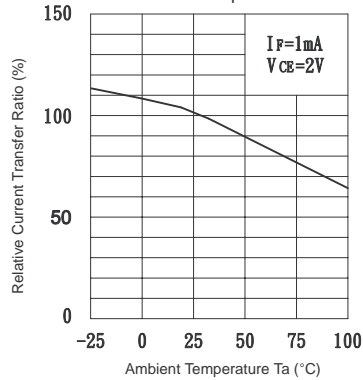

**Fig.8** Collector-emitter Saturation Voltage vs. Forward Current

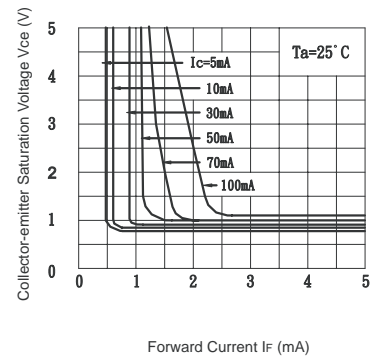

**Fig.9** Response Time vs. Load Resistance

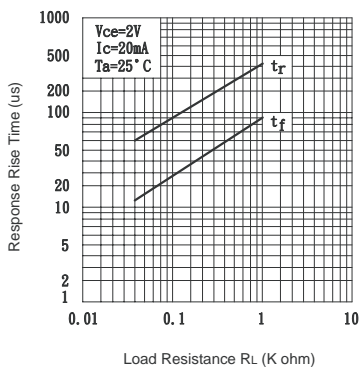

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [High Speed Optocouplers](#) category:*

*Click to view products by [Cosmo](#) manufacturer:*

Other Similar products are found below :

[6N136F](#) [HCPL-2201-300](#) [JAN4N24](#) [610737H](#) [HCPL2630M](#) [HCPL2630SM](#) [PS9817A-1-F3-AX](#) [PS9821-2-F3-AX](#) [PS9121-F3-AX](#)  
[TLP5774H\(TP4,E](#) [TLP5771H\(TP,E](#) [TLP2304\(E\(O](#) [054279X](#) [HCPL2631SD](#) [HCPL-2730-500E](#) [TLP118\(TPL,E\)](#) [TLP2309\(E\(T](#)  
[TLP2366\(TPL,E](#) [TLP2368\(TPL,E\(T](#) [TLP521-2XGB](#) [TLP621-2XGB](#) [JANTXV4N24U](#) [8102802PC](#) [5962-8767902XA](#) [5962-8876801XA](#)  
[5962-8957101PA](#) [SFH6318T](#) [6N135-300E](#) [TIL198](#) [TLP104\(TPR,E\)](#) [TLP2309\(TPL,E\)](#) [TLP2355\(TPL,E](#) [TLP2358\(E\)](#) [TLP521-4GR](#)  
[TLP521-4XGB](#) [TLP621XSM](#) [5962-8876801PA](#) [IS281-4GB](#) [IS2805-4](#) [IS181GR](#) [ICPL2630](#) [ICPL2531](#) [ICPL2601](#) [ICPL2530](#) [TLP2301](#)  
[TLP2362\(TPR,E](#) [TLP754\(F\)](#) [FOD0710R2](#) [FOD260LSDV](#) [ACPL-W61L-500E](#)